

PW7339



PCIe 4.0 (16 GT/s)

RDMA

PW7340



PCIe 4.0 (16 GT/s)

RDMA


PCIe X16 E810CQDA2 Dual-QSFP28 100GbE Server NIC

Chipset: Intel EZE810CAM2 Configuration: 2 x QSFP28 Port
Data Rate Per Port: 100/50/25/10GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 173.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PCIe X16 E810CQDA1 Single-QSFP28 100GbE Server NIC

Chipset: Intel EZE810CAM1 Configuration: 1 x QSFP28 Port
Data Rate Per Port: 100/50/25/10GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 165 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7342

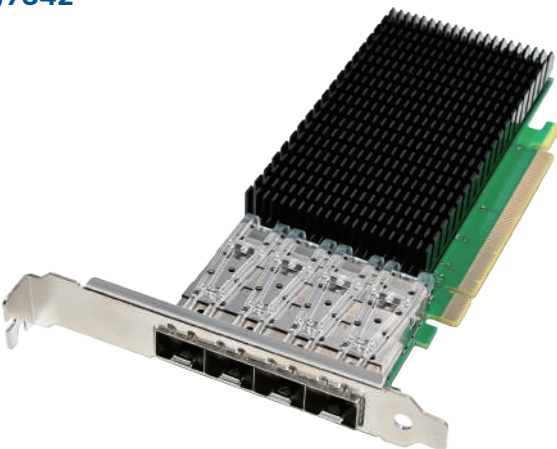

PCIe 4.0 (16 GT/s)

RDMA

PW7341



PCIe 4.0 (16 GT/s)

RDMA

PCIe X16 E810XXVDA4 Quad-SFP28 25GbE Server NIC

Chipset: Intel EZE810CAM1 Configuration: 4 x SFP28 Port
Data Rate Per Port: 25/10/1GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 278 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PCIe X8 E810-XXVDA2 Dual-SFP28 25GbE Server NIC

Chipset: Intel EYE810XXVAM2 Configuration: 2 x SFP28 Port
Data Rate Per Port: 25/10/1GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 174.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7329



PCIe 3.0 (8 GT/s)

RDMA

PW7328



PCIe 3.0 (8 GT/s)

RDMA

PCIe x8 X722DA4 Quad-SFP+ 10GbE Server NIC(RDMA)

Chipset: Intel X722-DA4 Configuration: 4 x SFP+ Port
Data Rate Per Port: 10GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 203.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PCIe x8 X722DA2 Dual-SFP+ 10GbE Server NIC(RDMA)

Chipset: Intel X722-DA2 Configuration: 2 x SFP+ Port
Data Rate Per Port: 10GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 185 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7222



PCIe 3.0 (8 GT/s)

PW7221



PCIe 3.0 (8 GT/s)

PCIe x8 XL710-CQDA1 Single-QSFP+ 40GbE Server NIC

Chipset: Intel FTXL710-BM1 Configuration: 1 x QSFP+ Port
Data Rate Per Port: 40/10/1GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 118.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PCIe x8 XL710-CQDA2 Dual-QSFP+ 40GbE Server NIC

Chipset: Intel FTXL710-BM2 Configuration: 2 x QSFP+ Port
Data Rate Per Port: 40/10/1GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 162.9 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7220




PCIe 3.0 (8 GT/s)

PCIe 3.0 X8 XXV710DA2 Dual-SFP28 25GbE Server NIC

Chipset: Intel FTXV710-AM2 Configuration: 2 x SFP28 Port
Data Rate Per Port: 25/10/1GbE Per Port
Dimension: 167 x 69 mm(PCIe Board) Product weight: 106.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7448

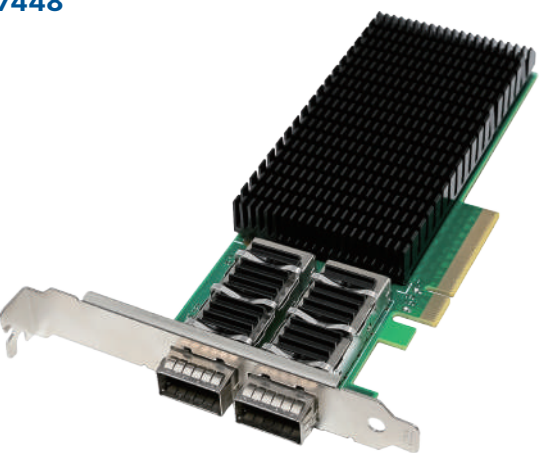

PCIe 3.0 (8 GT/s)

PCIe x8 XL710-CQDA2 Dual- QSFP+ 40GbE Server NIC

Chipset: Intel FTXL710-BM2 Configuration: 2 x QSFP+ Port
Data Rate Per Port: 40/10/1GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 163 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7218




PCIe 3.0 (8 GT/s)

PCIe x8 X710 Dual- 10G SFP+ Ethernet Converged NIC

Chipset: Intel FTX710-BM2 Configuration: 2 x SFP+ Port
Data Rate Per Port: 10/1GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 132.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7219

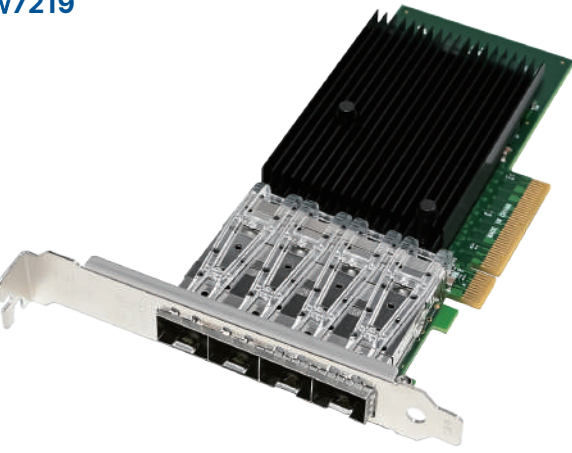

PCIe 3.0 (8 GT/s)

PCIe x8 X710 Quad- 10G SFP+ Ethernet Converged NIC

Chipset: Intel FTXL710-BM1 Configuration: 4 x SFP+ Port
Data Rate Per Port: 10/1GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 147.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7268



PCIe 2.0 (5 GT/s)

PCIe x8 X520 Dual- 10G SFP+ Ethernet Converged NIC

Chipset: Intel JL82599ES Configuration: 2 x SFP+ Port
Data Rate Per Port: 10/1GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 105.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7313




PCIe 2.0 (5 GT/s)

PCIe x8 X520 Quad- 10G SFP+ Ethernet Converged NIC

Chipset: Intel 82599ES + PEX8747 Configuration: 4 x SFP+ Port
Data Rate Per Port: 10/1GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 186.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7379

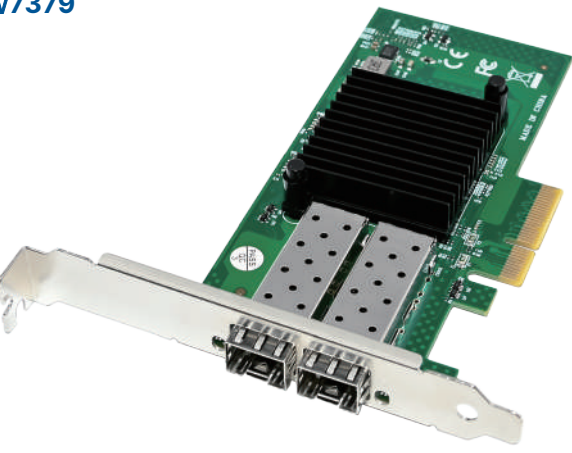

PCIe 2.0 (5 GT/s)

PCIe x4 X520 Dual- 10G SFP+ Ethernet Converged NIC

Chipset: Intel JL82599ES Configuration: 2 x SFP+ Port
Data Rate Per Port: 10/1GbE
Dimension: 130 x 69 mm(PCIe Board) Product weight: 127.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7327



PCIe 2.0 (5 GT/s)

PCIe x8 X520 Dual- 10G SFP+ Ethernet Converged NIC

Chipset: Intel JL82599ES Configuration: 2 x SFP+ Port
Data Rate Per Port: 10/1GbE
Dimension: 130 x 69 mm(PCIe Board) Product weight: 123.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7498



PCIe 2.0 (5 GT/s) WOL + UEFI & PXE

PCIe x4 X520 Single-10G SFP+ Ethernet Converged NIC

Chipset: Intel JL82599EN	Configuration: 1 x SFP+ Port
Data Rate Per Port: 10/1GbE	
Dimension: 119 x 67 mm(PCIe Board)	Product weight: 70.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual	
1 x Neutral box	

PW7526



PCIe 2.0 (5 GT/s) RDMA

PCIe x1 X520 Single-10G SFP+ Ethernet Converged NIC

Chipset: Intel JL82599EN	Configuration: 1 x SFP+ Port
Data Rate Per Port: 10/1GbE	
Dimension: 119 x 67 mm(PCIe Board)	Product weight: 70.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual	
1 x Neutral box	

PW7211



PCIe 2.0 (5 GT/s)

PCIe x8 X520 Single-10G SFP+ Ethernet Converged NIC

Chipset: Intel JL82599EN	Configuration: 1 x SFP+ Port
Data Rate Per Port: 10/1GbE	
Dimension: 145 x 69 mm(PCIe Board)	Product weight: 98.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual	
1 x Neutral box	

PW723



PCIe 2.0 (5 GT/s)

PCIe x8 X520 Dual-10G SFP+ Ethernet Converged NIC

Chipset: Intel JL82599ES	Configuration: 2 x SFP+ Port
Data Rate Per Port: 10/1GbE	
Dimension: 145 x 69 mm(PCIe Board)	Product weight: 107.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual	
1 x Neutral box	

Product Updates stay tuned

PW7315



PCIe 2.0 (5 GT/s) PXE & UEFI

PCIe x4 X520 Single-10G SFP+ Ethernet Converged NIC

Chipset: Intel JL82599EN	Configuration: 1 x SFP+ Port
Data Rate Per Port: 10/1GbE	
Dimension: 130 x 69 mm(PCIe Board)	Product weight: 76.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual	
1 x Neutral box	

PW7316



PCIe 2.0 (5 GT/s)

PCIe x8 X520 Single-10G SFP+ Ethernet Converged NIC

Chipset: Intel JL82599EN	Configuration: 1 x SFP+ Port
Data Rate Per Port: 10/1GbE	
Dimension: 130 x 69 mm(PCIe Board)	Product weight: 77.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual	
1 x Neutral box	

PW7278



PCIe 2.0 (5 GT/s)

PCIe x8 X520 Single-10G SFP+ Ethernet Converged NIC

Chipset: Intel JL82599EN	Configuration: 1 x SFP+ Port
Data Rate Per Port: 10/1GbE	
Dimension: 167 x 69 mm(PCIe Board)	Product weight: 95.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual	
1 x Neutral box	

PW7468




PCIe 2.0 (5 GT/s)

PCIe x8 X520 Single-10G SFP+ Ethernet Converged NIC

Chipset: Intel JL82599EN	Configuration: 1 x SFP+ Port
Data Rate Per Port: 10/1GbE	
Dimension: 130 x 69 mm(PCIe Board)	Product weight: 74.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual	
1 x Neutral box	

PW7407

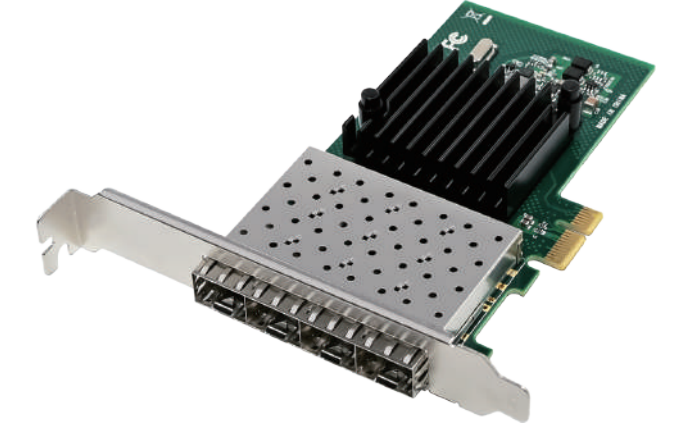


PCIe 2.1(5 GT/s)

PCIe x1 I350-F4 Quad- SFP Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM4 Configuration: 4 x SFP Port
Data Rate Per Port: 1GbE
Dimension: 120 x 69 mm(PCIe Board) Product weight: 83.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7212

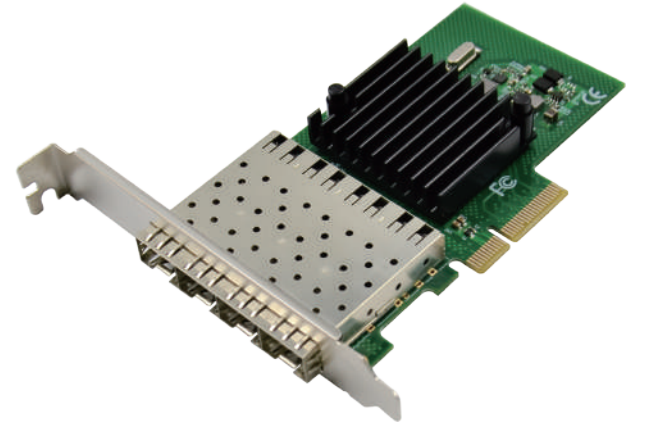


PCIe 2.1(5 GT/s)

PCIe x4 I350F4 Quad-Port 1GbE SFP Fiber Server NIC

Chipset: Intel NHI350AM4 Configuration: 4 x SFP Port
Data Rate Per Port: 1GbE
Dimension: 120 x 69 mm(PCIe Board) Product weight: 83.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW728

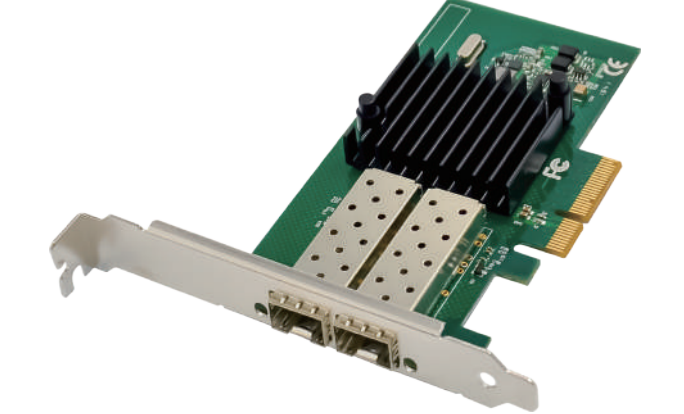

PCIe 2.1(5 GT/s)

PCIe x4 I350-F2 Dual- SFP Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM2 Configuration: 2 x SFP Port
Data Rate Per Port: 1GbE
Dimension: 113 x 69 mm(PCIe Board) Product weight: 82.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7256



PCIe 2.1(5 GT/s)

PCIe x1 I350-F2 Dual- SFP Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM2 Configuration: 2 x SFP Port
Data Rate Per Port: 1GbE
Dimension: 113 x 69 mm(PCIe Board) Product weight: 80.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7296




PCIe 2.0 (2.5GT/s)

PCIe x1 82576 Single- SFP Gigabit Ethernet Server NIC

Chipset: Intel JL82576EB Configuration: 1 x SFP Port
Data Rate Per Port: 1GbE
Dimension: 98 x 69 mm(PCIe Board) Product weight: 59.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7404

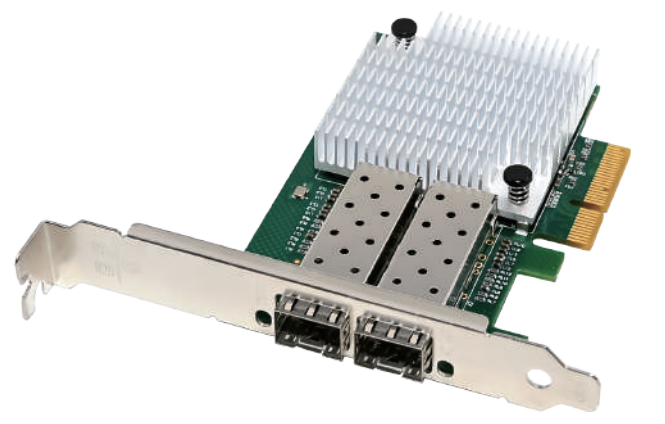

PCIe 2.0 (2.5GT/s)

PCIe x4 82576 Dual- SFP Gigabit Ethernet Server NIC

Chipset: Intel JL82576EB Configuration: 2 x SFP Port
Data Rate Per Port: 1GbE
Dimension: 98 x 69 mm(PCIe Board) Product weight: 81.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW722




PCIe 2.0 (2.5GT/s)

PCIe x4 82576 Dual- SFP Gigabit Ethernet Server NIC

Chipset: Intel JL82576EB Configuration: 2 x SFP Port
Data Rate Per Port: 1GbE
Dimension: 113 x 69 mm(PCIe Board) Product weight: 65 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7257

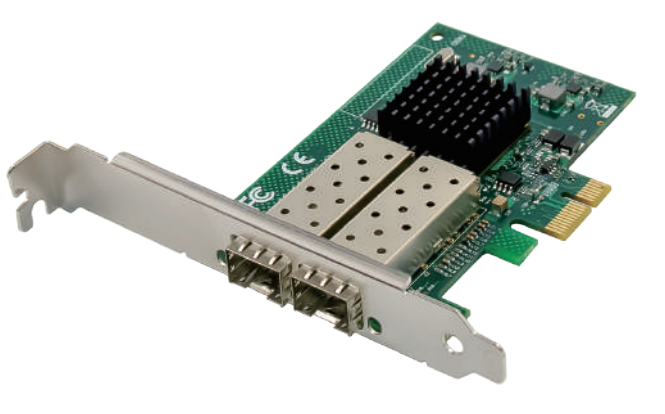


PCIe 2.0 (2.5GT/s)

PCIe x1 82576 Dual- SFP Gigabit Ethernet Server NIC

Chipset: Intel JL82576EB Configuration: 2 x SFP Port
Data Rate Per Port: 1GbE
Dimension: 113 x 69 mm(PCIe Board) Product weight: 62 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7390

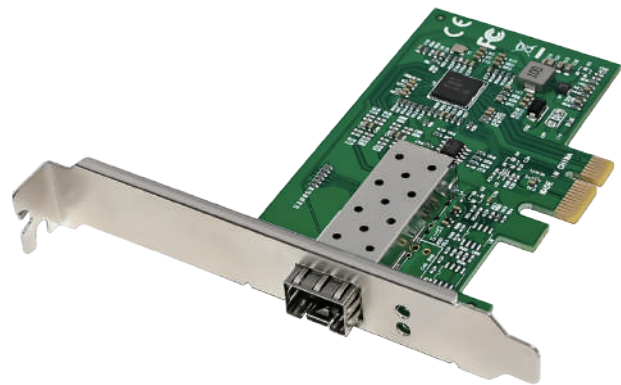

PCIe 2.1 (2.5 GT/s)

PCIe x1 I210-F1 Single-SFP Gigabit Ethernet Server NIC

Chipset: Intel WGI210CS Configuration: 1 x SFP Port
Data Rate Per Port: 1GbE
Dimension: 96 x 62 mm(PCIe Board) Product weight: 42.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW721



PCIe 2.1 (2.5 GT/s)

PCIe x1 I210-F1 Single-SFP Gigabit Ethernet Server NIC

Chipset: Intel WGI210CS Configuration: 1 x SFP Port
Data Rate Per Port: 1GbE
Dimension: 105 x 56 mm(PCIe Board) Product weight: 42.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7391




PCIe 2.0 (2.5 GT/s)

PCIe x1 82576 Single- SC Gigabit Ethernet Server NIC

Chipset: Intel JL82576EB Configuration: 1 x SC Fiber
Data Rate Per Port: 1GbE
Dimension: 115 x 67 mm(PCIe Board) Product weight: 75.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7383

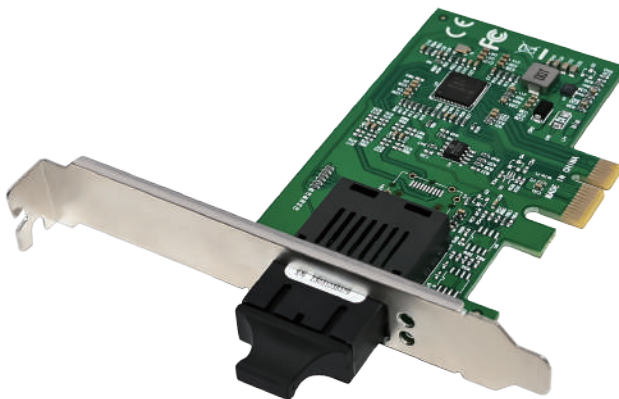


PCIe 2.1 (2.5 GT/s)

PCIe x1 I210-F1 Single-SC Gigabit Ethernet Server NIC

Chipset: Intel WGI210CL Configuration: 1 x SC Fiber
Data Rate Per Port: 1GbE
Dimension: 96 x 62 mm(PCIe Board) Product weight: 46.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW711

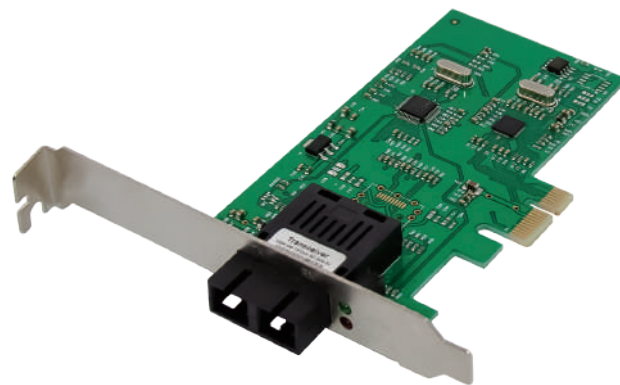


PCIe 1.1 (2.5 GT/s)

PCIe x1 8105E Single- SC Fast Ethernet Network Card

Chipset: Realtek RTL8105E Configuration: 1 x SC Fiber
Data Rate Per Port: 100 Mbps (Fiber)
Dimension: 113 x 65 mm(PCIe Board) Product weight: 49.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW7317

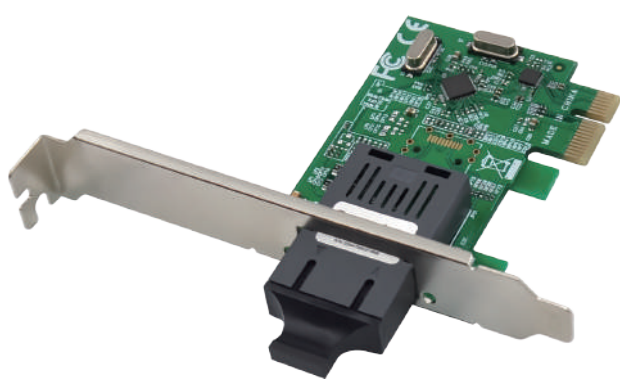

PCIe 1.1 (2.5 GT/s)

PCIe x1 8106E Single- SC Fast Ethernet Network Card

Chipset: Realtek RTL8105E Configuration: 1 x SC Fiber
Data Rate Per Port: 100 Mbps (Fiber)
Dimension: 70 x 65 mm(PCIe Board) Product weight: 38.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW7261



PCI IP100A Single-SC Fiber Fast Ethernet Network Card

Chipset: IC+Plus IP100A Configuration: 1 x SC Fiber
Data Rate Per Port: 100 Mbps (Fiber)
Dimension: 120 x 50 mm (PCI Board) Product weight: 48.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW7415

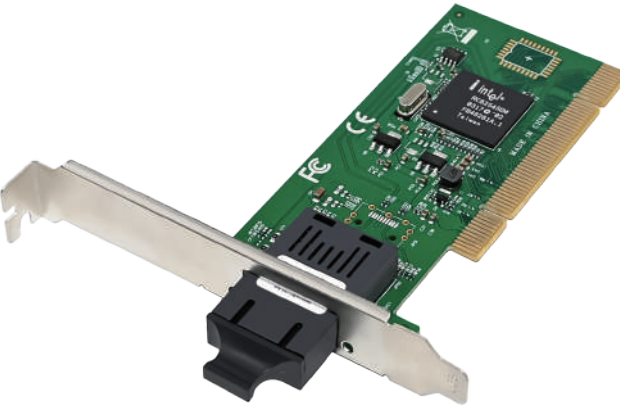

PCI 82545EM Single-SC Gigabit Ethernet Network Card

Chipset: Intel RC82545EM Configuration: 1 x SC Fiber
Data Rate Per Port: 1000 Mbps (Fiber)
Dimension: 119 x 53 mm (PCI Board) Product weight: 50 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7441

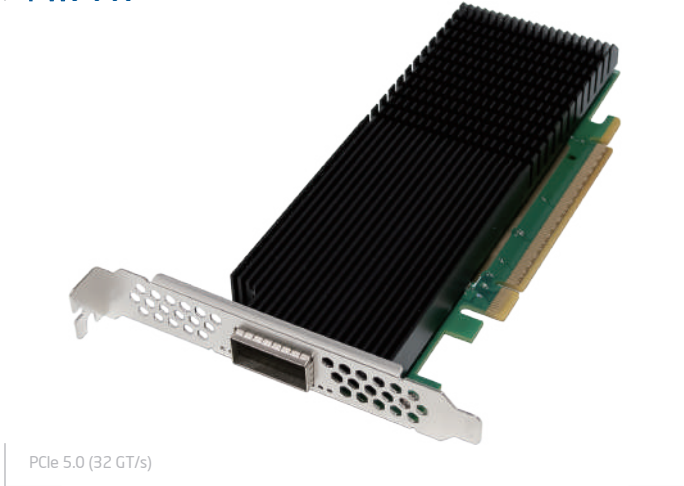

PCIe 5.0 (32 GT/s)

PCIe x16 CX-7 Single-OSFP 400G InfiniBand Server NIC

Chipset: MCX75310AAS-NEAT Configuration: 1 x OSFP Port
Supported Ethernet speeds: 400/200/100/50/25/10GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 203.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW




PCIe 5.0 (32 GT/s)

PCIe x16 CX-7 Single-OSFP 200G InfiniBand Server NIC

Chipset: MCX75310AAS-HEAT Configuration: 1 x OSFP Port
Supported Ethernet Speeds: 200/100/50/25/10GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 203.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7439

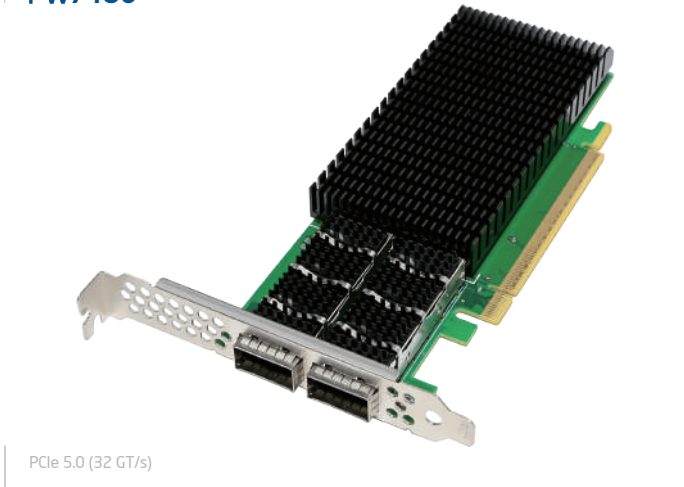

PCIe 5.0 (32 GT/s)

PCIe x16 CX-7 Dual-QSFP56 200G InfiniBand Server NIC

Chipset: MCX75310AAS-HEAT Configuration: 2 x QSFP56 Port
Supported Ethernet Speeds: 200/100/50/40/25/10GbE
Dimension: 170 x 69 mm(PCIe Board) Product weight: 182.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7438



PCIe 4.0 (16 GT/s)

PCIe x16 CX-6 Dual-QSFP56 200G InfiniBand Server NIC

Chipset: MCX653106A-HDAT Configuration: 2 x QSFP56 Port
Supported Ethernet Speeds: 200/100/50/40/25/10GbE
Dimension: 170 x 69 mm(PCIe Board) Product weight: 183.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7437



PCIe 4.0 (16 GT/s)

PCIe x16 CX-6 Dual-QSFP56 100G InfiniBand SmartNIC

Chipset: MCX623106AN-CDAT Configuration: 2 x QSFP56 Port
Supported Ethernet Speeds: 100/50/40/25/10GbE
Dimension: 142 x 69 mm(PCIe Board) Product weight: 147.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7338




PCIe 3.0 (8 GT/s)

PCIe3.0 X16 ConnectX-5 Dual-QSFP28 100G Server NIC

Chipset: MCX515A-CCAT Configuration: 2 x QSFP28 Port
Supported Ethernet Speeds: 100/50/40/25/10/1GbE
Dimension: 150 x 68 mm(PCIe Board) Product weight: 154.9 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7436

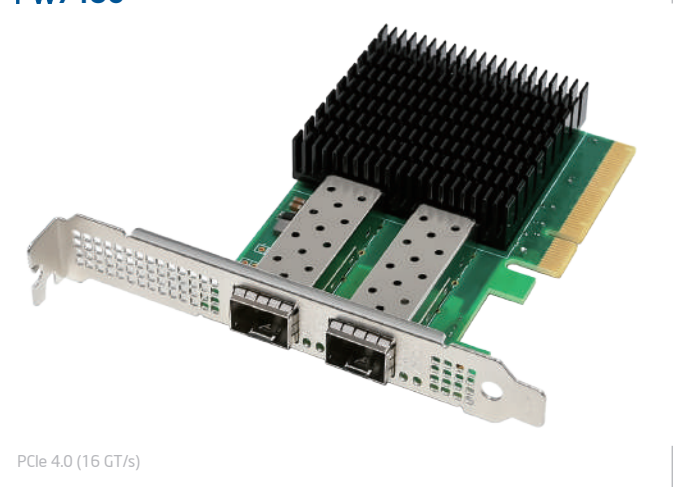

PCIe 4.0 (16 GT/s)

PCIe 4.0 X8 ConnectX-6 Dual-SFP28 25GbE SmartNIC

Chipset: ConnectX-6 Lx Configuration: 2 x SFP28 Port
Supported Ethernet Speeds: 25/10GbE
Dimension: 95 x 69 mm(PCIe Board) Product weight: 93.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7337



PCIe 3.0 (8 GT/s)

PCIe3.0 X8 ConnectX-5 Dual-SFP28 25GbE Server NIC

Chipset: ConnectX-5 Configuration: 2 x SFP28 Port
Supported Ethernet Speeds: 25/10/1GbE
Dimension: 145 x 68 mm(PCIe Board) Product weight: 137.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7386



PW7336



PCIe4.0 X16 ConnectX-5 Dual-QSFP28 100G Server NIC

PCIe x16 ConnectX-4 Dual- QSFP28 100GbE Server NIC

Chipset: MCX516A-CDAT Configuration: 2 x QSFP28 Port
Supported Ethernet Speeds: 100/50/40/25/10/1GbE
Dimension: 150 x 68 mm(PCIe Board) Product weight: 155.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

Chipset: ConnectX-4 Configuration: 2 x QSFP28 Port
Supported Ethernet Speeds: 100/50/40/25/10/1GbE
Dimension: 150 x 68 mm(PCIe Board) Product weight: 156.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7330



PW7493



PCIe3.0 X8 ConnectX-4 Dual-QSFP28 50GbE Server NIC

PCIe3.0 X8 ConnectX-4 Single- SFP28 25G Server NIC


Chipset: MCX4131A-GCAT Configuration: 1 x QSFP28 Port
Supported Ethernet Speeds: 50/40/25/10/1GbE
Dimension: 150 x 68 mm(PCIe Board) Product weight: 154 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

Chipset: MCX4411A-ACAN Configuration: 1 x SFP28 Port
Supported Ethernet Speeds: 25/10/1GbE
Dimension: 142 x 68 mm(PCIe Board) Product weight: 102 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7312



PW7369

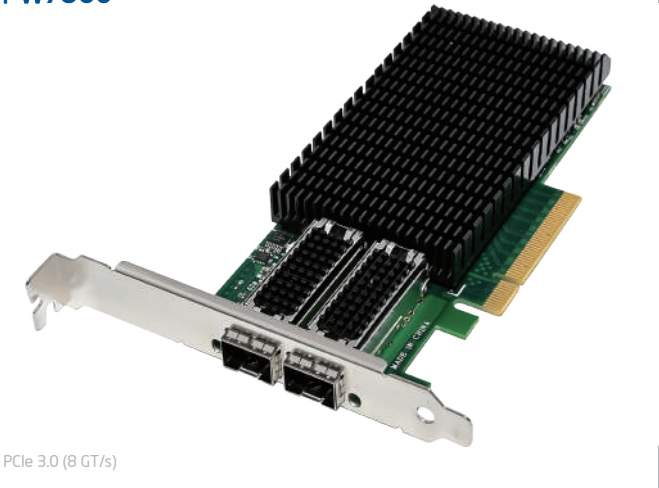

PCIe x8 ConnectX-4 LX Dual- SFP28 25GbE Server NIC

PCIe x8 ConnectX-4 LX Dual- 25GbE SFP28 Server NIC

Chipset: MCX4411A-ACAN Configuration: 2 x SFP28 Port
Supported Ethernet Speeds: 25/10/1GbE
Dimension: 150 x 68 mm(PCIe Board) Product weight: 139.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

Chipset: MCX4411A-ACAN Configuration: 2 x SFP28 Port
Supported Ethernet Speeds: 25/10/1GbE
Dimension: 150 x 68 mm(PCIe Board) Product weight: 153.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7380



PW7350




PCIe x16 ConnectX-4 LX Quad-SFP28 10GbE Server NIC

PCIe x16 ConnectX-4 LX Quad-SFP28 25GbE Server NIC

Chipset: ConnectX-4 Configuration: 4 x SFP28 Port
Supported Ethernet Speeds: 10/1GbE
Dimension: 150 x 68 mm(PCIe Board) Product weight: 193.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

Chipset: ConnectX-4 Configuration: 4 x SFP28 Port
Supported Ethernet Speeds: 25/10/1GbE
Dimension: 150 x 68 mm(PCIe Board) Product weight: 195.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7374

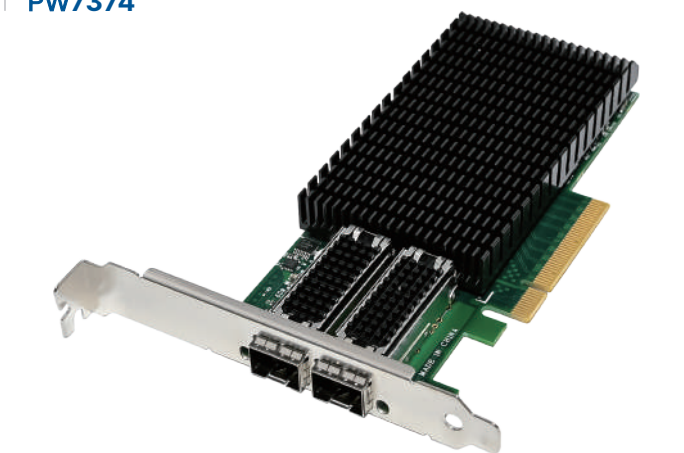

PCIe 3.0 (8 GT/s)

PCIe x8 ConnectX-4 LX Dual- SFP28 10GbE Server NIC

Chipset: MCX4121A-XCAT Configuration: 2 x SFP28 Port
Supported Ethernet Speeds: 10/1GbE
Dimension: 150 x 68 mm(PCIe Board) Product weight: 153.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7286



PCIe 3.0 (8 GT/s)

PCIe 3.0 X8 ConnectX-3 Dual- SFP+ 10GbE Server NIC

Chipset: ConnectX-3 Configuration: 2 x SFP+ Port
Supported Ethernet Speeds: 10/1GbE
Dimension: 165 x 69 mm(PCIe Board) Product weight: 110 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7288



PCIe 3.0 (8 GT/s)

PCIe 3.0 X8 ConnectX-3 Dual-QSFP+ 40GbE Server NIC

Chipset: ConnectX-3 Configuration: 2 x QSFP+ Port
Supported Ethernet Speeds: 40/10/1GbE
Dimension: 150 x 68 mm(PCIe Board) Product weight: 139.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7295



PCIe 3.0 (8 GT/s)

PCIe 3.0 X8 ConnectX-3 Dual-QSFP+ 56GbE Server NIC

Chipset: ConnectX-3 Configuration: 2 x QSFP+ Port
Supported Ethernet Speeds: 56/40/10/1GbE
Dimension: 150 x 68 mm(PCIe Board) Product weight: 139.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7306



PCIe 3.0 (8 GT/s)

PCIe3.0 X8 ConnectX-3 Single-SFP+ 10GbE Server NIC

Chipset: ConnectX-3 Configuration: 1 x SFP+ Port
Supported Ethernet Speeds: 10/1GbE
Dimension: 165 x 69 mm(PCIe Board) Product weight: 103.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7294




PCIe 3.0 (8 GT/s)

PCIe X8 ConnectX-3 Single- QSFP+ 40GbE Server NIC

Chipset: ConnectX-3 Configuration: 1 x QSFP+ Port
Supported Ethernet Speeds: 40/10/1GbE
Dimension: 150 x 68 mm(PCIe Board) Product weight: 128.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7506

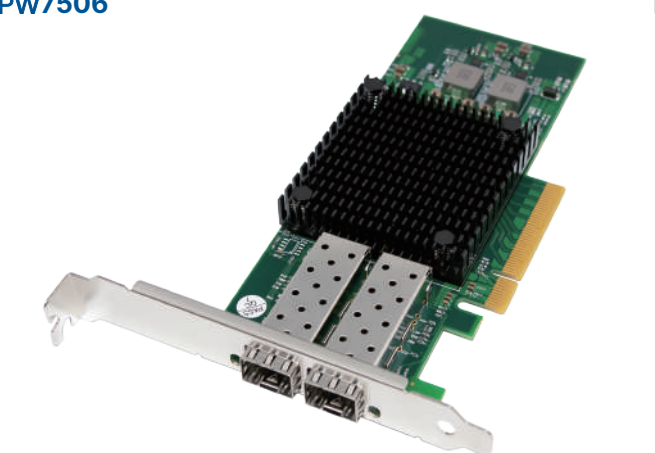

PCIe 3.0 (8 GT/s) UEFI

PCIe x8 ConnectX-3 Dual-SFP+ 10GbE Server NIC UEFI

Chipset: ConnectX-3 Configuration: 2 x SFP+ Port
Supported Ethernet Speeds: 10/1GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 118.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7507



PCIe 3.0 (8 GT/s) UEFI

PCIe x8 ConnectX-3 Single- SFP+ 10G Server NIC UEFI

Chipset: ConnectX-3 Configuration: 1 x SFP+ Port
Supported Ethernet Speeds: 10/1GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 162.9 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7508

Product Updates
stay tuned

PCIe 3.0 (8 GT/s)

PCIe x4 ConnectX-3 Single-SFP+ 10GbE Server NIC 2.0

Chipset: ConnectX-3	Configuration: 1 x SFP+ Port
Supported Ethernet Speeds: 10/1GbE	
Dimension: 167 x 69 mm(PCIe Board)	Product weight: 173.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual 1 x Neutral box	

PW7509

Product Updates
stay tuned

PCIe 3.0 (8 GT/s)

PCIe x8 ConnectX-3 Dual-QSFP+ 40GbE Server NIC2.0

Chipset: ConnectX-3	Configuration: 2 x QSFP+ Port
Supported Ethernet Speeds: 40/10/1GbE	
Dimension: 167 x 69 mm(PCIe Board)	Product weight: 278 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual 1 x Neutral box	

PW7511

Product Updates
stay tuned

PCIe 3.0 (8 GT/s)

PCIe x4 ConnectX-3 Dual- SFP+ 10GbE Server NIC 2.0

Chipset: ConnectX-3	Configuration: 2 x SFP+ Port
Supported Ethernet Speeds: 10/1GbE	
Dimension: 167 x 69 mm(PCIe Board)	Product weight: 165 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual 1 x Neutral box	

PW7510

Product Updates
stay tuned

PCIe 3.0 (8 GT/s)

PCIe x8 ConnectX-3 Single-QSFP 40GbE Server NIC2.0

Chipset: ConnectX-3	Configuration: 1 x QSFP+ Port
Supported Ethernet Speeds: 40/10/1GbE	
Dimension: 167 x 69 mm(PCIe Board)	Product weight: 174.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual 1 x Neutral box	

PW7425

PCIe 3.0 (8 GT/s)

PCIe X8 QL41xx Dual- SFP+ 10G Converged Server NIC

Chipset: Marvell QLogic QL41xx	Configuration: 2 x SFP+ Port
Data Rate Supported: 10GbE	
Dimension: 165 x 69 mm(PCIe Board)	Product weight: 174.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual 1 x Neutral box	

PW7321

PCIe 3.0 (8 GT/s)

PCIe x8 BCM57810 Dual-SFP+ 10G Ethernet Server NIC

Chipset: Broadcom BCM57810	Configuration: 2 x SFP+ Port
Supported Link-Speeds: 10/1GbE	
Dimension: 165 x 68 mm(PCIe Board)	Product weight: 117.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual 1 x Neutral box	

PW7426

PCIe 3.0 (8 GT/s)

PCIe X8 QL41xx Quad-SFP+ 10G Converged Server NIC

Chipset: Marvell QLogic QL41xx	Configuration: 4 x SFP+ Port
Data Rate Supported: 10GbE	
Dimension: 165 x 69 mm(PCIe Board)	Product weight: 190.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual 1 x Neutral box	

PW7322

PCIe 3.0 (8 GT/s)

PCIe x8 BCM57840 Quad-SFP+ 10G Ethernet Server NIC

Chipset: Broadcom BCM57840	Configuration: 4 x SFP+ Port
Supported Link-Speeds: 10/1GbE	
Dimension: 165 x 68 mm(PCIe Board)	Product weight: 135 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual 1 x Neutral box	

PW7443




PCIe 3.0 (8 GT/s)

PCIe 3.0 X8 BCM57414 Dual- 25GbE SFP28 Server NIC

Chipset: Broadcom BCM57414 Configuration: 2 x SFP28 Port
Supported Link-Speeds: 25/10/1GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 123.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7519

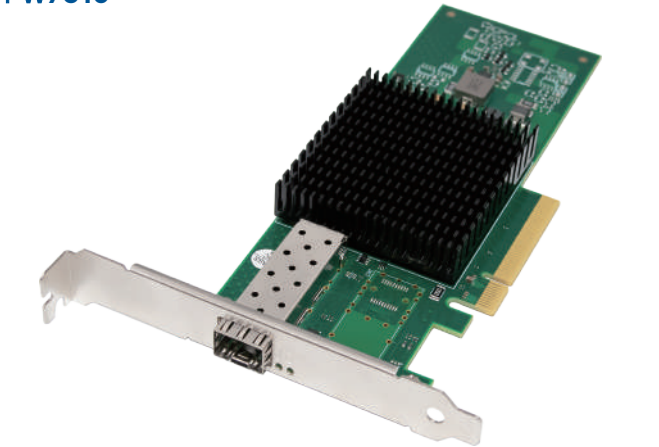


PCIe 3.0 (8 GT/s)

PCIe3.0 X8 BCM57412 Single-25GbE SFP28 Server NIC

Chipset: Broadcom BCM57412 Configuration: 1 x SFP28 Port
Supported Link-Speeds: 25/10GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 109 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7442

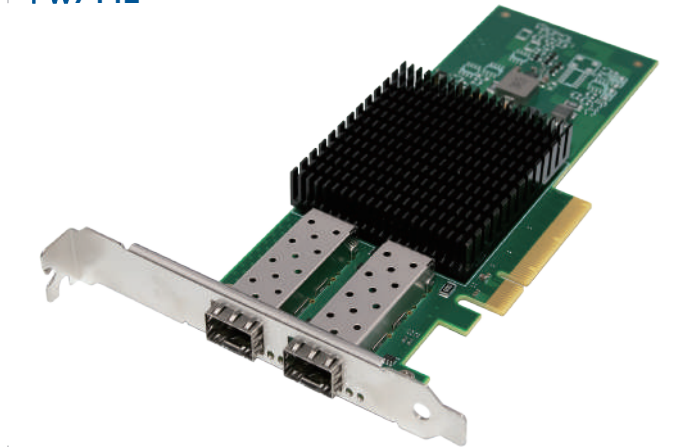


PCIe 3.0 (8 GT/s)

PCIe 3.0 X8 BCM57412 Dual- 10GbE SFP+ Server NIC

Chipset: Broadcom BCM57412 Configuration: 2 x SFP+ Port
Supported Link-Speeds: 10/1GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 123.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7477

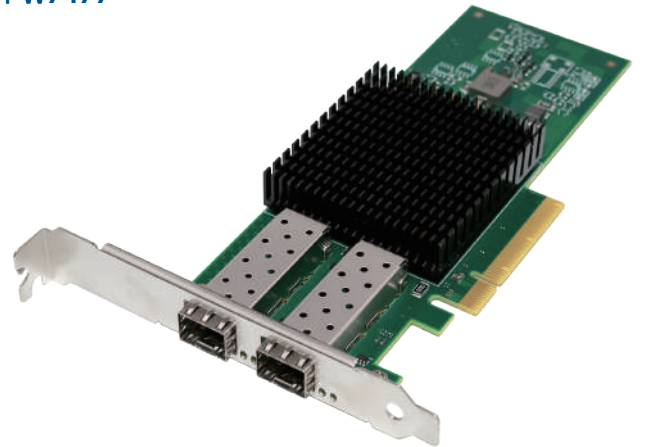


PCIe 3.0 (8 GT/s)

PCIe 3.0 X8 BCM57302 Dual- 10GbE SFP+ Server NIC

Chipset: Broadcom BCM57302 Configuration: 2 x SFP+ Port
Supported Link-Speeds: 10/1GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 123.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7445

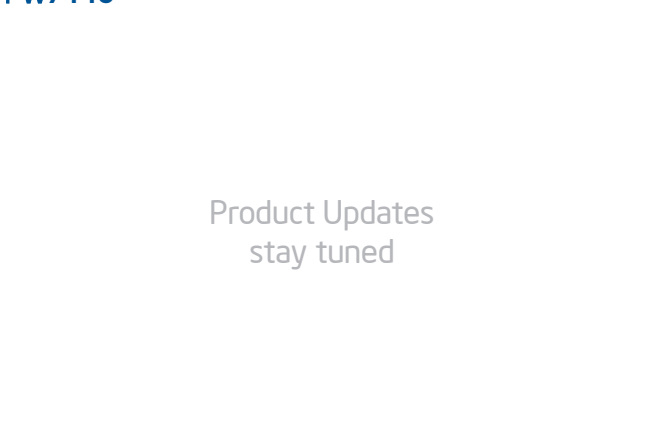


PCIe 4.0 (16 GT/s)

PCIe X16 57508 Dual- 100GbE QSFP28 Converged NIC

Chipset: Broadcom BCM57508 Configuration: 2 x QSFP28 Port
Supported Link-Speeds: 100/50/40/25/10GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 203.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7444

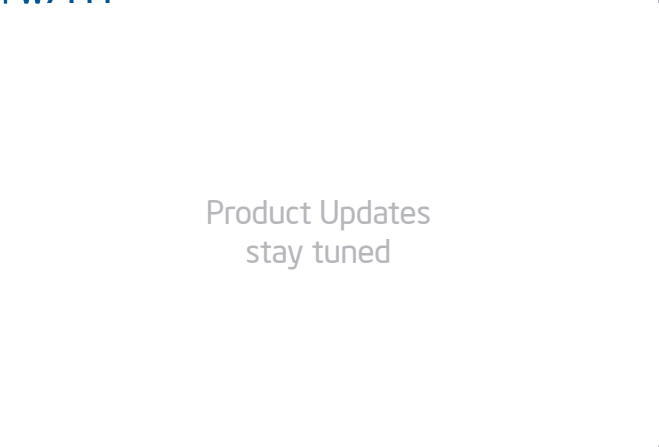

PCIe 4.0 (16 GT/s)

PCIe X16 BCM57504 Quad- 25GbE SFP28 Server NIC

Chipset: Broadcom BCM57504 Configuration: 2 x SFP28 Port
Supported Link-Speeds: 25/10GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 185 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW



PCIe 3.0 (8 GT/s)

PCIe

Chipset: Broadcom Configuration: 1 x QSFP28 Port
Data Rate Supported: 10/1GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 118.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW




PCIe 3.0 (8 GT/s)

PCIe

Chipset: Broadcom Configuration: 1 x QSFP28 Port
Data Rate Supported: 50/40/25/10GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 162.9 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7299

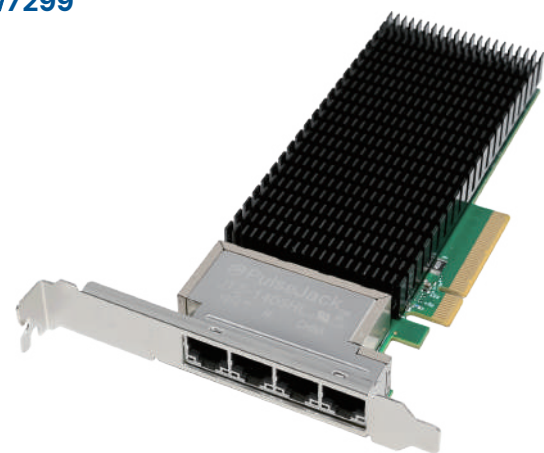

PCIe 3.0 (8 GT/s) V2.0

PCIe x8 X710T4 Quad-10G RJ45 Converged Server NIC

Chipset: Intel XL710-BM1 & X557 Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/5/2.5/1GbE, 100Mb
Dimension: 167 x 69 mm(PCIe Board) Product weight: 189.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7223




PCIe 3.0 (8 GT/s)

PCIe x8 X710T4 Quad-10G RJ45 Converged Server NIC

Chipset: Intel XL710-BM1 & X557 Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/5/2.5/1GbE, 100Mb
Dimension: 167 x 69 mm(PCIe Board) Product weight: 189.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7323

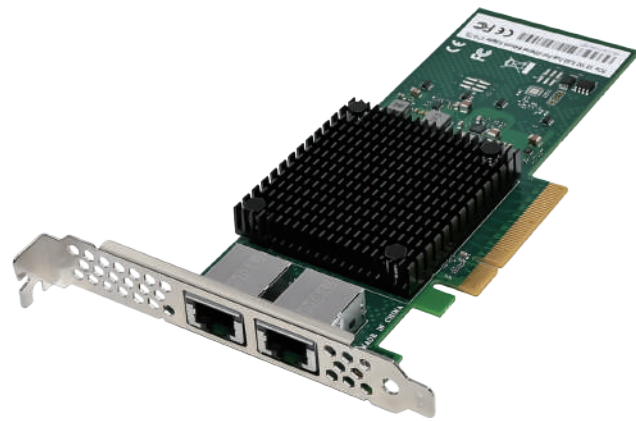

PCIe 3.0 (8 GT/s)

PCIe x8 X710T2L Dual-10G RJ45 Converged Server NIC

Chipset: Intel X710-AT2 Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/5/2.5/1GbE, 100Mb
Dimension: 167 x 69 mm(PCIe Board) Product weight: 111.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7449




PCIe 3.0 (8 GT/s)

PCIe x8 V710-T2 Dual- 5G RJ45 Converged Server NIC

Chipset: Intel V710-AT2 Configuration: 2 x RJ45 Port
Data Rate Per Port: 5/2.5/1GbE, 100Mb
Dimension: 167 x 69 mm(PCIe Board) Product weight: 110.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7368

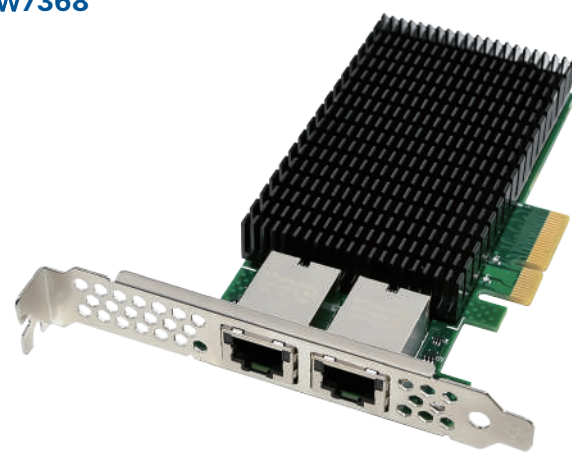


PCIe 3.0 (8 GT/s)

PCIe x4 X550-T2 Dual-10G RJ45 Converged Server NIC

Chipset: Intel X550-AT2 Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/5/2.5/1GbE, 100Mb
Dimension: 130 x 68 mm(PCIe Board) Product weight: 140.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7405

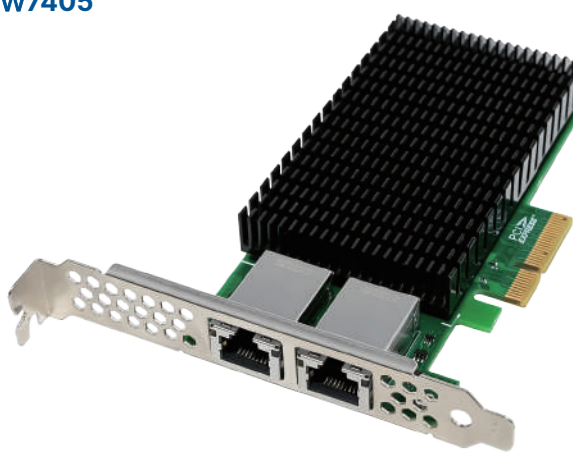


PCIe 3.0 (8 GT/s)

PCIe x4 X550-T2 Dual-10G RJ45 Converged Server NIC

Chipset: Intel X550-AT2 Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/5/2.5/1GbE, 100Mb
Dimension: 130 x 68 mm(PCIe Board) Product weight: 128.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7352

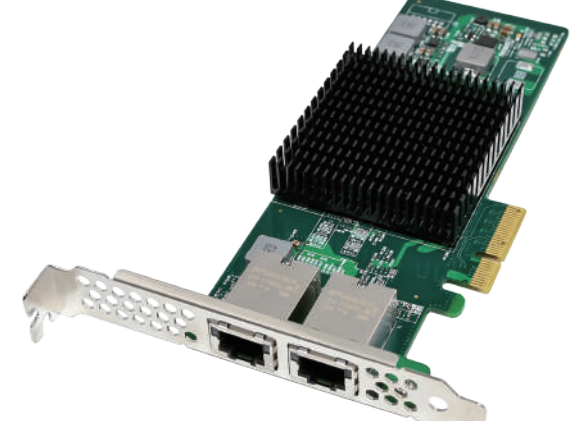

PCIe 3.0 (8 GT/s)

PCIe x4 X550-T2 Dual-10G RJ45 Converged Server NIC

Chipset: Intel X550-AT2 Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/5/2.5/1GbE, 100Mb
Dimension: 167 x 69 mm(PCIe Board) Product weight: 127 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7280



PCIe 3.0 (8 GT/s)

PCIe x8 X550-T2 Dual-10G RJ45 Converged Server NIC

Chipset: Intel X550-AT2 Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/5/2.5/1GbE, 100Mb
Dimension: 167 x 69 mm(PCIe Board) Product weight: 132 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7381



PCIe 3.0 (8 GT/s)

PCIe x4 X550T1 Single-10G RJ45 Converged Server NIC

Chipset: Intel X550-AT Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/5/2.5/1GbE, 100Mb
Dimension: 130 x 68 mm(PCIe Board) Product weight: 130.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7307



PCIe 3.0 (8 GT/s)

PCIe x8 X550T1 Single-10G RJ45 Converged Server NIC

Chipset: Intel X550-AT Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/5/2.5/1GbE, 100Mb
Dimension: 167 x 69 mm(PCIe Board) Product weight: 114.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7216



PCIe 3.0 (8 GT/s)

PCIe x4 X550T2 Dual-10G RJ45 Converged Server NIC

Chipset: Intel X550-AT2 Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/5/2.5/1GbE, 100Mb
Dimension: 153 x 69 mm(PCIe Board) Product weight: 137.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7217



PCIe 3.0 (8 GT/s)

PCIe x4 X550T1 Single-10G RJ45 Converged Server NIC

Chipset: Intel X550-AT Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/5/2.5/1GbE, 100Mb
Dimension: 153 x 69 mm(PCIe Board) Product weight: 130 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7319



PCIe 2.1 (5 GT/s)

PCIe x4 X540T2 Dual-10G RJ45 Converged Server NIC

Chipset: Intel X540-BT2 Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/1GbE, 100Mb
Dimension: 145 x 68 mm(PCIe Board) Product weight: 148 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7318



PCIe 2.1 (5 GT/s)

PCIe x8 X540T2 Dual-10G RJ45 Converged Server NIC

Chipset: Intel X540-BT2 Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/1GbE, 100Mb
Dimension: 145 x 68 mm(PCIe Board) Product weight: 149 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7214



PCIe 2.1 (5 GT/s)

PCIe x8 X540T2 Dual-10G RJ45 Converged Server NIC

Chipset: Intel X540-BT2 Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/1GbE, 100Mb
Dimension: 153 x 68 mm(PCIe Board) Product weight: 173 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7253



PCIe 2.1 (5 GT/s)

PCIe x8 X540T2 Dual-10G RJ45 Converged Server NIC

Chipset: Intel X540-BT2 Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/1GbE, 100Mb
Dimension: 153 x 68 mm(PCIe Board) Product weight: 135g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7215



PCIe 2.1 (5 GT/s) V2.0

PCIe x8 X540T1 Single-10G RJ45 Converged Server NIC

Chipset: Intel X540-BT Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/1GbE, 100Mb
Dimension: 153 x 68 mm(PCIe Board) Product weight: 160.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7213



PCIe 2.0 (5 GT/s)

PCIe x8 X520T1 Single-10G RJ45 Converged Server NIC

Chipset: Intel JL82599EN Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/1GbE, 100Mb
Dimension: 145 x 69 mm(PCIe Board) Product weight: 106.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7409



PCIe 2.0 (5 GT/s)

PCIe x4 X520T1 Single-10G RJ45 Converged Server NIC

Chipset: Intel JL82599EN Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/1GbE, 100Mb
Dimension: 155 x 69 mm(PCIe Board) Product weight: 106.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7450



PCIe 2.0 (5 GT/s)

PCIe x4 X520T1 Single-10G RJ45 Converged Server NIC

Chipset: Intel JL82599EN Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/5/2.5/1GbE, 100Mb
Dimension: 140 x 68 mm(PCIe Board) Product weight: 168.9 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7309



PCIe 3.1 (5 GT/s)

PCIe3.1 X4 I225T4 Quad-RJ45 2.5G Ethernet Server NIC

Chipset: Intel I225 + Configuration: 4 x RJ45 Port
Data Rate Per Port: 2.5/1GbE/100/10Mbps
Dimension: 130 x 68 mm(PCIe Board) Product weight: 140.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7421




PCIe 3.1 (5 GT/s)

PCIe3.1 X4 I225T4 Quad-RJ45 2.5G Ethernet Server NIC

Chipset: Intel I225 + Configuration: 4 x RJ45 Port
Data Rate Per Port: 2.5/1GbE/100/10Mbps
Dimension: 130 x 68 mm(PCIe Board) Product weight: 128.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7207

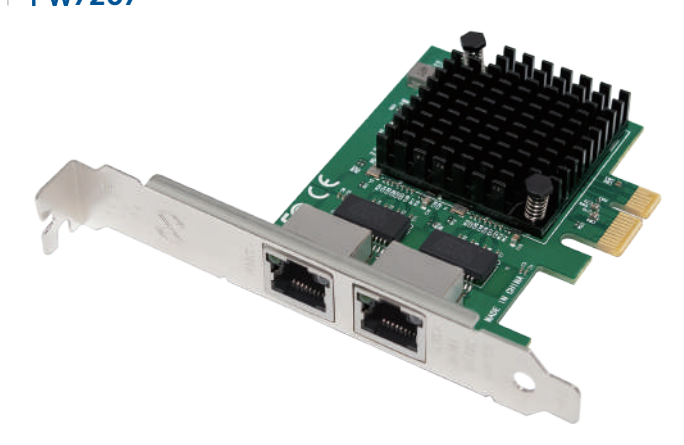


PCIe 3.1 (5 GT/s)

PCIe3.1 X1 I225T2 Dual- RJ45 2.5G Ethernet Server NIC

Chipset: Intel I225 + ASM1187 Configuration: 2 x RJ45 Port
Data Rate Per Port: 2.5/1GbE/100/10Mbps
Dimension: 82 x 66 mm(PCIe Board) Product weight: 60.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7258

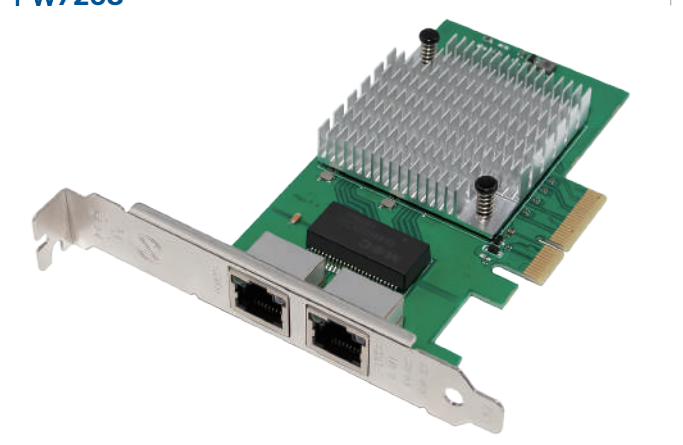


PCIe 3.1 (5 GT/s)

PCIe3.1 X4 I225T2 Dual-RJ45 2.5G Ethernet Server NIC

Chipset: Intel I225 + PI7C9X2G608P Configuration: 2 x RJ45 Port
Data Rate Per Port: 2.5/1GbE/100/10Mbps
Dimension: 116 x 69 mm(PCIe Board) Product weight: 80.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7265

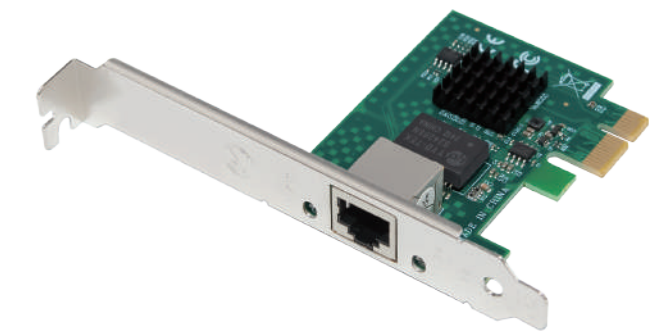


PCIe 3.1 (5 GT/s)

PCIe3.1 X1 I225T1 Single-RJ45 2.5G Ethernet Server NIC

Chipset: Intel I225-V Configuration: 1 x RJ45 Port
Data Rate Per Port: 2.5/1GbE/100/10Mbps
Dimension: 72 x 55 mm(PCIe Board) Product weight: 37.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7486

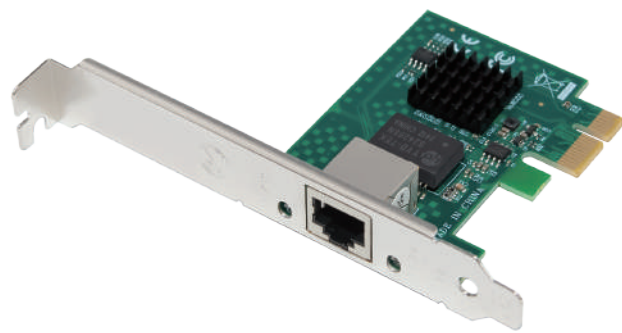


PCIe 3.1 (5 GT/s)

PCIe3.1 X1 I226T1 Single-RJ45 2.5G Ethernet Server NIC

Chipset: Intel I226-V Configuration: 1 x RJ45 Port
Data Rate Per Port: 2.5/1GbE/100/10Mbps
Dimension: 72 x 55 mm(PCIe Board) Product weight: 37.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7470

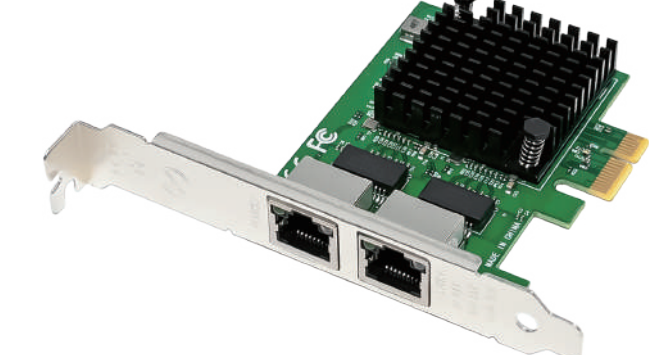

PCIe 3.1 (5 GT/s)

PCIe 3.1 X1 I226T2 Dual-RJ45 2.5G Ethernet Server NIC

Chipset: Intel I226 + ASM1187 Configuration: 2 x RJ45 Port
Data Rate Per Port: 2.5/1GbE/100/10Mbps
Dimension: 83 x 67 mm(PCIe Board) Product weight: 60.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7419




PCIe 3.1 (5 GT/s)

PCIe 3.1 X4 I226T4 Quad-RJ45 2.5G Ethernet Server NIC

Chipset: Intel I226 + PI7C9X2G608P Configuration: 4 x RJ45 Port
Data Rate Per Port: 2.5/1GbE/100/10Mbps
Dimension: 140 x 68 mm(PCIe Board) Product weight: 159.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7418

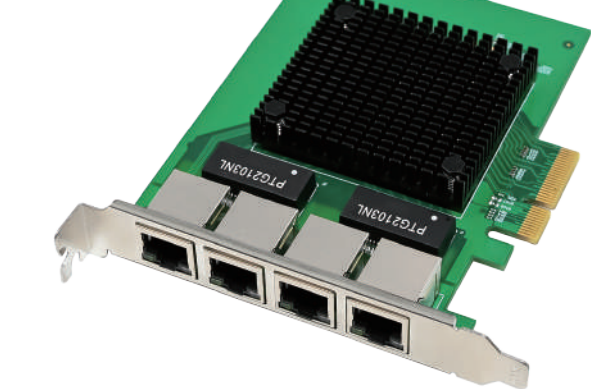

PCIe 2.1 (5 GT/s)

PCIe x4 I350T4 Quad-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM4 Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 126 x 100 mm(PCIe Board) Product weight: 125.4 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Neutral box

PW7373



PCIe 2.1 (5 GT/s)

PCIe x4 I350T8 Eight-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM4*2 Configuration: 8 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 132 x 98 mm(PCIe Board) Product weight: 263.3 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Neutral box

PW7376




PCIe 2.1 (5 GT/s)

PCIe x4 I350-T6 Six- RJ45 Gigabit Ethernet Server NIC

Chipset: Intel I350AM4 & I350AM2 Configuration: 6 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 132 x 98 mm(PCIe Board) Product weight: 244.8 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Neutral box

PW7462

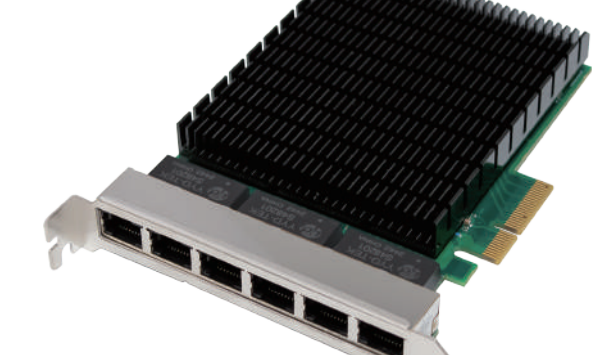

PCIe 2.1 (5 GT/s)

PCIe x4 I350-T6 Six- RJ45 Gigabit Ethernet Server NIC

Chipset: Intel I350AM4 & I350AM2 Configuration: 6 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 132 x 98 mm(PCIe Board) Product weight: 213.4 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Neutral box

PW7420



PCIe 2.1 (5 GT/s)

PCIe x4 I350T4 Quad- RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM4 Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 135 x 69 mm(PCIe Board) Product weight: 104.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7308



PCIe 2.1 (5 GT/s)

PCIe x4 I350T4V2 Quad-RJ45 1Gb Ethernet Server NIC

Chipset: Intel NHI350AM2*2 Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 155 x 69 mm(PCIe Board) Product weight: 125 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7238



PCIe 2.1 (5 GT/s)

PCIe x4 I350T4 Quad-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM4 Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 130 x 69 mm(PCIe Board) Product weight: 84 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7233



PCIe 2.1 (5 GT/s)

PCIe x1 I350T4 Quad-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM4 Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 130 x 69 mm(PCIe Board) Product weight: 83 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW724




PCIe 2.1 (5 GT/s)

PCIe x4 I350T4 Quad-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM4 Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 100 x 69 mm(PCIe Board) Product weight: 84 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7234

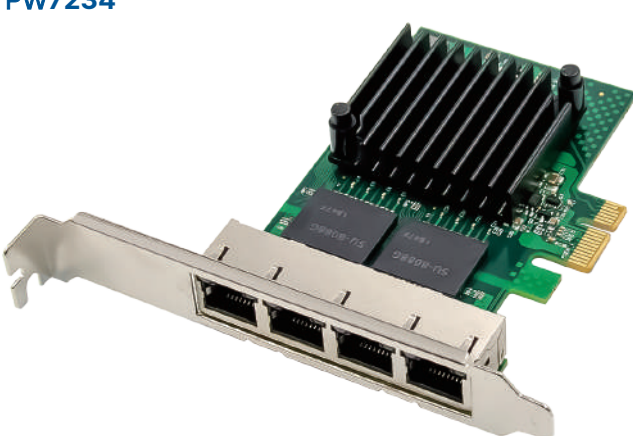


PCIe 2.1 (5 GT/s)

PCIe x4 I350T4 Quad-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM4 Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 100 x 68 mm(PCIe Board) Product weight: 83 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7232

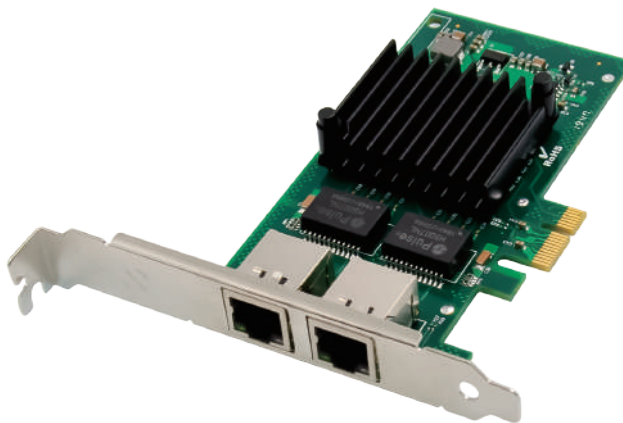

PCIe 2.1 (5 GT/s)

PCIe x1 I350T2 Dual- RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM2 Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 118 x 69 mm(PCIe Board) Product weight: 83.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW727



PCIe 2.1 (5 GT/s)

PCIe x1 I350T2 Dual- RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM2 Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 118 x 69 mm(PCIe Board) Product weight: 84.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7255



PCIe 2.1 (2.5GT/s)

PCIe x4 I210-T2 Dual-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel WGI210AT+PEX8606 Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 123 x 68 mm(PCIe Board) Product weight: 97.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7372



PCIe 2.1 (2.5GT/s)

PCIe x4 I210T4 Quad-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel WGI210AT+ Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 145 x 99 mm(PCIe Board) Product weight: 192.7 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Neutral box

PW7408



PCIe 2.1 (2.5GT/s)

PCIe x4 I210T4 Quad-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel I210AT+PI7C9X2G608P Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 149 x 68 mm(PCIe Board) Product weight: 172.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7385



PCIe 2.1 (2.5GT/s)

PCIe x4 I210T4 Quad-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel WGI210AT+PEX8747 Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 149 x 68 mm(PCIe Board) Product weight: 172.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7252



PCIe 2.1 (2.5GT/s)

PCIe x1 I210T1 Single-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel WGI210AT Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 65 x 55 mm(PCIe Board) Product weight: 36.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW729



PCIe 2.1 (2.5GT/s)

PCIe x1 I210T1 Single-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel WGI210AT Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 93 x 55 mm(PCIe Board) Product weight: 41.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7224



PCIe 2.1 (2.5GT/s)

PCIe x1 I211T1 Single-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel WGI211AT Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 80 x 43 mm(PCIe Board) Product weight: 32.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7204



PCIe 2.1 (2.5GT/s)

PCIe x1 I210T1 Single-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel WGI210AT Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 80 x 43 mm(PCIe Board) Product weight: 32.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

ST7259



PCIe 2.0 (5 GT/s)

PCIe x1 I340-T2 Dual-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NH82580DB Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 130 x 69 mm(PCIe Board) Product weight: 85.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

ST7422



PCIe 2.0 (5 GT/s)

PCIe x4 I340T4 Quad-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NH82580EB Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 135 x 69 mm(PCIe Board) Product weight: 119.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

ST7260



PCIe 2.0 (5 GT/s)

PCIe x4 I340T4 Quad-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NH82580EB Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 130 x 69 mm(PCIe Board) Product weight: 84 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

ST7270



PCIe 2.0 (5 GT/s)

PCIe x4 I340T4 Quad-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NH82580EB Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 130 x 69 mm(PCIe Board) Product weight: 83 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

ST726



PCIe 2.0 (2.5 GT/s)

PCIe x4 82576 Dual- RJ45 Gigabit Ethernet Server NIC

Chipset: Intel JL82576EB Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 113 x 69 mm(PCIe Board) Product weight: 79 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

ST7239



PCIe 2.0 (2.5 GT/s)

PCIe x1 82576 Dual- RJ45 Gigabit Ethernet Server NIC

Chipset: Intel JL82576EB Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 113 x 69 mm(PCIe Board) Product weight: 74 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

ST7455



PCIe 2.1 (2.5GT/s)

PCIe x4 I211-T4 Dual- RJ45 Gigabit Ethernet Server NIC

Chipset: Intel I211AT+PI7C9X2G608P Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 149 x 68 mm(PCIe Board) Product weight: 172.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

ST7229




PCIe 2.0 (2.5 GT/s)

PCIe x1 82576 Quad- RJ45 Gigabit Ethernet Server NIC

Chipset: Intel JL82576EB*2 Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 158 x 69 mm(PCIe Board) Product weight: 142 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW725

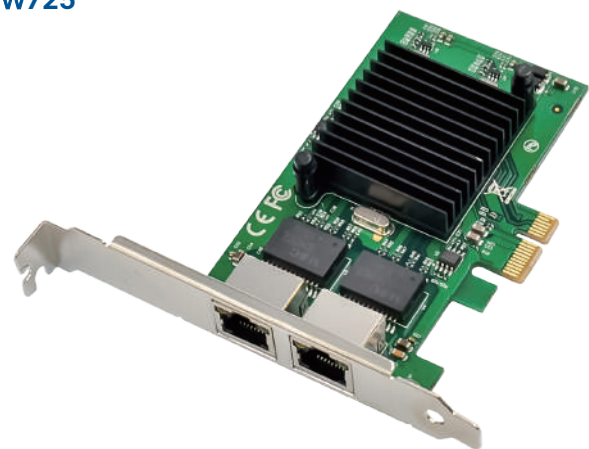

PCIe 2.0 (2.5 GT/s)

PCIe x1 82575 Dual- RJ45 Gigabit Ethernet Server NIC

Chipset: Intel JL82575EB Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 105 x 68 mm(PCIe Board) Product weight: 74 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7291




PCIe 2.0 (2.5 GT/s)

PCIe x1 82575 Quad- RJ45 Gigabit Ethernet Server NIC

Chipset: Intel JL82575EB*2 Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 158 x 69 mm(PCIe Board) Product weight: 142 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7279

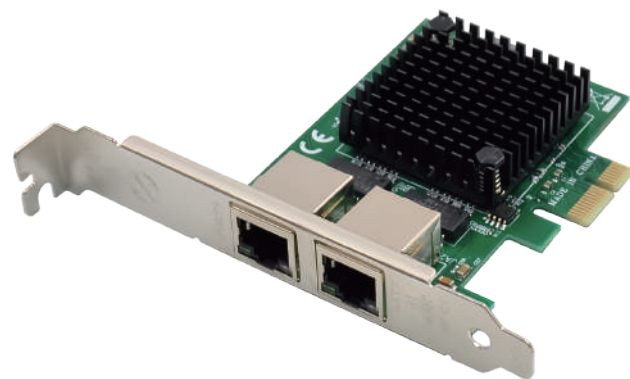

PCIe 1.0a (2.5 GT/s)

PCIe x1 82571 Dual- RJ45 Gigabit Ethernet Server NIC

Chipset: Intel JL82571GB Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 86 x 68 mm(PCIe Board) Product weight: 65.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7297




PCIe 1.0a (2.5 GT/s)

PCIe x1 82571 Quad- RJ45 Gigabit Ethernet Server NIC

Chipset: Intel JL82571GB*2 Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 132 x 68 mm(PCIe Board) Product weight: 106.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7416

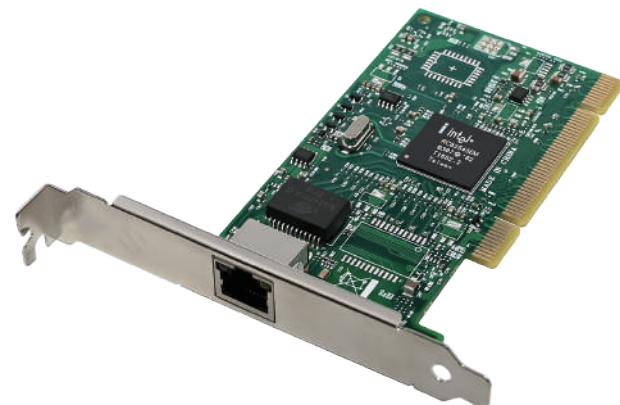


PCI 2.0 (2.5 GT/s)

PCI 82545EM Single-RJ45 Copper Gigabit Ethernet NIC

Chipset: Intel RC82545EM Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 120 x 63 mm(PCI Board) Product weight: 53.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7250

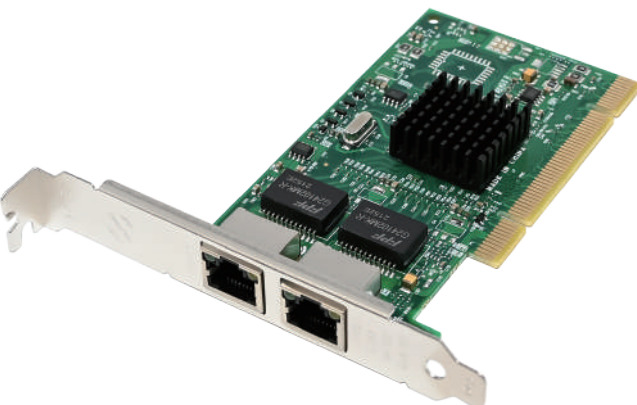


PCI 2.0 (2.5 GT/s)

PCI 82546GM Dual- RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NH82546GB Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 130 x 65 mm(PCI Board) Product weight: 62.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7230

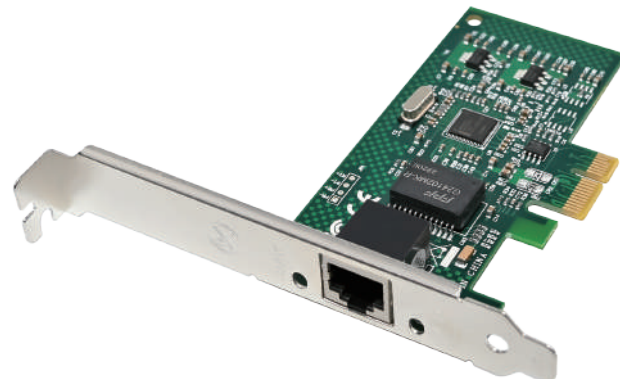


PCIe 1.1 (2.5 GT/s)

PCIe x1 82583 Single-RJ45 Copper Gigabit Ethernet NIC

Chipset: Intel WG82583V Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 103 x 56 mm(PCIe Board) Product weight: 40.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7210

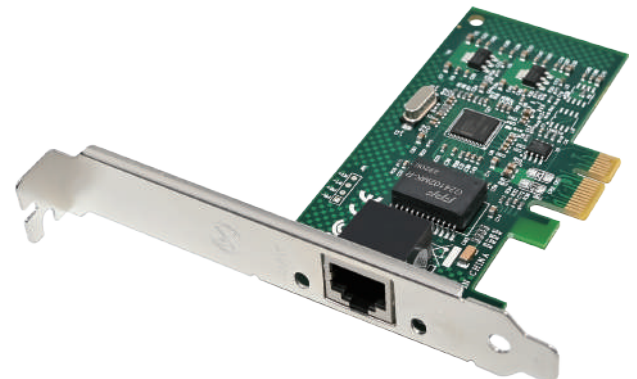


PCIe 1.1 (2.5 GT/s)

PCIe x1 82574 Single-RJ45 Copper Gigabit Ethernet NIC

Chipset: Intel WG82574L Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 103 x 56 mm(PCIe Board) Product weight: 40.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7472

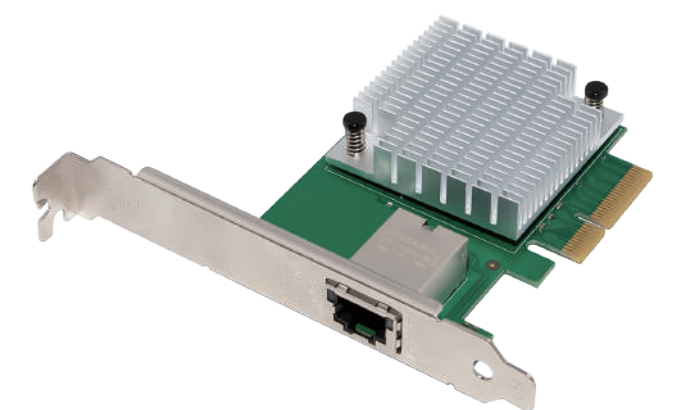


PCIe 4.0 (16 GT/s) V2.0

PCIe X4 AQC113 Single- RJ45 10G Ethernet Server NIC

Chipset: Marvell AQC113 Configuration: 1 x RJ45 Port
Network rate: 10G/5G/2.5G/1G/100M/10M
Dimension: 90 x 67 mm(PCle Board) Product weight: 80.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7473

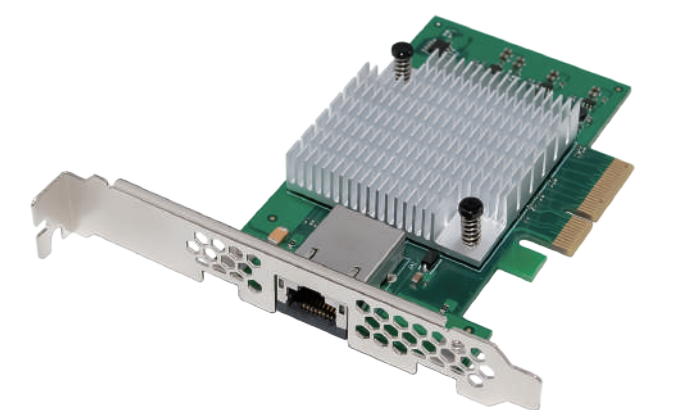


PCIe 4.0 (16 GT/s)

PCIe X4 AQC113 Single- RJ45 10G Ethernet Server NIC

Chipset: Marvell AQC113 Configuration: 1 x RJ45 Port
Network rate: 10G/5G/2.5G/1G/100M/10M
Dimension: 105 x 68 mm(PCle Board) Product weight: 77.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7356

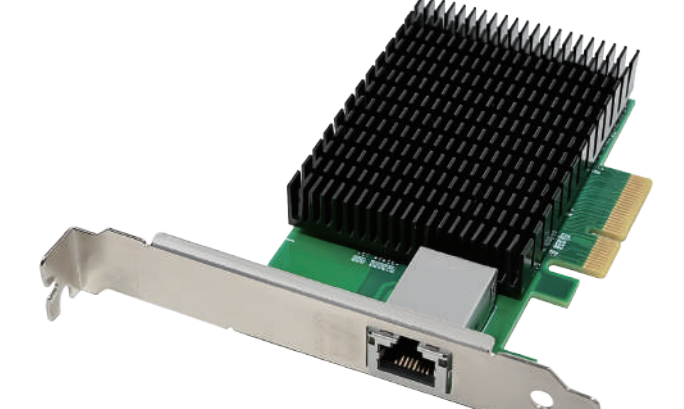


PCIe 3.0 (8 GT/s)

PCIe X4 AQC107S Single-RJ45 10G Ethernet Server NIC

Chipset: Marvell AQC107S Configuration: 1 x RJ45 Port
Network rate: 10G/5G/2.5G/1G/100M
Dimension: 105 x 68 mm(PCle Board) Product weight: 114.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7375

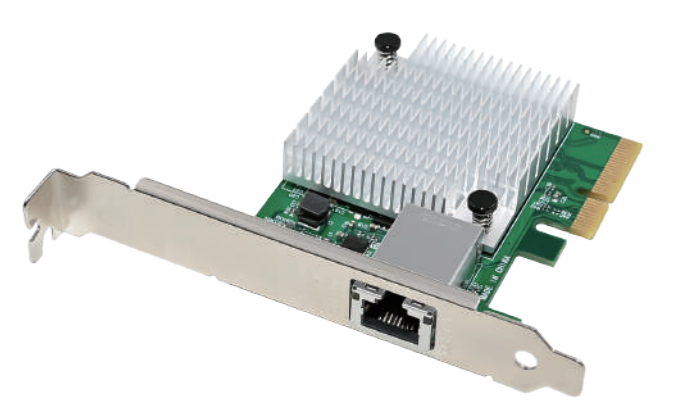


PCIe 3.0 (8 GT/s)

PCIe X4 AQC113C Single-RJ45 10G Ethernet Server NIC

Chipset: Marvell AQC113C Configuration: 1 x RJ45 Port
Network rate: 10G/5G/2.5G/1G/100M/10M
Dimension: 79 x 68 mm(PCle Board) Product weight: 75 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7357

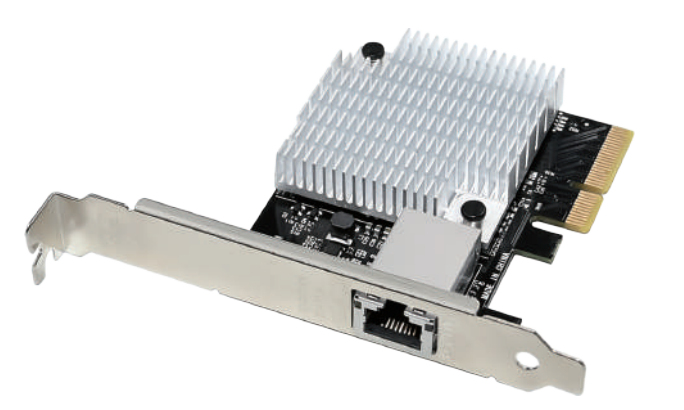


PCIe 3.0 (8 GT/s)

PCIe X4 AQC107S Single-RJ45 10G Ethernet Server NIC

Chipset: Marvell AQC107S Configuration: 1 x RJ45 Port
Network rate: 10G/5G/2.5G/1G/100M
Dimension: 79 x 68 mm(PCle Board) Product weight: 76.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7358

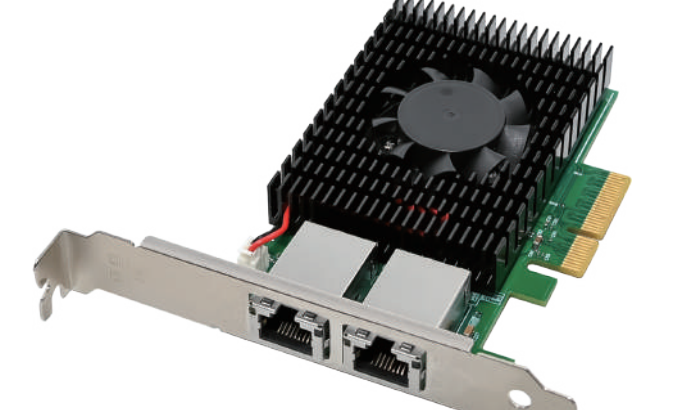


PCIe 3.0 (8 GT/s)

PCIe X4 AQC107S Dual- RJ45 10G Ethernet Server NIC

Chipset: Marvell AQC107S+ Configuration: 2 x RJ45 Port
Network rate: 10G/5G/2.5G/1G/100M
Dimension: 107 x 69 mm(PCle Board) Product weight: 126 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7406

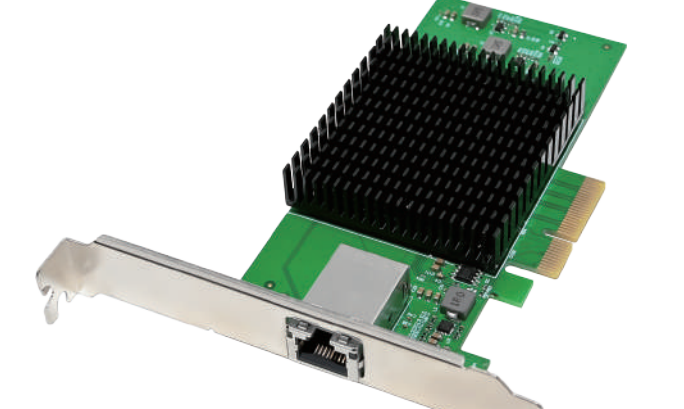

PCIe 3.0 (8 GT/s) WOL

PCIe X4 AQC107 Single- RJ45 10G Ethernet Server NIC

Chipset: Marvell AQC107 Configuration: 1 x RJ45 Port
Network rate: 10G/5G/2.5G/1G/100M
Dimension: 132 x 69 mm(PCle Board) Product weight: 100.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7267




PCIe 3.0 (8 GT/s)

PCIe X4 AQC107 Single- RJ45 10G Ethernet Server NIC

Chipset: Marvell AQC107 Configuration: 1 x RJ45 Port
Network rate: 10G/5G/2.5G/1G/100M
Dimension: 132 x 68 mm(PCle Board) Product weight: 75.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7504

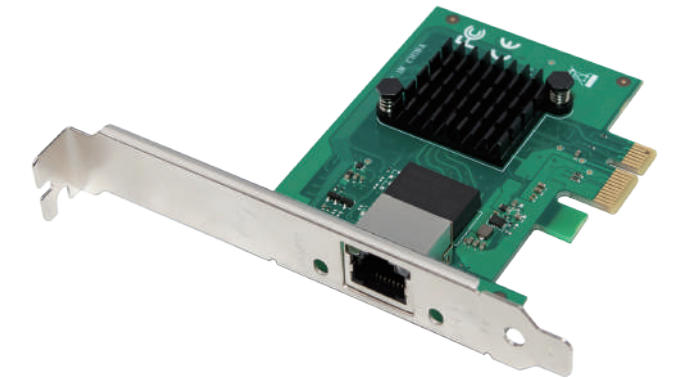


PCIe 3.0 (5 GT/s) V2.0

PCIe X1 AQC114 Single- RJ45 5G Ethernet Server NIC

Chipset: Marvell AQC114 Configuration: 1 x RJ45 Port
Network rate: 5G/2.5G/1G/100M/10M
Dimension: 83 x 65 mm(PCIe Board) Product weight: 49.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7505

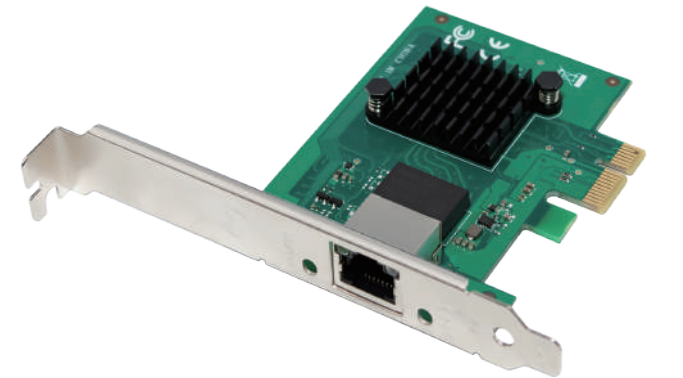


PCIe 3.0 (5 GT/s)

PCIe X1 AQC115 Single- RJ45 2.5G Ethernet Server NIC

Chipset: Marvell AQC115 Configuration: 1 x RJ45 Port
Network rate: 2.5G/1G/100M/10M
Dimension: 83 x 65 mm(PCIe Board) Product weight: 49.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7488

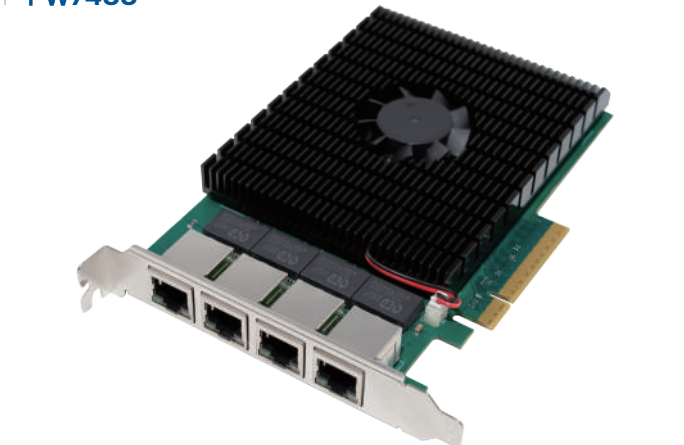


PCIe 4.0 (16 GT/s)

PCIe X4 AQC113 Quad- RJ45 10G Ethernet Server NIC

Chipset: Marvell AQC113+ Configuration: 4 x RJ45 Port
Network rate: 10G/5G/2.5G/1G/100M/10M
Dimension: 156 x 104 mm(PCIe Board) Product weight: 264.5 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Neutral box

PW

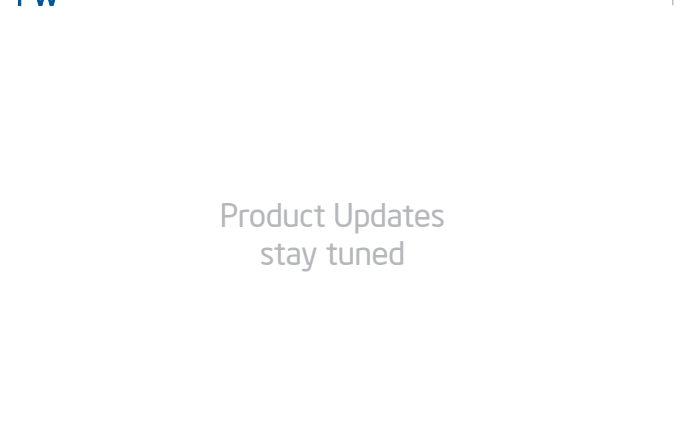

PCIe 4.0 (16 GT/s)

PCIe X4 AQC113 Dual- RJ45 10G Ethernet Server NIC

Chipset: Marvell AQC113+ Configuration: 2 x RJ45 Port
Network rate: 10G/5G/2.5G/1G/100M/10M
Dimension: 167 x 69 mm(PCIe Board) Product weight: 110.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7209



PCIe 2.0 (5 GT/s)

PCIe x1 BCM5719 Quad- RJ45 1Gb Ethernet Server NIC

Chipset: Broadcom BCM5719 Configuration: 4 x RJ45 Port
Link-Speeds: 1GbE/100Mb/10Mb
Dimension: 118 x 69 mm(PCIe Board) Product weight: 83 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7208




PCIe 2.0 (5 GT/s)

PCIe x4 BCM5719 Quad- RJ45 1Gb Ethernet Server NIC

Chipset: Broadcom BCM5719 Configuration: 4 x RJ45 Port
Link-Speeds: 1GbE/100Mb/10Mb
Dimension: 118 x 69 mm(PCIe Board) Product weight: 85 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7446

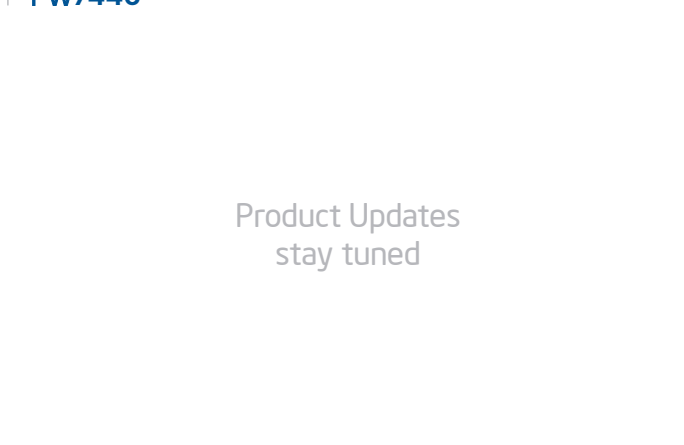

PCIe 3.0 (8 GT/s)

PCIe x8 BCM57416 Dual-RJ45 10G Ethernet Server NIC

Chipset: Broadcom BCM57416 Configuration: 2 x RJ45 Port
Link-Speeds: 10/1GbE
Dimension: 167 x 69 mm(PCIe Board) Product weight: 127 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7484



PCIe 2.0 (5 GT/s) V2.0

PCIe x4 BCM5719 Quad- RJ45 1Gb Ethernet Server NIC

Chipset: Broadcom BCM5719 Configuration: 4 x RJ45 Port
Link-Speeds: 1GbE/100Mb/10Mb
Dimension: 118 x 69 mm(PCIe Board) Product weight: 95 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7284



PCIe 2.0 (2.5 GT/s)

PCIe x1 BCM5718 Dual- RJ45 1Gb Ethernet Server NIC

Chipset: Broadcom BCM5718 Configuration: 2 x RJ45 Port
Link-Speeds: 1GbE/100Mb/10Mb
Dimension: 75 x 68 mm(PCIe Board) Product weight: 49.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7287



PCIe 2.1 (2.5 GT/s)

PCIe x1 BCM5720 Dual- RJ45 1Gb Ethernet Server NIC

Chipset: Broadcom BCM5720 Configuration: 2 x RJ45 Port
Link-Speeds: 1GbE/100Mb/10Mb
Dimension: 85 x 68 mm(PCIe Board) Product weight: 51.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7289



PCIe 1.1 (2.5 GT/s)

PCIe x1 BCM5721 Single-RJ45 1Gb Ethernet Server NIC

Chipset: Broadcom BCM5721 Configuration: 1 x RJ45 Port
Link-Speeds: 1GbE/100Mb/10Mb
Dimension: 82 x 55 mm(PCIe Board) Product weight: 45.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7292




PCIe 1.1 (2.5 GT/s)

PCIe x1 BCM5751 Single-RJ45 1Gb Ethernet Server NIC

Chipset: Broadcom BCM5751 Configuration: 1 x RJ45 Port
Link-Speeds: 1GbE/100Mb/10Mb
Dimension: 82 x 55 mm(PCIe Board) Product weight: 45.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7454

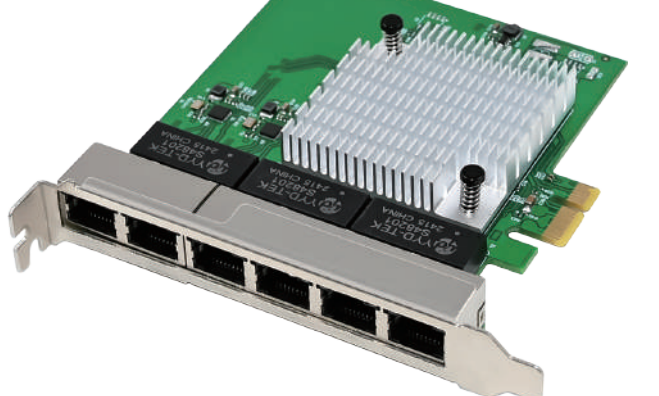


PCIe 1.1 (2.5 GT/s)

PCIe x1 8111H Six-RJ45 Gigabit Ethernet Network Card

Chipset: Realtek RTL8111H+ Configuration: 6 x RJ45 Port
Transmission Rate: 1000/100/10Mbps
Dimension: 110 x 98 mm(PCIe Board) Product weight: 117.8 g
Accessories: 1 x CD-Driver, 1 x Antistatic bag, 1 x Neutral box

PW7447

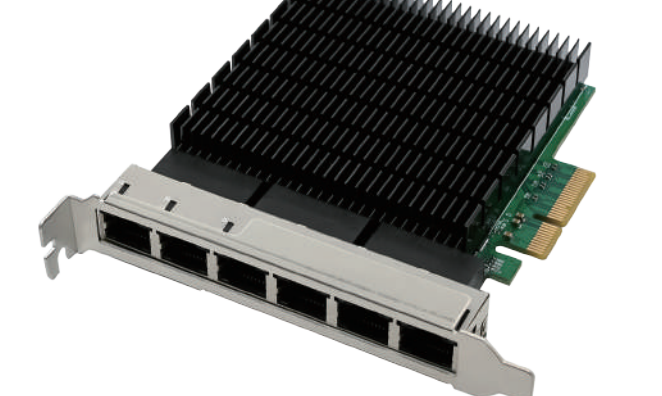

PCIe 2.1 (5 GT/s)

PCIe x4 RTL8125BG Six-RJ45 2.5G Ethernet Server NIC

Chipset: Realtek RTL8125BG+ Configuration: 6 x RJ45 Port
Transmission Rate: 2.5Gbps/1000/100/10Mbps
Dimension: 110 x 98 mm(PCIe Board) Product weight: 194.7 g
Accessories: 1 x CD-Driver, 1 x Antistatic bag, 1 x Neutral box

PW7424



PCIe 2.1 (5 GT/s)

PCIe x4 8125BG Quad- RJ45 2.5G Ethernet Server NIC

Chipset: Realtek RTL8125BG+ Configuration: 4 x RJ45 Port
Transmission Rate: 2.5Gbps/1000/100/10Mbps
Dimension: 123 x 69 mm(PCIe Board) Product weight: 108.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Antistatic bag
1 x Neutral box

PW7487




PCIe 2.1 (5 GT/s)

PCIe x4 8125BG Quad- RJ45 2.5G Ethernet Server NIC

Chipset: RTL8125BG + PEX8608 Configuration: 4 x RJ45 Port
Transmission Rate: 2.5Gbps/1000/100/10Mbps
Dimension: 130 x 69 mm(PCIe Board) Product weight: 140.9 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Antistatic bag
1 x Neutral box

PW7276

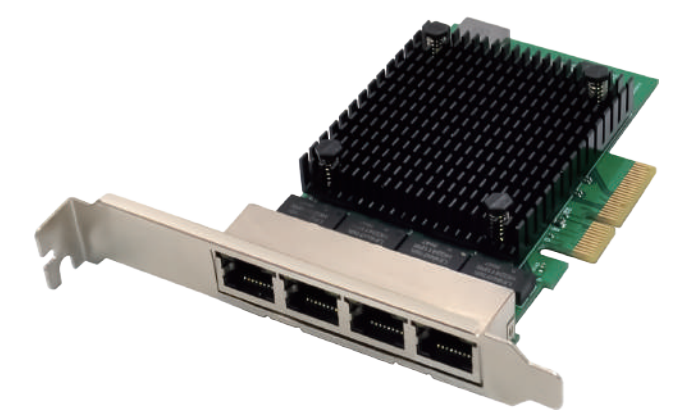


PCIe 2.1 (5 GT/s)

PCIe x4 8125BG Quad- RJ45 2.5G Ethernet Server NIC

Chipset: RTL8125BG + ASM1806 Configuration: 4 x RJ45 Port
Transmission Rate: 2.5Gbps/1000/100/10Mbps
Dimension: 108 x 69 mm(PCIe Board) Product weight: 101 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Antistatic bag
1 x Neutral box

PW7275

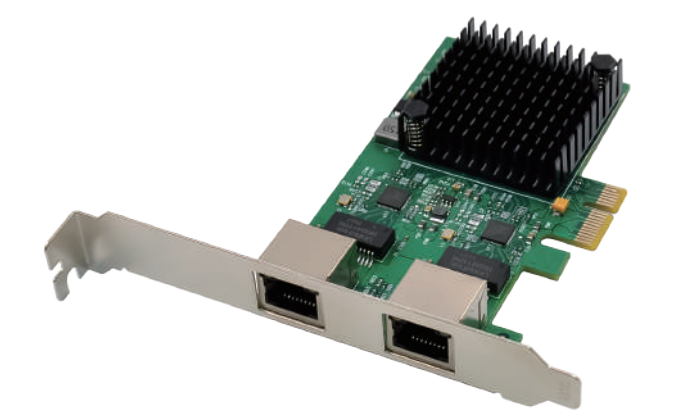

PCIe 2.1 (5 GT/s)

PCIe x4 8125BG Dual- RJ45 2.5G Ethernet Server NIC

Chipset: RTL8125BG + ASM1806 Configuration: 2 x RJ45 Port
Transmission Rate: 2.5Gbps/1000/100/10Mbps
Dimension: 100 x 62 mm(PCIe Board) Product weight: 60 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Antistatic bag
1 x Neutral box

PW7266




PCIe 2.1 (5 GT/s)

PCIe x1 8125BG Single- RJ45 2.5G Ethernet Server NIC

Chipset: Realtek RTL8125BG Configuration: 1 x RJ45 Port
Transmission Rate: 2.5Gbps/1000/100/10Mbps
Dimension: 70 x 56 mm(PCIe Board) Product weight: 39 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Antistatic bag
1 x Neutral box

PW7469

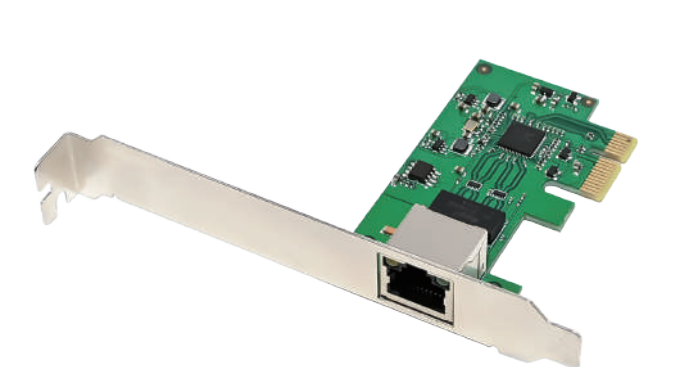


PCIe 2.1 (5 GT/s)

PCIe x1 RTL8126 Single- RJ45 5G Ethernet Server NIC

Chipset: Realtek RTL8126 Configuration: 1 x RJ45 Port
Transmission Rate: 5Gbps/2.5Gbps/1000/100/10Mbps
Dimension: 72 x 42 mm(PCIe Board) Product weight: 30 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Antistatic bag
1 x Neutral box

PW7387

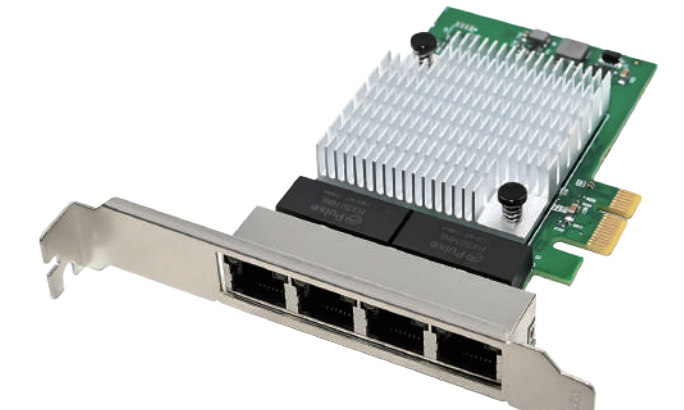


PCIe 1.1 (2.5 GT/s)

PCIe x1 8111H Quad-RJ45 Gigabit Ethernet Network Card

Chipset: RTL8111H + ASM1187 Configuration: 4 x RJ45 Port
Transmission Rate: 1000/100/10Mbps
Dimension: 110 x 69 mm(PCIe Board) Product weight: 94.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Antistatic bag
1 x Neutral box

PW7414

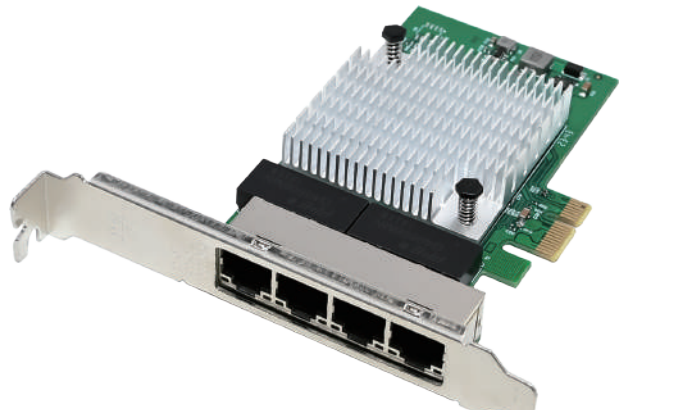


PCIe 1.1 (2.5 GT/s)

PCIe x1 8111H Quad-RJ45 Gigabit Ethernet Network Card

Chipset: RTL8111H + ASM1187 Configuration: 4 x RJ45 Port
Transmission Rate: 1000/100/10Mbps
Dimension: 110 x 69 mm(PCIe Board) Product weight: 95.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Antistatic bag
1 x Neutral box

PW7440

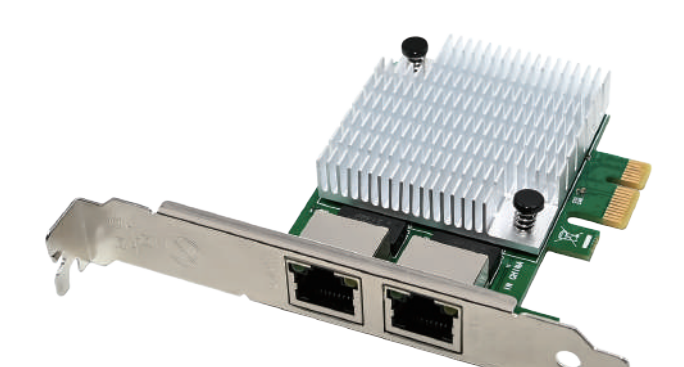


PCIe 1.1 (2.5 GT/s)

PCIe x1 8111H Dual-RJ45 Gigabit Ethernet Network Card

Chipset: RTL8111H + ASM1187 Configuration: 2 x RJ45 Port
Transmission Rate: 1000/100/10Mbps
Dimension: 76 x 65 mm(PCIe Board) Product weight: 72.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Antistatic bag
1 x Neutral box

PW7377

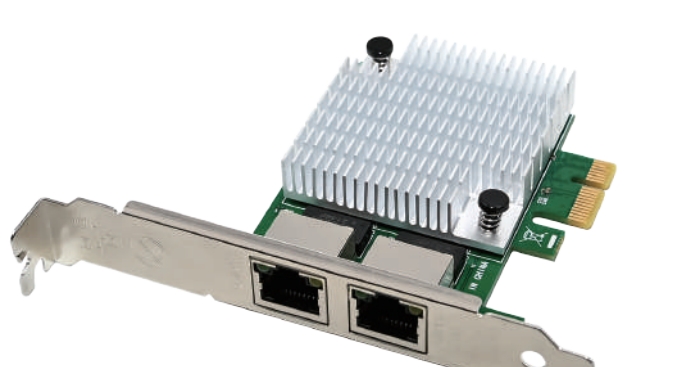


PCIe 1.1 (2.5 GT/s)

PCIe x1 8111F Dual-RJ45 Gigabit Ethernet Network Card

Chipset: RTL8111F + ASM1187 Configuration: 2 x RJ45 Port
Transmission Rate: 1000/100/10Mbps
Dimension: 76 x 65 mm(PCIe Board) Product weight: 72.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Antistatic bag
1 x Neutral box

PW7244

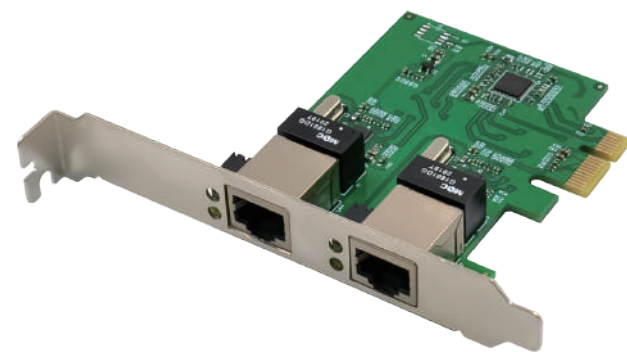

PCIe 1.1 (2.5 GT/s)

PCIe x1 8111H Dual-RJ45 Gigabit Ethernet Network Card

Chipset: RTL8111H + ASM1182e
Transmission Rate: 1000/100/10Mbps

Configuration: 2 x RJ45 Port

Dimension: 79 x 60 mm(PCIe Board)
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Antistatic bag
1 x Neutral box

Product weight: 50.7 g

PW7314



PCIe 1.1 (2.5 GT/s)

PCIe x1 8111H Quad-RJ45 Gigabit Ethernet Network Card


Chipset: RTL8111H + ASM2806
Transmission Rate: 1000/100/10Mbps

Configuration: 4 x RJ45 Port

Dimension: 113 x 68 mm(PCIe Board)
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Antistatic bag
1 x Neutral box

Product weight: 80.6 g

PW707

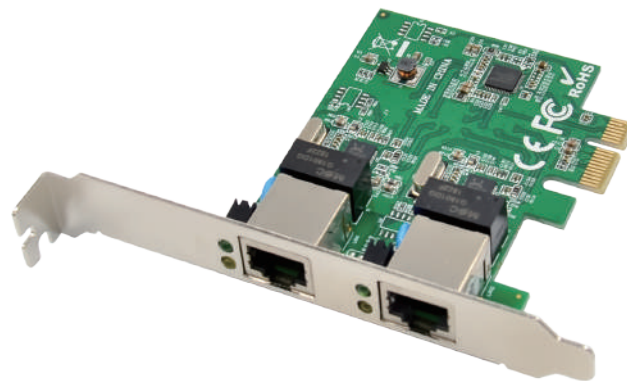

PCIe 1.1 (2.5 GT/s)

PCIe x1 8111F Dual-RJ45 Gigabit Ethernet Network Card


Chipset: RTL8111F + ASM1182e
Transmission Rate: 1000/100/10Mbps

Configuration: 2 x RJ45 Port

Dimension: 76 x 65 mm(PCIe Board)
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Antistatic bag
1 x Neutral box

Product weight: 52.2 g

PW712

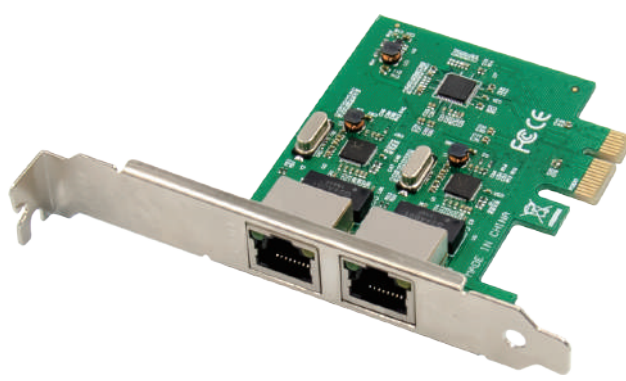

PCIe 1.1 (2.5 GT/s)

PCIe x1 8111F Dual-RJ45 Gigabit Ethernet Network Card


Chipset: RTL8111F + ASM1182e
Transmission Rate: 1000/100/10Mbps

Configuration: 2 x RJ45 Port

Dimension: 82 x 67 mm(PCIe Board)
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Antistatic bag
1 x Neutral box

Product weight: 45 g

PW708

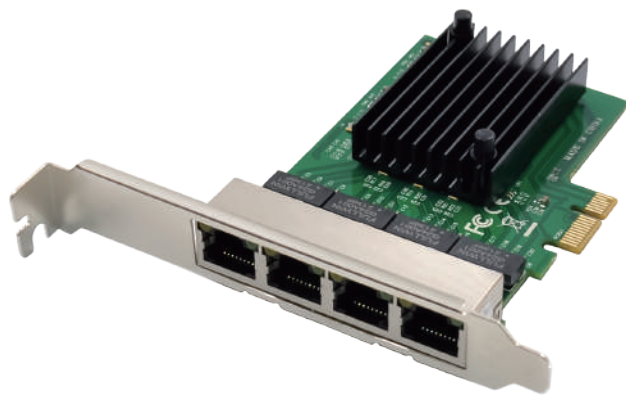

PCIe 1.1 (2.5 GT/s)

PCIe x1 8111F Quad-RJ45 Gigabit Ethernet Network Card

Chipset: RTL8111F + ASM1184e
Transmission Rate: 1000/100/10Mbps

Configuration: 4 x RJ45 Port

Dimension: 100 x 69 mm(PCIe Board)
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Antistatic bag
1 x Neutral box

Product weight: 74.8 g

PW

Product Updates
stay tuned

PCIe 1.1 (2.5 GT/s)

PCIe x1 8111H Eight-RJ45 Gigabit Ethernet Network Card

Chipset: RTL8111H +
Transmission Rate: 1000/100/10Mbps

Configuration: 8 x RJ45 Port

Dimension: 110 x 98 mm(PCIe Board)
Accessories: 1 x CD-Driver, 1 x Antistatic bag, 1 x Neutral box

Product weight: 194.7 g

PW7311



PCIe 2.0 (5 GT/s)

PCIe x1 WX1860 Quad-RJ45 Gigabit Ethernet Server NIC

Chipset: NETSWIFT WX1860
Transmission Rate: 1000/100/10Mbps

Configuration: 4 x RJ45 Port

Dimension: 150 x 68 mm(PCIe Board)
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Antistatic bag
1 x Neutral box

Product weight: 110 g

PW7310



PCIe 2.0 (5 GT/s)

PCIe x4 WX1860 Quad-RJ45 Gigabit Ethernet Server NIC


Chipset: NETSWIFT WX1860
Transmission Rate: 1000/100/10Mbps

Configuration: 4 x RJ45 Port

Dimension: 150 x 68 mm(PCIe Board)
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Antistatic bag
1 x Neutral box

Product weight: 112 g

PW703

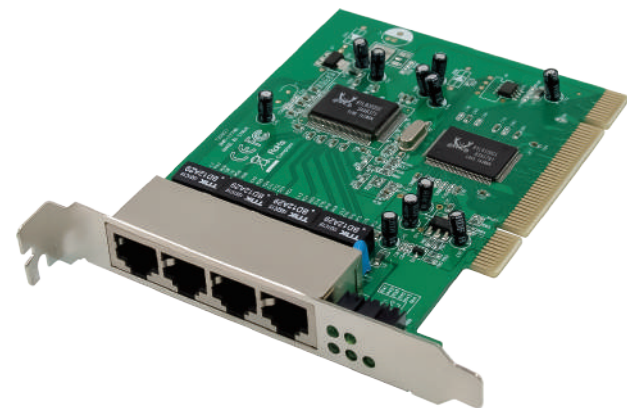

PW719



PCIe 1.1 (2.5 GT/s)


PCI RTL8305SC 4-Port 100M LAN Fast Ethernet Switch

Chipset: RTL8305SC + RTL8111CL Configuration: 4 x RJ45 Port
Transmission Rate: 100/10Mbps Per Port
Dimension: 120 x 92 mm(PCIe Board) Product weight: 80 g
Accessories: 1 x CD-Driver, 1 x Antistatic bag, 1 x Neutral box

PCIe x1 IC IP175 5-Port 100M LAN Fast Ethernet Switch


Chipset: IC+ Plus IP175 Configuration: 5 x RJ45 Port
Transmission Rate: 100/10Mbps Per Port
Dimension: 72 x 105 mm(PCIe Board) Product weight: 70 g
Accessories: 1 x CD-Driver, 1 x Antistatic bag, 1 x Neutral box

PW705

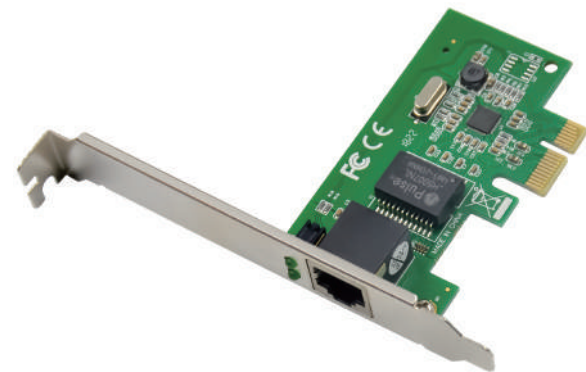

PCIe 1.1 (2.5 GT/s)

PW706

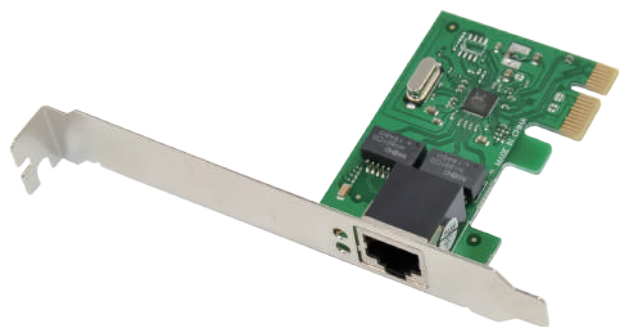

PCIe 1.1 (2.5 GT/s)

PCIe x1 8111E Single-RJ45 Gigabit Ethernet Network Card

Chipset: Realtek RTL8111E Configuration: 1 x RJ45 Port
Transmission Rate: 1000/100/10Mbps
Dimension: 80 x 47 mm(PCIe Board) Product weight: 32.6 g
Accessories: 1 x Low profile bracket, 1 x Antistatic bag
1 x Neutral box

PCIe x1 8111F Single-RJ45 Gigabit Ethernet Network Card

Chipset: Realtek RTL8111F Configuration: 1 x RJ45 Port
Transmission Rate: 1000/100/10Mbps
Dimension: 67 x 45 mm(PCIe Board) Product weight: 28.8 g
Accessories: 1 x Low profile bracket, 1 x Antistatic bag
1 x Neutral box

PW713



PCIe 1.1 (2.5 GT/s)

PW714



PCIe 1.1 (2.5 GT/s)

PCIe x1 8111G Single-RJ45 Gigabit Ethernet Network Card PCIe x1 8111C Single-RJ45 Gigabit Ethernet Network Card

Chipset: Realtek RTL8111G Configuration: 1 x RJ45 Port
Transmission Rate: 1000/100/10Mbps
Dimension: 70 x 65 mm(PCIe Board) Product weight: 35.5 g
Accessories: 1 x Low profile bracket, 1 x Antistatic bag
1 x Neutral box

Chipset: Realtek RTL8111C Configuration: 1 x RJ45 Port
Transmission Rate: 1000/100/10Mbps
Dimension: 65 x 40 mm(PCIe Board) Product weight: 29 g
Accessories: 1 x Low profile bracket, 1 x Antistatic bag
1 x Neutral box


PW701



PCI RTL8139D Single-LAN Fast Ethernet Network Card

Chipset: Realtek RTL8139D Configuration: 1 x RJ45 Port
Transmission Rate: 100/10Mbps
Dimension: 118 x 39 mm(PCI Board) Product weight: 43 g
Accessories: 1 x Low profile bracket, 1 x Antistatic bag
1 x Neutral box


PW702

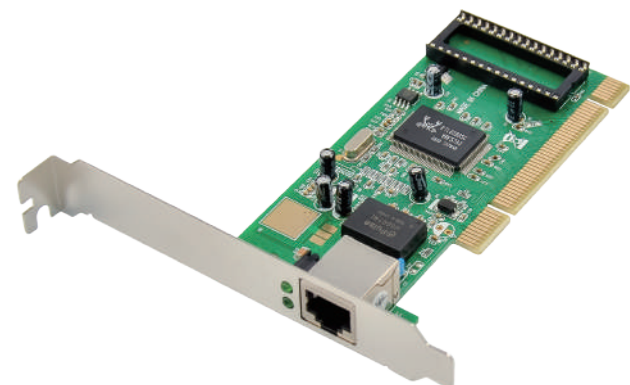

PCI RTL8169 Single-RJ45 1Gb Ethernet Network Card

Chipset: Realtek RTL8169SC Configuration: 1 x RJ45 Port
Transmission Rate: 1000/100/10Mbps
Dimension: 118 x 58 mm(PCI Board) Product weight: 48 g
Accessories: 1 x Low profile bracket, 1 x Antistatic bag
1 x Neutral box


PW7503

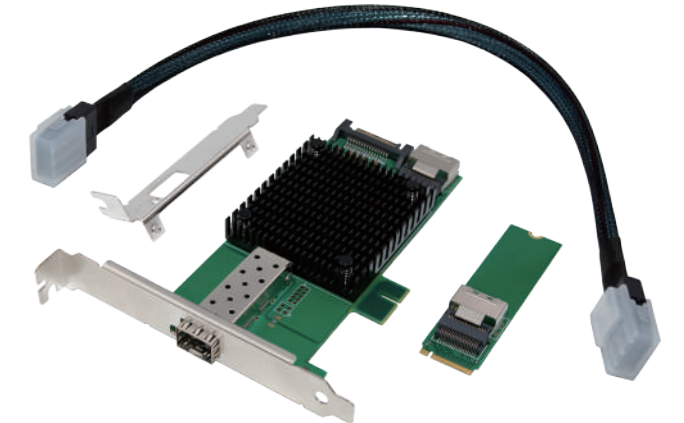

SFP+ Board: 130 x 68 mm

SAS

PW7331

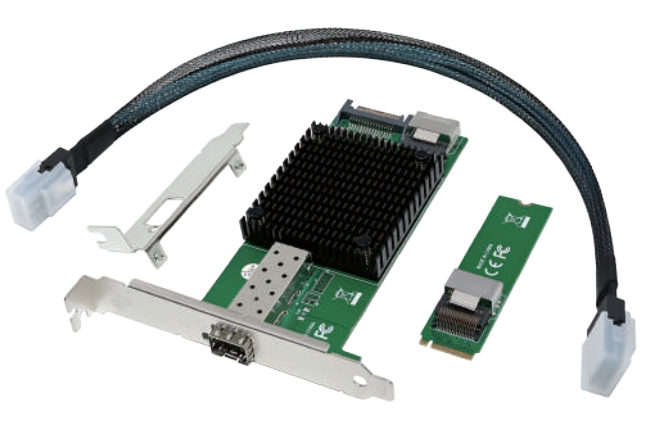

SFP+ Board: 130 x 55 mm

SAS

M.2 X520 Single-10GbE SFP+ Industrial Server NIC SAS

Chipset: Intel 82599EN

Configuration: 1 x SFP+ Port

Data Rate Per Port: 10/1GbE

Dimension: 22 x 80 mm (M.2 Board)

Product weight: 110 g

Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual

1 x SAS Network Cable Length: 42cm, 1 x Neutral box

M.2 X520 Single-10GbE SFP+ Industrial Server NIC SAS

Chipset: Intel 82599EN

Configuration: 1 x SFP+ Port

Data Rate Per Port: 10/1GbE


Dimension: 22 x 80 mm (M.2 Board)

Product weight: 110 g

Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual

1 x SAS Network Cable Length: 42cm, 1 x Neutral box


PW7433

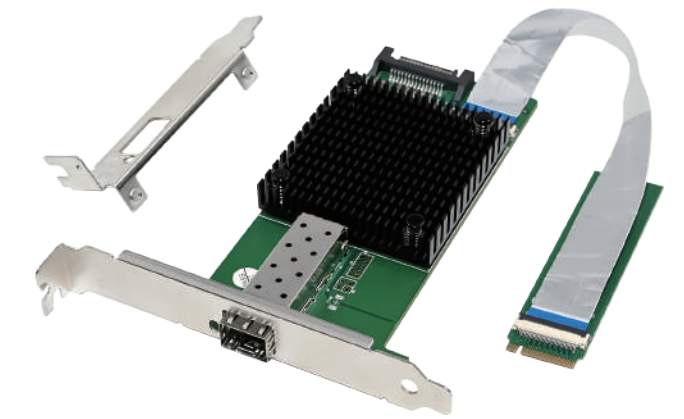

SFP+ Board: 130 x 55 mm

FPC

PW7467

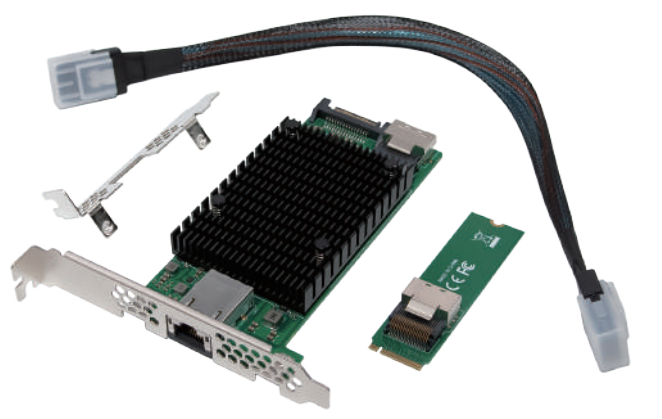

SFP+ Board: 130 x 55 mm

SAS

M.2 X520 Single-10GbE SFP+ Industrial Server NIC FPC

Chipset: Intel 82599EN

Configuration: 1 x SFP+ Port

Data Rate Per Port: 10/1GbE

Dimension: 22 x 80 mm (M.2 Board)

Product weight: 98.9 g

Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual

1 x FPC Network Cable Length: 20cm, 1 x Neutral box

M.2 X520 Single-10GbE RJ45 Industrial Server NIC SAS

Chipset: Intel 82599EN

Configuration: 1 x RJ45 Port

Data Rate Per Port: 10/1GbE/100Mbps


Dimension: 22 x 80 mm (M.2 Board)

Product weight: 122.6 g

Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual

1 x SAS Network Cable Length: 42cm, 1 x Neutral box

PW7515

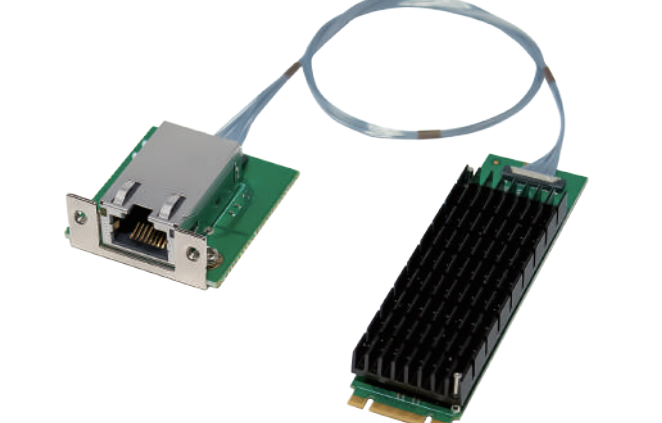

RJ45 Board: 38 x 35 mm

PW7516



RJ45 Board: 38 x 60 mm

M.2 B+M AQC107S Single-RJ45 10G mGig Ethernet NIC

Chipset: Marvell AQC107S

Configuration: 1 x RJ45 Port

Data Rate Supported: 10G/5G/2.5G/1G/100M

Dimension: 22 x 80 mm (M.2 Board)

Product weight: 32 g

Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box

1 x Precision Network Cable length: 30cm

M.2 B+M AQC107S Single-RJ45 10G mGig Ethernet NIC

Chipset: Marvell AQC107S

Configuration: 1 x RJ45 Port

Data Rate Supported: 10G/5G/2.5G/1G/100M

Dimension: 22 x 80 mm (M.2 Board)

Product weight: 32 g

Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual


1 x Precision Network Cable length: 30cm, 1 x Neutral box

PW7517



RJ45 Board: 38 x 35 mm

PW7518

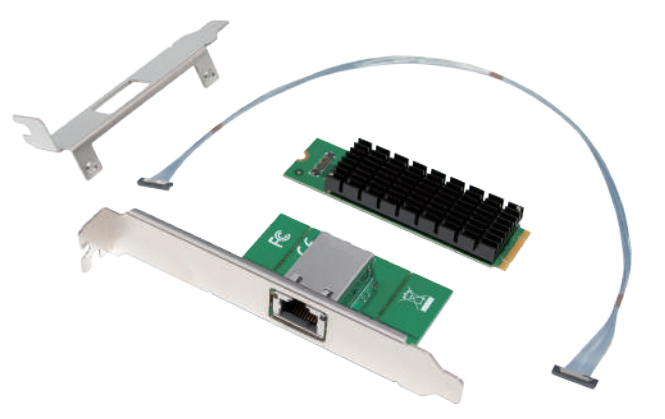

RJ45 Board: 38 x 60 mm

M.2 B+M AQC113 Single- RJ45 10G mGig Ethernet NIC

Chipset: Marvell AQC113

Configuration: 1 x RJ45 Port

Data Rate Supported: 10G/5G/2.5G/1G/100M/10M

Dimension: 22 x 80 mm (M.2 Board)

Product weight: 32 g

Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box

1 x Precision Network Cable length: 30cm

M.2 B+M AQC113 Single- RJ45 10G mGig Ethernet NIC

Chipset: Marvell AQC113

Configuration: 1 x RJ45 Port

Data Rate Supported: 10G/5G/2.5G/1G/100M/10M

Dimension: 22 x 80 mm (M.2 Board)

Product weight: 32 g

Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual

1 x Precision Network Cable length: 30cm, 1 x Neutral box

PW7522



RJ45 Board: 38 x 35 mm

FPC

M.2 B+M AQC107S Single-RJ45 10G mGig Ethernet NIC

Chipset: Marvell AQC107S Configuration: 1 x RJ45 Port
Data Rate Supported: 10G/5G/2.5G/1G/100M
Dimension: 22 x 80 mm (M.2 Board) Product weight: 27.6 g
Accessories: 1 x CD-Driver, 1 x User's manual, 1 x Neutral box
1 x FPC Network Cable Length: 20cm

PW7523



RJ45 Board: 38 x 35 mm

FPC

M.2 B+M AQC113 Single- RJ45 10G mGig Ethernet NIC

Chipset: Marvell AQC113 Configuration: 1 x RJ45 Port
Data Rate Supported: 10G/5G/2.5G/1G/100M/10M
Dimension: 22 x 80 mm (M.2 Board) Product weight: 27.5 g
Accessories: 1 x CD-Driver, 1 x User's manual, 1 x Neutral box
1 x FPC Network Cable Length: 20cm

PW7466



RJ45 Board: 38 x 60 mm

FPC

M.2 B+M AQC113 Single- RJ45 10G mGig Ethernet NIC

Chipset: Marvell AQC113 Configuration: 1 x RJ45 Port
Data Rate Supported: 10G/5G/2.5G/1G/100M/10M
Dimension: 22 x 80 mm (M.2 Board) Product weight: 48.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
1 x FPC Network Cable Length: 20cm, 1 x Neutral box

PW7355



RJ45 Board: 38 x 60 mm

FPC

M.2 B+M AQC107S Single-RJ45 10G mGig Ethernet NIC

Chipset: Marvell AQC107S Configuration: 1 x RJ45 Port
Data Rate Supported: 10G/5G/2.5G/1G/100M
Dimension: 22 x 80 mm (M.2 Board) Product weight: 48.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
1 x SAS Network Cable Length: 20cm, 1 x Neutral box

PW7303




RJ45 Port: L35 x W21 x H22 mm

MiniPCIE I350T2 Dual-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM2 Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps (Copper)
Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 110 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
2 x 8-pin RJ45 Cable length: 30.5cm, 1 x Neutral box

PW7423

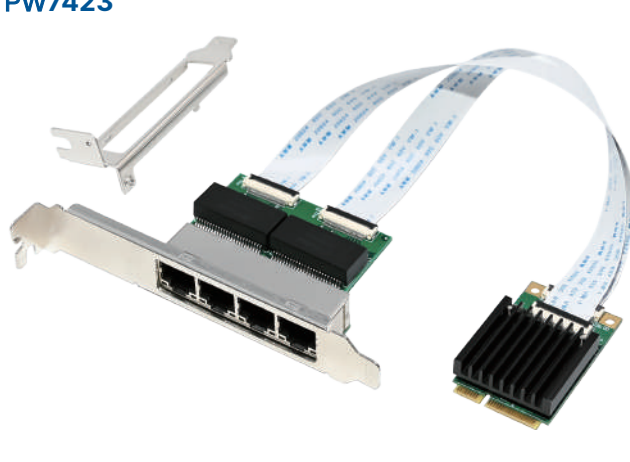


RJ45 Board: 52 x 63 mm

FPC

MiniPCIE I350T4 Quad-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM4 Configuration: 4 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps (Copper)
Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 69.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
2 x FPC Network Cable length: 20cm, 1 x Neutral box

PW7242

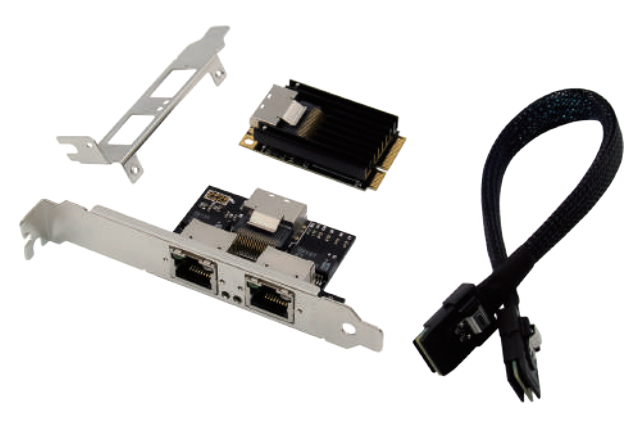

RJ45 Board: 41 x 63mm

SAS

MiniPCIE I350T2 Dual-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM2 Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps (Copper)
Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 70 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
1 x 10-pin Network Cable length: 30.5cm, 1 x Neutral box

PW7243



SFP Board: 72 x 63 mm

SAS

MiniPCIE I350F2 Dual-SFP Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM2 Configuration: 2 x SFP Port
Data Rate Per Port: 1000 Mbps (Fiber)
Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 80 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
1 x 10-pin Network Cable length: 30.5cm, 1 x Neutral box

PW7528




RJ45 Board: 30 x 33 mm

M.2 B+M I226-T2 Dual- RJ45 2.5G Ethernet Server NIC

Chipset: Intel I226 + Configuration: 2 x RJ45 Port
Data Rate Per Port: 2.5/1GbE/100/10Mbps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 50.1 g
Accessories: 1 x CD-Driver, 1 x User's manual, 1 x Neutral box
2 x 12-pin Network Cable Length: 30cm

PW7366

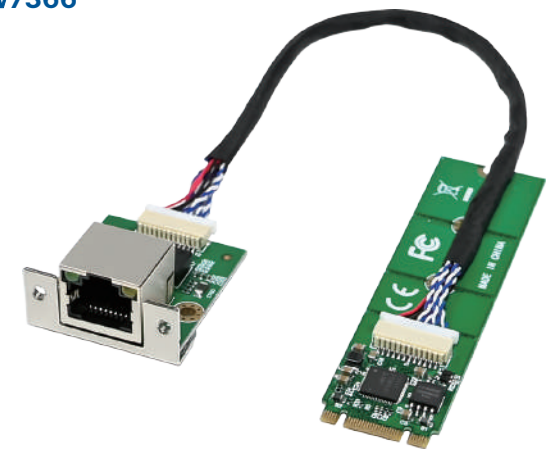

RJ45 Board: L33 x W30 x H15 mm

M.2 B+M I225-T1 Single-RJ45 2.5G Ethernet Server NIC

Chipset: Intel I225-V Configuration: 1 x RJ45 Port
Data Rate Per Port: 2.5/1GbE/100/10Mbps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 4.8 g
Accessories: 1 x CD-Driver, 1 x User's manual, 1 x Neutral box
1 x 12-pin Network Cable Length: 20.8cm

PW7465




RJ45 Board: 30 x 45 mm

M.2 B+M I226-T2 Dual- RJ45 2.5G Ethernet Server NIC

Chipset: Intel I226 + Configuration: 2 x RJ45 Port
Data Rate Per Port: 2.5/1GbE/100/10Mbps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 68 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
2 x 12-pin Network Cable Length: 30cm, 1 x Neutral box

PW7365

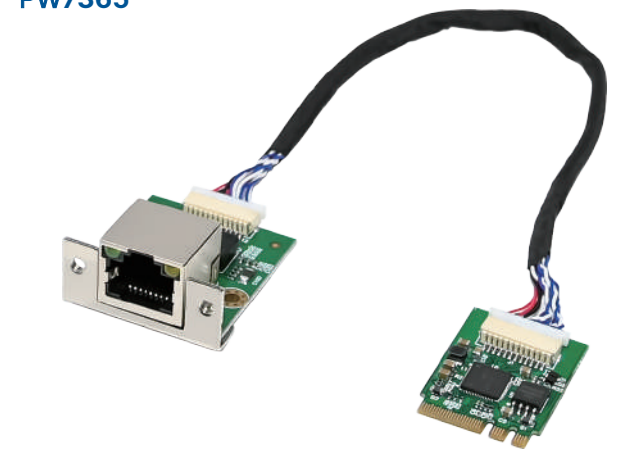

RJ45 Board: L33 x W30 x H15 mm

M.2 A+E I225-T1 Single-RJ45 2.5G Ethernet Server NIC

Chipset: Intel I225-V Configuration: 1 x RJ45 Port
Data Rate Per Port: 2.5/1GbE/100/10Mbps
Dimension: 22 x 30 mm (M.2 Board) Product weight: 2.2 g
Accessories: 1 x CD-Driver, 1 x User's manual, 1 x Neutral box
1 x 12-pin Network Cable Length: 20.8cm

PW7360



RJ45 Board: L45 x W30 x H15 mm

MiniPCIE I225-T2 Dual- RJ45 2.5G Ethernet Server NIC

Chipset: Intel I225 + Configuration: 2 x RJ45 Port
Data Rate Per Port: 2.5/1GbE/100/10Mbps
Dimension: 30 x 51 mm (MiniPCIE) Product weight: 15 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x 12-pin Network Cable length: 31cm

PW7304



RJ45 Port: L35 x W21 x H22 mm

M.2 B+M I225-T1 Single-RJ45 2.5G Ethernet Server NIC

Chipset: Intel I225-V Configuration: 1 x RJ45 Port
Data Rate Per Port: 2.5/1GbE/100/10Mbps
Dimension: 22 x 42 mm (M.2 Board) Product weight: 32 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 10-pin Network Cable length: 26.5cm, 1 x Neutral box

PW7361



RJ45 Board: L33 x W30 x H15 mm

MiniPCIE I225-T2 Dual- RJ45 2.5G Ethernet Server NIC

Chipset: Intel I225 + Configuration: 2 x RJ45 Port
Data Rate Per Port: 2.5/1GbE/100/10Mbps
Dimension: 30 x 51 mm (MiniPCIE) Product weight: 15 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x 12-pin Network Cable length: 31cm

PW7305



RJ45 Board: x mm

M.2 B+M I225-T1 Single-RJ45 2.5G Ethernet Server NIC

Chipset: Intel I225-V Configuration: 1 x RJ45 Port
Data Rate Per Port: 2.5/1GbE/100/10Mbps
Dimension: 22 x 42 mm (M.2 Board) Product weight: 40.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
1 x 10-pin/4-pin Cable length: 26.5cm, 1 x Neutral box

PW7362



RJ45 Board: L45 x W30 x H15 mm

PW7363



RJ45 Board: L33 x W30 x H15 mm


MiniPCIE I210T2 Dual-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel WGI210AT+ Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 15.1 g
Accessories: 1 x CD-Driver, 1 x User's manual, 1 x Neutral box
2 x 12-pin Network Cable length: 31cm

MiniPCIE I210T2 Dual-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel WGI210AT+ Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 15.1 g
Accessories: 1 x CD-Driver, 1 x User's manual, 1 x Neutral box
2 x 12-pin Network Cable length: 31cm

PW7254

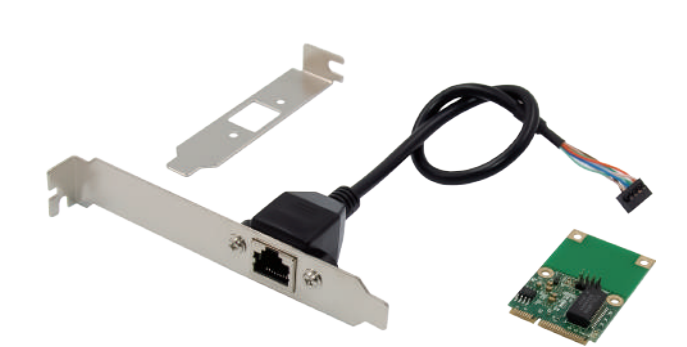

RJ45 Port: L35 x W21 x H22 mm

PW7302



RJ45 Port: L35 x W21 x H22 mm

MiniPCIE I210 Single-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel WGI210AT Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 36 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
1 x 8-pin Network cable: 26.5CM, 1 x Neutral box

MiniPCIE I210T2 Dual-RJ45 Gigabit Ethernet Server NIC


Chipset: Intel WGI210AT+ Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 36 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
2 x 8-pin Network cable: 30.5CM, 1 x Neutral box

PW7332



SFP Board: 52 x 30 mm

PW7494

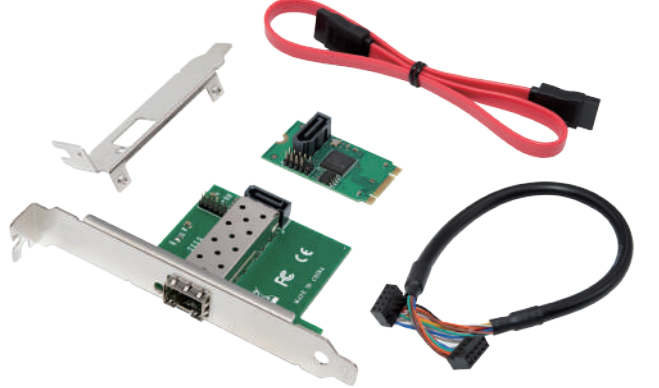

SFP Board: 52 x 63 mm

M.2 B+M I210F1 Single-SFP Gigabit Ethernet Server NIC

Chipset: Intel WGI210CS Configuration: 1 x SFP Port
Data Rate Per Port: 1GbE
Dimension: 22 x 42 mm (M.2 Board) Product weight: 18 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x FPC Network Cable length: 20cm

M.2 B+M I210F1 Single-SFP Gigabit Ethernet Server NIC

Chipset: Intel WGI210CS Configuration: 1 x SFP Port
Data Rate Per Port: 1GbE
Dimension: 22 x 42 mm (M.2 Board) Product weight: 50 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
1 x 9-pin Network Cable: 26.5cm, 1 x SATA Cable, 1 x Neutral box

PW7333



RJ45 Board: L45 x W30 x H15 mm

PW7527



RJ45 Board: L30 x W33 x H15 mm


M.2 B+M I210T2 Dual-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel WGI210AT+ Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 68 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 12-pin Network Cable length: 30cm, 1 x Neutral box

M.2 B+M I210T2 Dual-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel WGI210AT+ Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 50 g
Accessories: 1 x CD-Driver, 1 x User's manual, 1 x Neutral box
2 x 12-pin Network Cable length: 30cm

PW7251

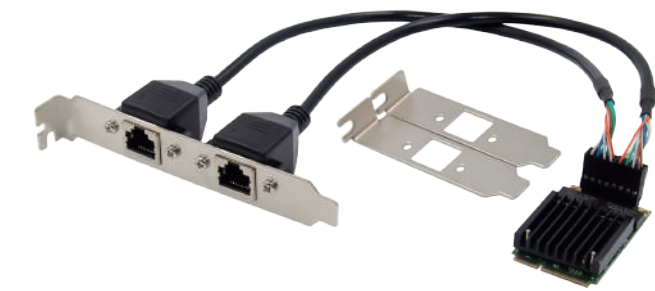


RJ45 Port: L35 x W21 x H22 mm

MiniPCIE 82583 Dual- RJ45 Copper Gigabit Server NIC

Chipset: Intel WG82583V+ Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 86.5 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
2 x 10-pin RJ45 Cable Length: 31cm, 1 x Neutral box

PW7521

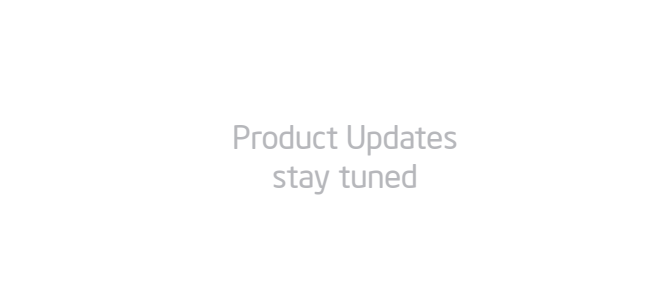

RJ45 Port: L35 x W21 x H22 mm

M.2 B+M 82583 Dual- RJ45 Copper Gigabit Server NIC

Chipset: Intel WG82583V+ Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 98.9 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
2 x 10-pin RJ45 Cable Length: 31cm, 1 x Neutral box

PW7247



RJ45 Port: L35 x W21 x H22 mm

MiniPCIE 82583 Dual- RJ45 Copper Gigabit Server NIC

Chipset: Intel WG82583V+ Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 86.5 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
2 x 10-pin RJ45 Cable Length: 31cm, 1 x Neutral box

PW




RJ45 Port: L35 x W21 x H22 mm

M.2 B+M 82583 Dual- RJ45 Copper Gigabit Server NIC

Chipset: Intel WG82583V+ Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 32 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
2 x 10-pin RJ45 Cable Length: 31cm, 1 x Neutral box

PW7226

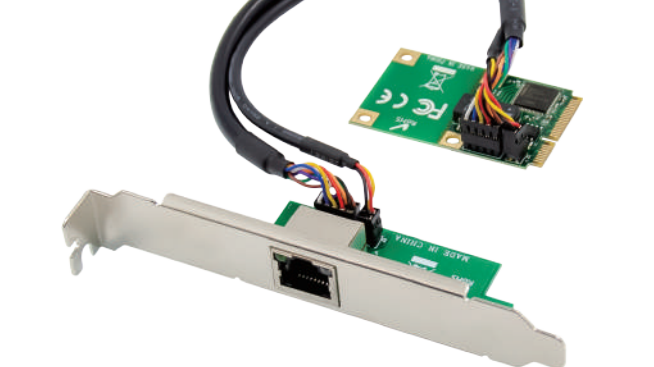

RJ45 Board: 25 x 63 mm

MiniPCIE 82574 Single-RJ45 Copper Gigabit Server NIC

Chipset: Intel WG82574L Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
1 x 10-pin/4-pin Cable Length: 28cm, 1 x Neutral box

PW



RJ45 Port: L35 x W21 x H22 mm

M.2 B+M 82574 Dual- RJ45 Copper Gigabit Server NIC

Chipset: Intel WG82574L+ Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 32 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
2 x 10-pin RJ45 Cable Length: 31cm, 1 x Neutral box

PW7237



RJ45 Port: L35 x W21 x H22 mm

MiniPCIE 82574 Single-RJ45 Copper Gigabit Server NIC

Chipset: Intel WG82574L Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
1 x 10-pin RJ45 Cable Length: 31cm, 1 x Neutral box

PW7520




RJ45 Port: L35 x W21 x H22 mm

M.2 B+M 82574 Dual- RJ45 Copper Gigabit Server NIC

Chipset: Intel WG82574L+ Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 32 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
2 x 10-pin RJ45 Cable Length: 31cm, 1 x Neutral box

PW7301

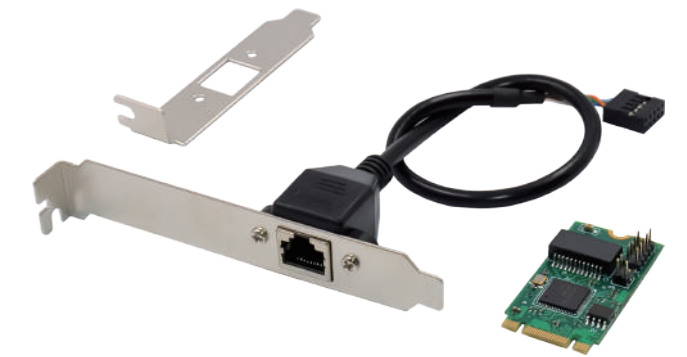

RJ45 Port: L35 x W21 x H22 mm

M.2 B+M I210 Single-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel WGI210AT Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 22 x 42 mm (M.2 Board) Product weight: 16.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
1 x 8-pin Network Cable Length: 26.5cm, 1 x Neutral box

PW7300




RJ45 Board: L63 x W25 x H15 mm

M.2 B+M I210 Single-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel WGI210AT Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 22 x 42 mm (M.2 Board) Product weight: 94.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
1 x 10-pin/4-pin Network Cable Length: 26.5cm, 1 x Neutral box

PW7497

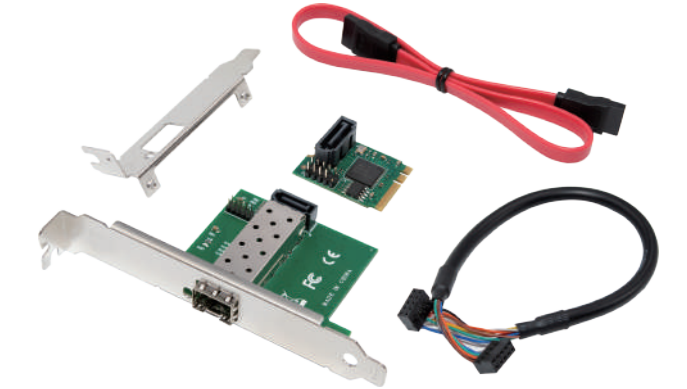

SFP Board: 52 x 63 mm

M.2 A+E I210F1 Single-SFP Gigabit Ethernet Server NIC

Chipset: Intel WGI210CS Configuration: 1 x SFP Port
Data Rate Per Port: 1GbE
Dimension: 22 x 42 mm (M.2 Board) Product weight: 98 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
1 x 9-pin Network Cable: 26.5cm, 1 x SATA Cable, 1 x Neutral box

PW7241



SFP Board: 52 x 63 mm

MiniPCIE I210F1 Single-SFP Gigabit Ethernet Server NIC

Chipset: Intel WGI210CS Configuration: 1 x SFP Port
Data Rate Per Port: 1GbE
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 50 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
1 x 9-pin Network Cable: 26.5cm, 1 x SATA Cable, 1 x Neutral box

PW7248




RJ45 Board: x mm

M.2 A+E I210 Single- RJ45 Gigabit Ethernet Server NIC

Chipset: Intel WGI210AT Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 22 x 30 mm(M.2 Board) Product weight: 23 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
1 x 16-pin Network Cable length: 18cm, 1 x Neutral box

PW7249

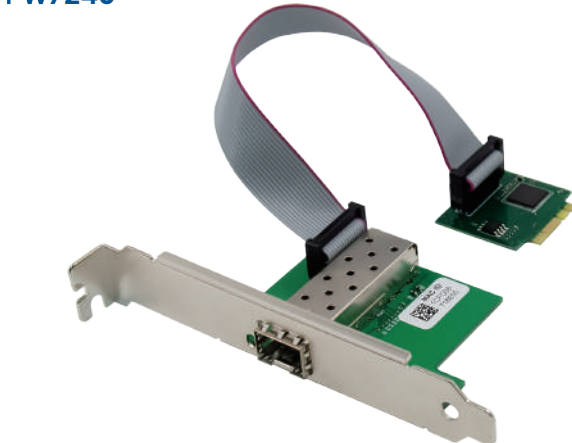


SFP Board: 52 x 63 mm

M.2 A+E I210F1 Single-SFP Gigabit Ethernet Server NIC

Chipset: Intel WGI210CS Configuration: 1 x SFP Port
Data Rate Per Port: 1GbE
Dimension: 22 x 30 mm(M.2 Board) Product weight: 24 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's manual
1 x 16-pin Network Cable length: 18cm, 1 x Neutral box

PW7273

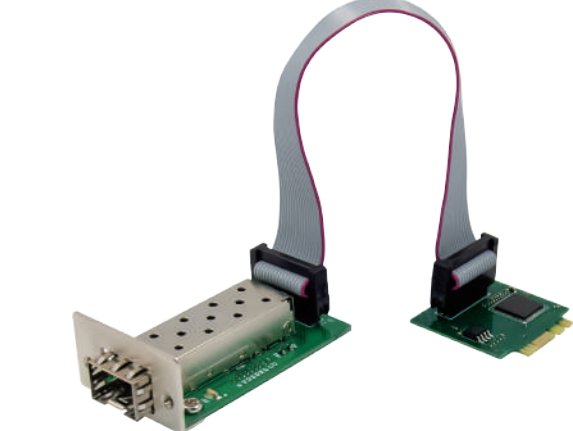

SFP Board: 52 x 63 mm

M.2 A+E I210F1 Single-SFP Gigabit Ethernet Server NIC

Chipset: Intel WGI210CS Configuration: 1 x SFP Port
Data Rate Per Port: 1GbE
Dimension: 30 x 30 mm(M.2 Board) Product weight: 24 g
Accessories: 1 x CD-Driver, 1 x User's manual, 1 x Neutral box
1 x 16-pin Network Cable length: 18cm

PW7274



RJ45 Board: 30 x 33 mm

M.2 A+E I210 Single- RJ45 Gigabit Ethernet Server NIC


Chipset: Intel WGI210AT Configuration: 1 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 22 x 30 mm(M.2 Board) Product weight: 23 g
Accessories: 1 x CD-Driver, 1 x User's manual, 1 x Neutral box
1 x 16-pin Network Cable length: 18cm

PW7452



SFP Board: 50 x 30 mm

PW7496

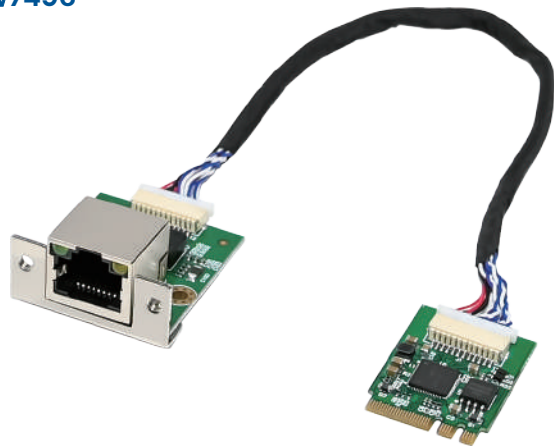

RJ45 Board: L33 x W30 x H15 mm

M.2 A+E I210F1 Single-SFP Gigabit Ethernet Server NIC

Chipset: Intel WGI210CL Configuration: 1 x SFP Port
Data Rate Per Port: 1GbE
Dimension: 22 x 30 mm (M.2 Board) Product weight: 17.3 g
Accessories: 1 x CD-Driver, 1 x User's manual, 1 x Neutral box
1 x FPC Network Cable Length: 20cm

M.2 A+E I226-T1 Single-RJ45 2.5G Ethernet Server NIC

Chipset: Intel I226-V Configuration: 1 x RJ45 Port
Data Rate Per Port: 2.5/1GbE/100/10Mbps
Dimension: 22 x 30 mm (M.2 Board) Product weight: 2.2 g
Accessories: 1 x CD-Driver, 1 x User's manual, 1 x Neutral box
1 x 12-pin Network Cable Length: 20.8cm

PW7320



RJ45 Board: L45 x W30 x H15 mm

PW7529



RJ45 Board: L30 x W33 x H15 mm


M.2 B+M I211T2 Dual-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel WGI211AT+ Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 68 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 12-pin Network Cable length: 30cm, 1 x Neutral box

M.2 B+M I211T2 Dual-RJ45 Gigabit Ethernet Server NIC


Chipset: Intel WGI211AT+ Configuration: 2 x RJ45 Port
Data Rate Per Port: 10/100/1000 Mbps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 50 g
Accessories: 1 x CD-Driver, 1 x User's manual, 1 x Neutral box
2 x 12-pin Network Cable length: 30cm

PW7371

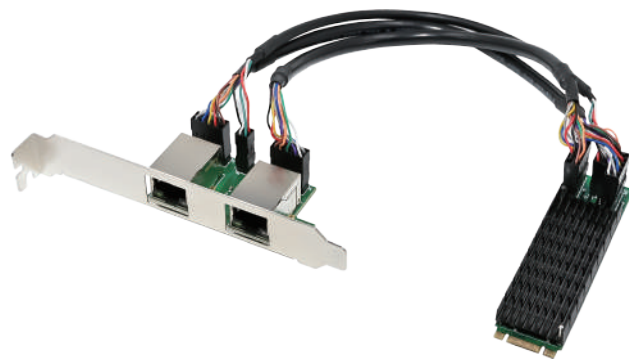

RJ45 Board: 32 x 56 mm

PW7471

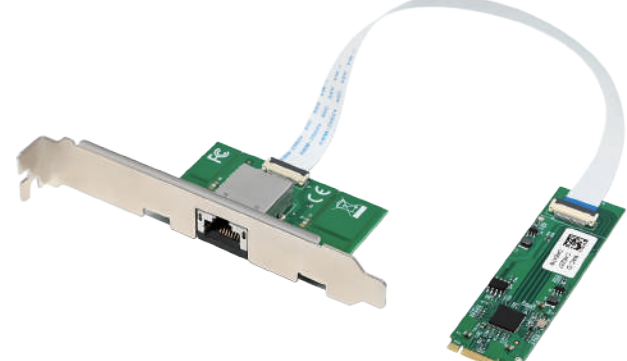

RJ45 Board: 38 x 61 mm

M.2 B+M 8125BG Dual- RJ45 2.5G Ethernet Server NIC

Chipset: Realtek RTL8125BG+ Configuration: 2 x RJ45 Port
Transmission Rate: 2.5Gbps/1000/100/10Mbps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 81.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
2 x 9-pin/4-pin Cable length: 26.5cm

M.2 B+M RTL8126 Single-RJ45 5G Ethernet Server NIC


Chipset: Realtek RTL8126 Configuration: 1 x RJ45 Port
Transmission Rate: 5Gbps/2.5Gbps/1000/100/10Mbps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 35.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x FPC Network Cable length: 30cm

PW7201



RJ45 Port: L35 x W21 x H22 mm

PW7367

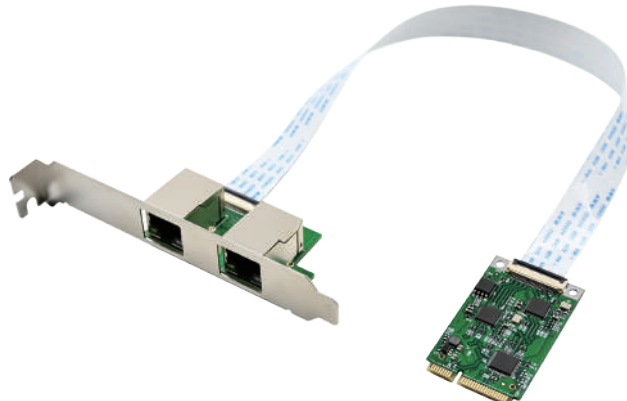

RJ45 Board: 32 x 56 mm

FPC

MiniPCIE 8125BG Single-RJ45 2.5G Ethernet Server NIC

Chipset: Realtek RTL8125BG Configuration: 1 x RJ45 Port
Transmission Rate: 2.5Gbps/1000/100/10Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 49.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x 10-pin RJ45 Cable length: 30cm

MiniPCIE 8125BG Dual- RJ45 2.5G Ethernet Server NIC

Chipset: Realtek RTL8125BG+ Configuration: 2 x RJ45 Port
Transmission Rate: 2.5Gbps/1000/100/10Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 32.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x FPC Network Cable length: 30cm

PW7269



RJ45 Board: L30 x W57 x H15 mm

FPC

M.2 B+M RTL8111H Dual- RJ45 Gigabit Ethernet Card

Chipset: Realtek RTL8111H+ Configuration: 2 x RJ45 Port
Transmission Rate: 1000/100/10 Mbps
Dimension: 22 x 42 mm (M.2 Board) Product weight: 35 g
Accessories: 1 x FPC Network Cable Length: 20cm, 1 x Neutral box
1 x Low profile bracket, 1 x Antistatic bag

PW7364



RJ45 Board: L30 x W20 x H15 mm

MiniPCIE RTL8111H Dual- RJ45 Gigabit Ethernet Card

Chipset: Realtek RTL8111H+ Configuration: 2 x RJ45 Port
Transmission Rate: 1000/100/10 Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 13 g
Accessories: 2 x 12-pin network cable: 30cm
1 x Neutral box

PW7272



RJ45 Board: L53 x W65 x H15 mm

M.2 B+M RTL8111H Quad- RJ45 Gigabit Ethernet Card

Chipset: Realtek RTL8111H+ Configuration: 4 x RJ45 Port
Transmission Rate: 1000/100/10 Mbps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 79 g
Accessories: 1 x Low profile bracket, 2 x FPC Network Cable: 20cm
1 x Antistatic bag, 1 x Neutral box

PW7282




RJ45 Board: L30 x W20 x H15 mm

M.2 A+E RTL8111G Single- RJ45 Gigabit Ethernet Card

Chipset: Realtek RTL8111G Configuration: 2 x RJ45 Port
Transmission Rate: 1000/100/10 Mbps
Dimension: 22 x 30 mm (M.2 Board) Product weight: 18 g
Accessories: 1 x Antistatic bag, 1 x 12-pin Network Cable: 30cm
1 x Neutral box

PW7417

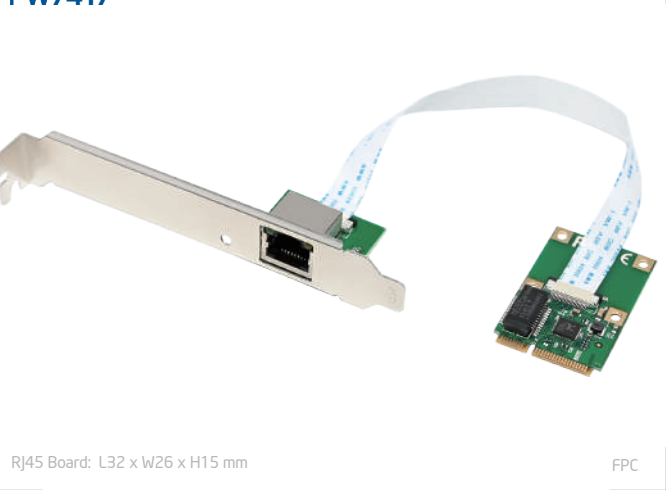


RJ45 Board: L32 x W26 x H15 mm

MiniPCIE RTL8111F Single- RJ45 Gigabit Ethernet Card

Chipset: Realtek RTL8111F Configuration: 1 x RJ45 Port
Transmission Rate: 1000/100/10 Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 4.5 g
Accessories: 1 x FPC network cable length: 20cm, 1 x Antistatic bag
1 x Low profile bracket, 1 x Neutral box

PW7393

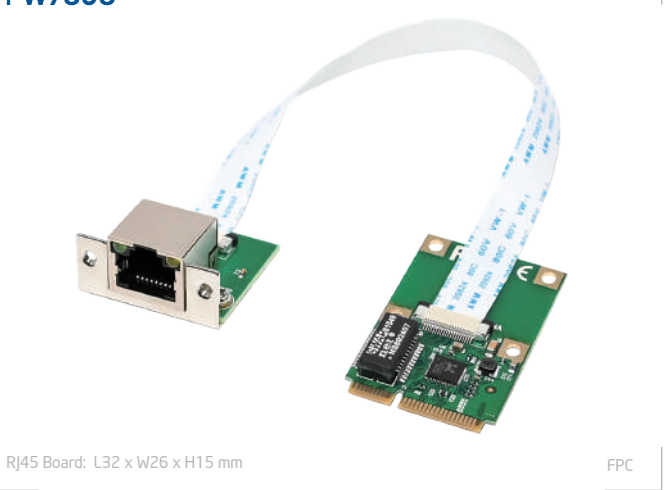

RJ45 Board: L32 x W26 x H15 mm

MiniPCIE RTL8111F Single- RJ45 Gigabit Ethernet Card

Chipset: Realtek RTL8111F Configuration: 1 x RJ45 Port
Transmission Rate: 1000/100/10 Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 4.5 g
Accessories: 1 x FPC network cable length: 20cm, 1 x Antistatic bag
1 x Neutral box

PW7245




RJ45 Port: L35 x W21 x H22 mm

M.2 B+M RTL8111F Single- RJ45 Gigabit Ethernet Card

Chipset: Realtek RTL8111F Configuration: 1 x RJ45 Port
Transmission Rate: 1000/100/10 Mbps
Dimension: 22 x 42 mm (M.2 Board) Product weight: 41.3 g
Accessories: 1 x 10-pin/4-pin Cable length: 26.5cm, 1 x Neutral box
1 x Low profile bracket

PW7392

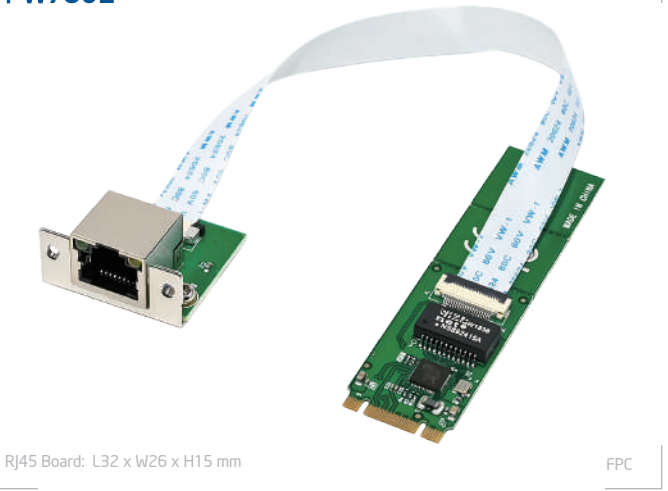

RJ45 Board: L32 x W26 x H15 mm

M.2 B+M RTL8111F Single- RJ45 Gigabit Ethernet Card

Chipset: Realtek RTL8111F Configuration: 1 x RJ45 Port
Transmission Rate: 1000/100/10 Mbps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 32.3 g
Accessories: 1 x FPC network cable length: 20cm, 1 x Antistatic bag
1 x Neutral box

PW7202



RJ45 Board: 30 x 20 mm

MiniPCIE RTL8111F Single- RJ45 Gigabit Ethernet Card

Chipset: Realtek RTL8111F Configuration: 1 x RJ45 Port
Transmission Rate: 1000/100/10 Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 44.3g
Accessories: 1 x 16-pin network cable length: 18cm, 1 x Neutral box
1 x Low profile bracket, 1 x Antistatic bag

PW7240



RJ45 Board: L45 x W30 x H15 mm

MiniPCIE RTL8111F Single- RJ45 Gigabit Ethernet Card

Chipset: Realtek RTL8111F Configuration: 1 x RJ45 Port
Transmission Rate: 1000/100/10 Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x 10-pin RJ45 Cable: 31cm
1 x Antistatic bag, 1 x Neutral box

PW7277




RJ45 Board: L30 x W20 mm

MiniPCIE RTL8111F Single- RJ45 Gigabit Ethernet Card

Chipset: Realtek RTL8111F Configuration: 1 x RJ45 Port
Transmission Rate: 1000/100/10 Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 19 g
Accessories: 1 x 16-pin network cable length: 18cm, 1 x Neutral box
1 x Antistatic bag

PW7281

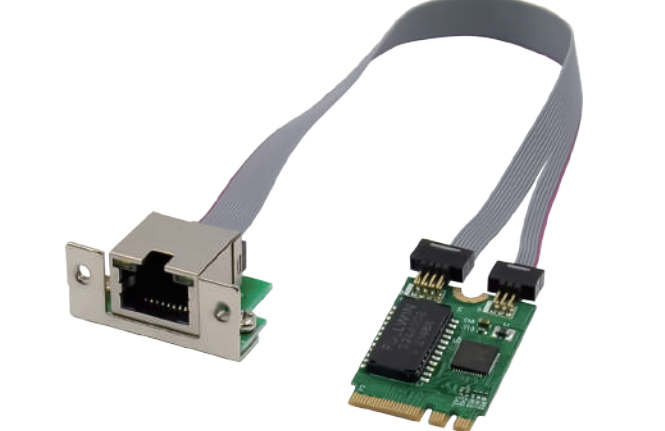


RJ45 Board: L30 x W20 x H15 mm

M.2 B+M I211T2 Dual-RJ45 Gigabit Ethernet Server NIC

Chipset: Realtek RTL8111F Configuration: 1 x RJ45 Port
Transmission Rate: 1000/100/10 Mbps
Dimension: 22 x 30 mm (M.2 Board) Product weight: 13 g
Accessories: 1 x 8-pin/6-pin Network Cable: 18cm, 1 x Neutral box
1 x Antistatic bag

PW7227

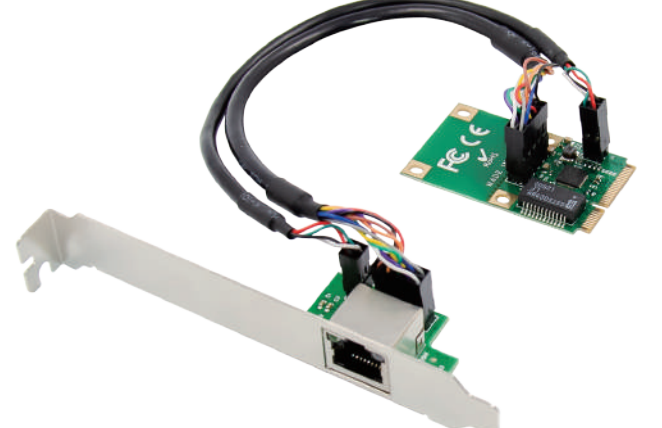

RJ45 Board: L25 x W38 x H15 mm

MiniPCIE RTL8111F Single- RJ45 Gigabit Ethernet Card

Chipset: Realtek RTL8111F Configuration: 1 x RJ45 Port
Transmission Rate: 1000/100/10 Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 45 g
Accessories: 1 x 10-pin/4-pin Network Cable Length: 26.5cm
1 x Low profile bracket, 1 x Neutral box

PW




RJ45 Port: L35 x W21 x H22 mm

MiniPCIE 8125BG Single-RJ45 2.5G Ethernet Server NIC

Chipset: Realtek RTL8125BG Configuration: 1 x RJ45 Port
Transmission Rate: 2.5Gbps/1000/100/10Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 49.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x 10-pin RJ45 Cable length: 30cm

PW7228

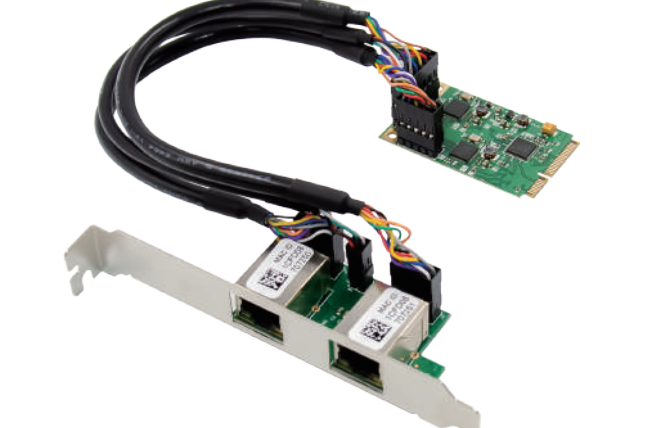

RJ45 Board: L x W x H mm

MiniPCIE RTL8111F Dual- RJ45 Gigabit Ethernet Card

Chipset: Realtek RTL8111F+ Configuration: 2 x RJ45 Port
Transmission Rate: 1000/100/10 Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: g
Accessories: 2 x 10-pin Network Cable, 1 x 4-pin LED Cable: 26.5cm
1 x Low profile bracket, 1 x Neutral box

PW



RJ45 Board: 32 x 56 mm

MiniPCIE 8125BG Dual- RJ45 2.5G Ethernet Server NIC

Chipset: Realtek RTL8125BG+ Configuration: 2 x RJ45 Port
Transmission Rate: 2.5Gbps/1000/100/10Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 32.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x FPC Network Cable length: 30cm

PW7478




Data Rate: 10/100/1000 Mbps

Isolator

PCle x4 I350AM4 Quad-1GbE M12 Frame Grabber NIC

Chipset: Intel NHI350AM4 Configuration: 4 x PoE+ (M12)
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 167 x 111 mm(PCle Board) Product weight: 221 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Anti-static bag
1 x Neutral box

PW7483

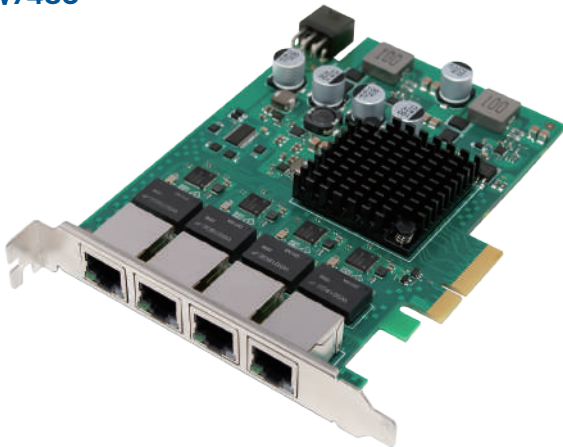


Data Rate: 2.5/1GbE/100/10Mbps

PCle x4 I226-T4 Quad-2.5GbE PoE Frame Grabber NIC

Chipset: Intel I226 + Configuration: 4 x PoE Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 140 x 103 mm(PCle Board) Product weight: 138.3 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Anti-static bag
1 x Neutral box

PW7457

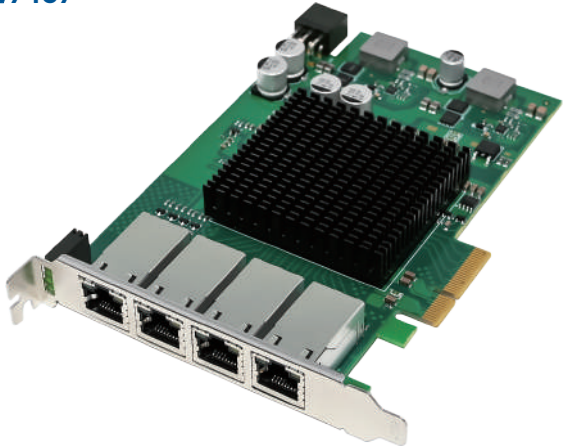

Data Rate: 10/100/1000 Mbps

Built-in Filter

PCle x4 I350AM4 Quad-1GbE PoE+ Frame Grabber NIC

Chipset: Intel NHI350AM4 Configuration: 4 x PoE+ Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 157 x 103 mm(PCle Board) Product weight: 174 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Anti-static bag
1 x Neutral box

PW7458




Data Rate: 10/100/1000 Mbps

with isolation

PCle x4 I350AM4 Quad-1GbE PoE+ Frame Grabber NIC

Chipset: Intel NHI350AM4 Configuration: 4 x PoE+ Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 167 x 111 mm(PCle Board) Product weight: 188.5 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Anti-static bag
1 x Neutral box

PW7246

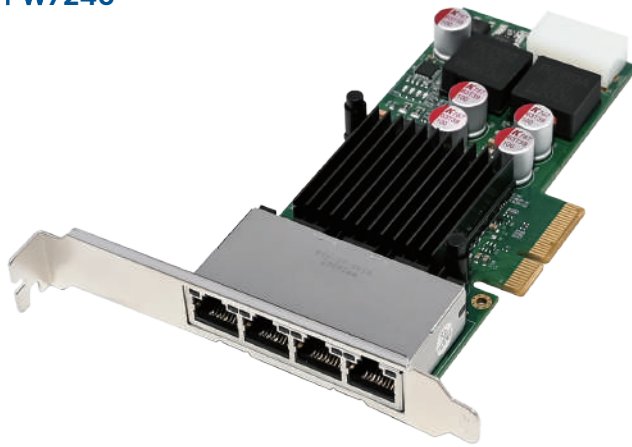


Data Rate: 10/100/1000 Mbps

PCle x4 I350AM4 Quad-1GbE PoE+ Frame Grabber NIC

Chipset: Intel NHI350AM4 Configuration: 4 x PoE+ Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 137 x 65 mm(PCle Board) Product weight: 130 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7456

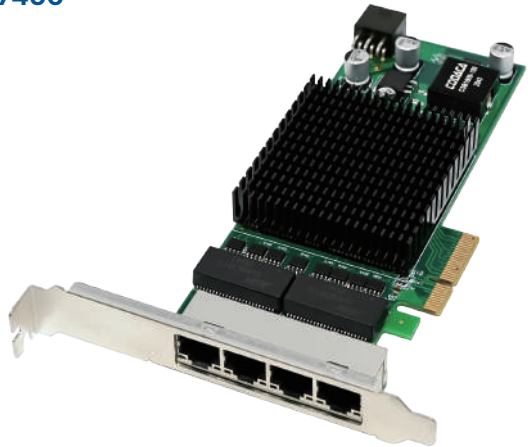

Data Rate: 10/100/1000 Mbps

Surge Protection

PCle x4 I350AM4 Quad-1GbE PoE+ Frame Grabber NIC

Chipset: Intel NHI350AM4 Configuration: 4 x PoE+ Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: x mm(PCle Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW

Product Updates
stay tuned

PCle 3.0 (8 GT/s)

PCle x4 I350AM4 Quad-1GbE PoE+ Frame Grabber NIC

Chipset: Intel NHI350AM4 Configuration: 4 x PoE+ Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 167 x 69 mm(PCle Board) Product weight: 127 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW

Product Updates
stay tuned

PCle 3.0 (8 GT/s)

PCle x4 I350AM4 Eight- 1GbE PoE+ Frame Grabber NIC

Chipset: Intel NHI350AM4*2 + Configuration: 4 x PoE Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 167 x 69 mm(PCle Board) Product weight: 132 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW7298




Data Rate: 10GbE/5GbE/2.5GbE/1GbE/100Mb

PCle x4 X550-T2 Dual-10GbE PoE Frame Grabber NIC

Chipset: Intel X550-AT2 Configuration: 2 x PoE Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 156 x 69 mm(PCle Board) Product weight: 173.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7335

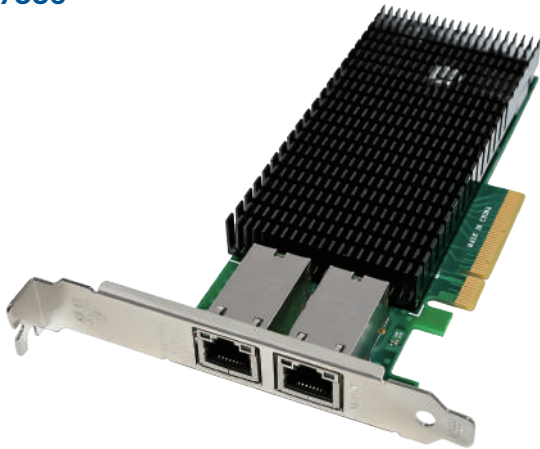

Data Rate: 10GbE/1GbE/100Mb

PCle x8 X540-T2 Dual-10GbE PoE Frame Grabber NIC

Chipset: Intel X540-AT2 Configuration: 2 x PoE Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 156 x 69 mm(PCle Board) Product weight: 178.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7283



Data Rate: 10/100/1000 Mbps

PCle x4 I350-T2 Dual- 1GbE PoE+ Frame Grabber NIC

Chipset: Intel NHI350AM2 Configuration: 2 x PoE+ Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 160 x 69 mm(PCle Board) Product weight: 171.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7231




Data Rate: 10/100/1000 Mbps

PCle x4 82576EB Dual- 1GbE PoE Frame Grabber NIC

Chipset: Intel JL82576EB Configuration: 2 x PoE Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 160 x 69 mm(PCle Board) Product weight: 165.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7481

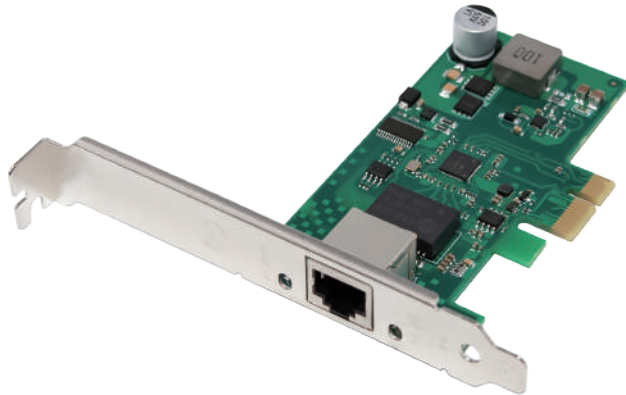


Data Rate: 2.5/1GbE/100/10Mbps

PCle x1 I226-T1 Single-2.5GbE PoE Frame Grabber NIC

Chipset: Intel I226-V Configuration: 1 x PoE Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 97 x 55 mm(PCle Board) Product weight: 58.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7482

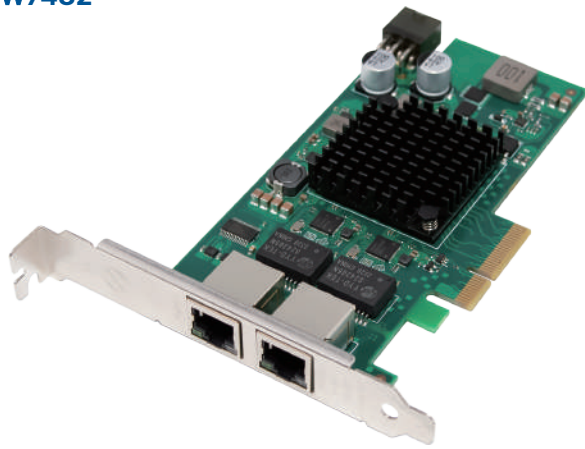


Data Rate: 2.5/1GbE/100/10Mbps

PCle x1 I226-T2 Dual- 2.5GbE PoE Frame Grabber NIC

Chipset: Intel I226-V+ Configuration: 2 x PoE Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 140 x 75 mm(PCle Board) Product weight: 109.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7474

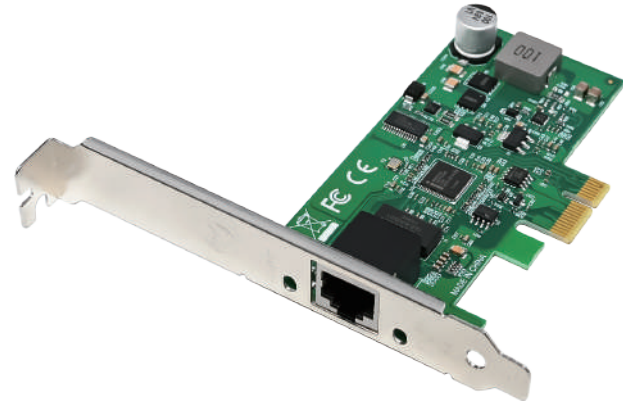

Data Rate: 10/100/1000 Mbps

PCle x1 82574L Single- 1GbE PoE Frame Grabber NIC

Chipset: Intel WG82574L Configuration: 1 x PoE Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: x mm(PCle Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7225



Data Rate: 10/100/1000 Mbps

PCle x1 I210-T1 Single- 1GbE PoE Frame Grabber NIC

Chipset: Intel WGI210AT Configuration: 1 x PoE Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 115 x 69 mm(PCle Board) Product weight: 80.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW

Product Updates stay tuned

Data Rate: 10/100/1000 Mbps

PW

Product Updates stay tuned

Isolator

Data Rate: 2.5/1GbE/100/10Mbps

PCle x4 I210-T2 Dual- 1GbE PoE Frame Grabber NIC

Chipset: Intel WGI210AT+ Configuration: 4 x PoE Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 137 x 65 mm(PCle Board) Product weight: 130 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW

Product Updates stay tuned

Data Rate: 10/100/1000 Mbps

PW

Product Updates stay tuned

Built-in Filter

Data Rate: 10/100/1000 Mbps

with isolation

PCle x4 I210-T4 Quad- 1GbE PoE Frame Grabber NIC

Chipset: Intel WGI210AT+ Configuration: 4 x PoE Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 137 x 65 mm(PCle Board) Product weight: 130 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW

Product Updates stay tuned

Data Rate: 10/100/1000 Mbps

PW

Product Updates stay tuned

Data Rate: 10/100/1000 Mbps

Surge Protection

PCle x4 I350AM4 Quad- 1GbE PoE+ Frame Grabber NIC

Chipset: Intel NHI350AM4 Configuration: 4 x PoE+ Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 137 x 65 mm(PCle Board) Product weight: 130 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PCle x4 I350AM4 Quad- 1GbE PoE+ Frame Grabber NIC

Chipset: Intel NHI350AM4 Configuration: 4 x PoE+ Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: x mm(PCle Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PW

Product Updates stay tuned

PCle 3.0 (8 GT/s)

PW

Product Updates stay tuned

PCle 3.0 (8 GT/s)

PCle x4 I350AM4 Quad- 1GbE PoE+ Frame Grabber NIC

Chipset: Intel NHI350AM4 Configuration: 4 x PoE+ Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 167 x 69 mm(PCle Board) Product weight: 127 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box

PCle x4 I350AM4 Eight- 1GbE PoE+ Frame Grabber NIC

Chipset: Intel NHI350AM4*2 + Configuration: 4 x PoE Copper
Power Voltage: 44-57VDC, maximum power supply of 30W per port
Dimension: 167 x 69 mm(PCle Board) Product weight: 132 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User’s Manual
1 x Neutral box


PW7388



PCIe 4.0 (16 GT/s)

RDMA

PW7389

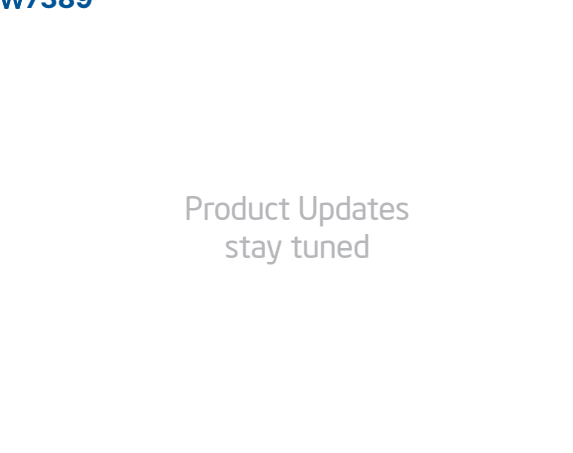

PCIe 4.0 (16 GT/s)

RDMA

Product Updates stay tuned

OCP3.0 E810-CQDA2 Dual-QSFP28 100GbE Server NIC	OCP3.0 E810CQDA1 Single-QSFP28 100GbE Server NIC
Chipset: Intel EZE810CAM2 Configuration: 2 x QSFP28 Port Data Rate Supported: 100/50/25/10GbE Per Port Dimension: 115 x 76 mm (SFF Board) Product weight: 117 g Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Anti-static bag 1 x Neutral box	Chipset: Intel EZE810CAM1 Configuration: 1 x QSFP28 Port Data Rate Supported: 100/50/25/10GbE Per Port Dimension: 115 x 76 mm (SFF Board) Product weight: g Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Anti-static bag 1 x Neutral box

PW7400



PCIe 4.0 (16 GT/s)

RDMA

PW7394



PCIe 4.0 (16 GT/s)

RDMA

Product Updates stay tuned

OCP3.0 E810-XXVDA2 Dual-SFP28 25GbE Server NIC	OCP3.0 E810XXVDA4 Quad-SFP28 25GbE Server NIC
Chipset: Intel EYE810XXVAM2 Configuration: 2 x SFP28 Port Data Rate Supported: 25/10/1GbE Per Port Dimension: 115 x 76 mm (SFF Board) Product weight: 105.7 g Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Anti-static bag 1 x Neutral box	Chipset: Intel EZE810CAM1 Configuration: 4 x SFP28 Port Data Rate Supported: 25/10/1GbE Per Port Dimension: 115 x 76 mm (SFF Board) Product weight: 116.5 g Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Anti-static bag 1 x Neutral box

PW7431



PCIe 3.0 (8 GT/s)

PW7353




PCIe 3.0 (8 GT/s)

Product Updates stay tuned


OCP3.0 X710 Quad-10G SFP+ Ethernet Converged NIC	OCP3.0 X710 Dual-10G SFP+ Ethernet Converged NIC
Chipset: Intel FTXL710-BM1 Configuration: 4 x SFP+ Port Data Rate Supported: 10/1GbE Dimension: 115 x 76 mm (SFF Board) Product weight: 108 g Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Anti-static bag 1 x Neutral box	Chipset: Intel FTX710-BM2 Configuration: 2 x SFP+ Port Data Rate Supported: 10/1GbE Dimension: 115 x 76 mm (SFF Board) Product weight: 101 g Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Anti-static bag 1 x Neutral box

PW7429

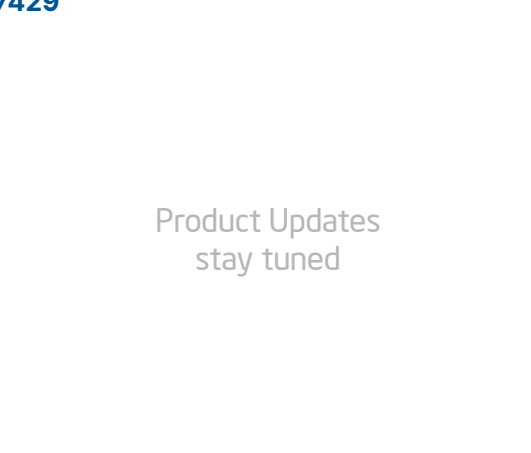

PCIe 3.0 (8 GT/s)

PW7430

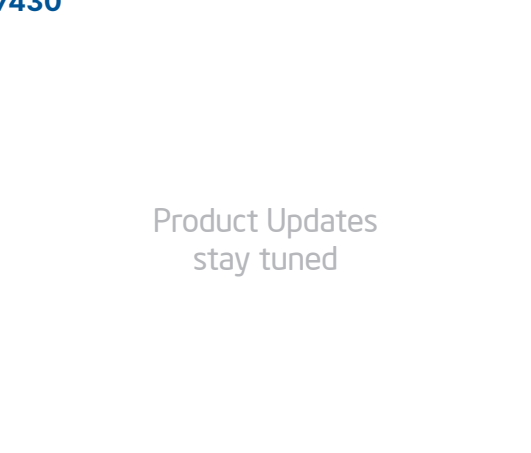

PCIe 3.0 (8 GT/s)

Product Updates stay tuned

OCP3.0 XL710-CQDA2 Dual-QSFP+ 40GbE Server NIC	OCP3.0 QL41xx Quad-SFP+ 10G Converged Server NIC
Chipset: Intel FTXL710-BM2 Configuration: 2 x QSFP+ Port Data Rate Supported: 40/10GbE Per Port Dimension: 115 x 76 mm (SFF Board) Product weight: g Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Anti-static bag 1 x Neutral box	Chipset: Qlogic QL41XX Configuration: 4 x SFP+ Port Data Rate Supported: 10/1GbE Per Port Dimension: 115 x 76 mm (SFF Board) Product weight: 107.1 g Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Anti-static bag 1 x Neutral box

PW7399



PCIe 3.0 (8 GT/s)

OCP3.0 X550-T2 Dual-10G RJ45 Converged Server NIC

Chipset: Intel X550-AT2 Configuration: 2 x RJ45 Port
Data Rate Supported: 10GbE/5GbE/2.5GbE/1GbE/100Mb
Dimension: 115 x 76 mm (SFF Board) Product weight: 99.3 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Anti-static bag
1 x Neutral box

PW7398



PCIe 2.1 (5 GT/s)

OCP3.0 X540-T2 Dual-10G RJ45 Converged Server NIC

Chipset: Intel X540-AT2 Configuration: 2 x RJ45 Port
Data Rate Supported: 10GbE/1GbE/100Mb
Dimension: 115 x 76 mm (SFF Board) Product weight: 99.3 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Anti-static bag
1 x Neutral box

PW7428




PCIe 3.0 (8 GT/s)

OCP3.0 X710T2L Dual-10G RJ45 Converged Server NIC

Chipset: Intel X710-AT2 Configuration: 2 x RJ45 Port
Data Rate Supported: 10GbE/5GbE/2.5GbE/1GbE/100Mb
Dimension: 115 x 76 mm (SFF Board) Product weight: 103.6 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Anti-static bag
1 x Neutral box

PW

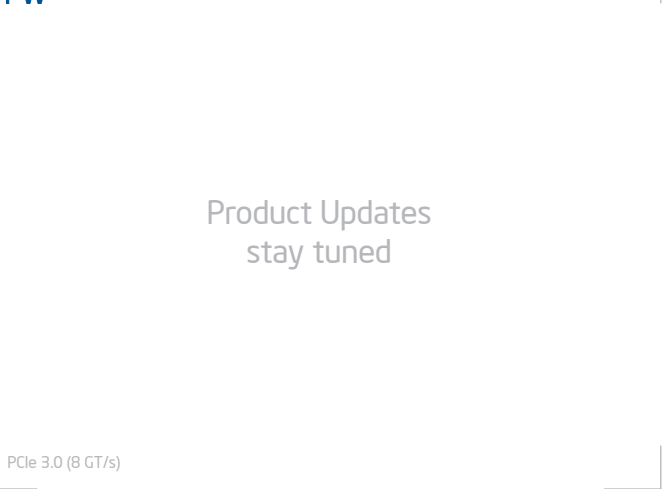


PCIe 3.0 (8 GT/s)

OCP3.0 X710-T4 Quad-10G RJ45 Converged Server NIC

Chipset: Intel X710-AM4 Configuration: 2 x RJ45 Port
Data Rate Supported: 10GbE/5GbE/2.5GbE/1GbE/100Mb
Dimension: 115 x 76 mm (SFF Board) Product weight: 116.5 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Anti-static bag
1 x Neutral box

PW7432

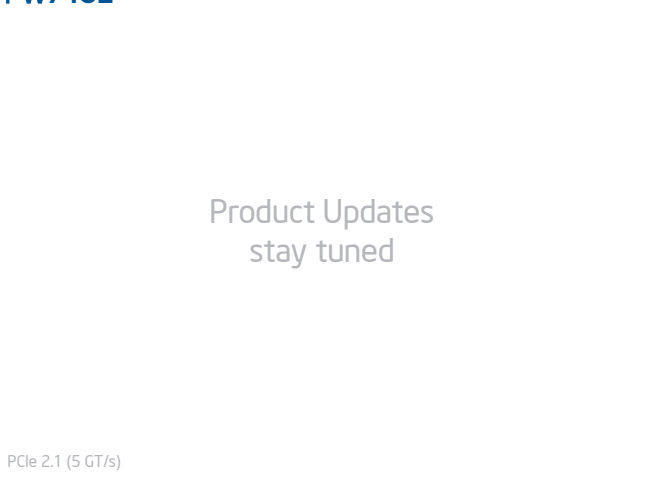


PCIe 2.1 (5 GT/s)

OCP3.0 I350F4 Quad-SFP Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM4 Configuration: 4 x SFP Port
Data Rate Supported: 1GbE
Dimension: 115 x 76 mm (SFF Board) Product weight: 101.8 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Anti-static bag
1 x Neutral box

PW7402

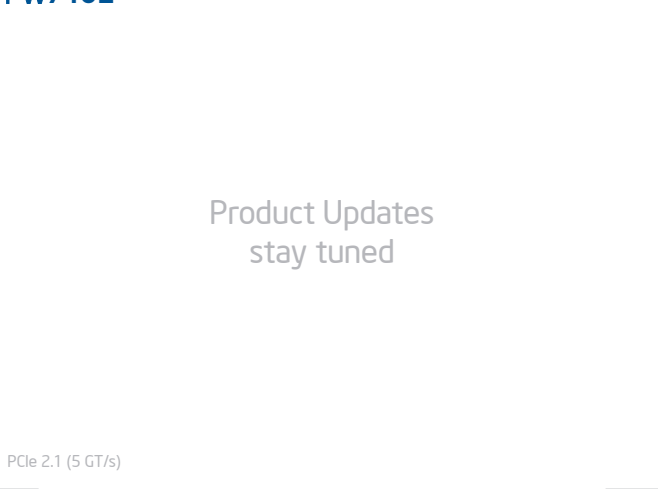

PCIe 2.1 (5 GT/s)

OCP3.0 5720 Quad-RJ45 Gigabit Ethernet Server NIC

Chipset: Broadcom BCM5720 Configuration: 4 x RJ45 Port
Data Rate Supported: 1000/100/10Mbps
Dimension: 115 x 76 mm (SFF Board) Product weight: 107.1 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Anti-static bag
1 x Neutral box

PW7397




PCIe 2.1 (5 GT/s)

OCP3.0 I350T4 Quad-RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM4 Configuration: 4 x RJ45 Port
Data Rate Supported: 1000/100/10Mbps
Dimension: 115 x 76 mm (SFF Board) Product weight: 101.8 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Anti-static bag
1 x Neutral box

PW7403

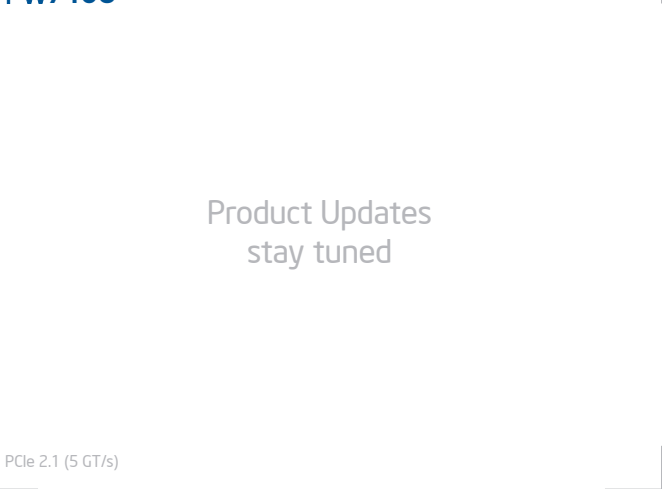

PCIe 2.1 (5 GT/s)

OCP3.0 5719 Quad-RJ45 Gigabit Ethernet Server NIC

Chipset: Broadcom BCM5719 Configuration: 4 x RJ45 Port
Data Rate Supported: 1000/100/10Mbps
Dimension: 115 x 76 mm (SFF Board) Product weight: 107.1 g
Accessories: 1 x CD-Driver, 1 x User’s Manual, 1 x Anti-static bag
1 x Neutral box

PW7396



PW7514

Product Updates
stay tuned

PCIe 3.0 (8 GT/s)

PCIe 2.1 (5 GT/s)

OCP3.0 I350T2 Dual- RJ45 Gigabit Ethernet Server NIC

Chipset: Intel NHI350AM2

Configuration: 2 x RJ45 Port

Data Rate Supported: 1000/100/10Mbps

Dimension: 115 x 76 mm (SFF Board)

Product weight: 98 g

Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Anti-static bag

1 x Neutral box

OCP3.0 5720 Dual- RJ45 Gigabit Ethernet Server NIC

Chipset: Broadcom BCM5720

Configuration: 2 x RJ45 Port

Data Rate Supported: 1000/100/10Mbps

Dimension: 115 x 76 mm (SFF Board)

Product weight: 99.3 g

Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Anti-static bag


1 x Neutral box

PW7345



PCIe 3.0 (8 GT/s)

PW7347

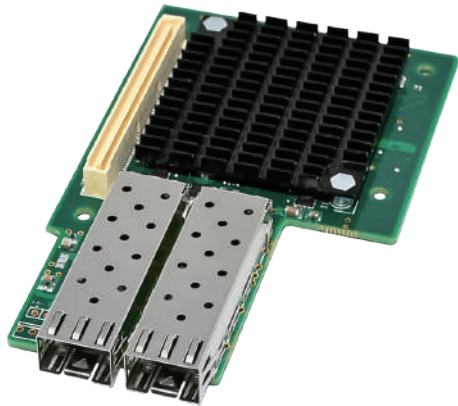

PCIe 3.0 (8 GT/s)

OCP2.0 ConnectX-4 Single- 25GbE SFP28 Server NIC

Chipset: Mellanox ConnectX-4

Configuration: 1 x SFP28 Port

Data Rate Supported: 25/10/1GbE

Dimension: 110 x 68 mm (TFF Board)

Product weight: 51.5 g

Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Anti-static bag

1 x Neutral box

OCP2.0 ConnectX-4 LX Dual- 10GbE SFP28 Server NIC

Chipset: Mellanox ConnectX-4

Configuration: 2 x SFP28 Port

Data Rate Supported: 10/1GbE

Dimension: 110 x 68 mm (TFF Board)

Product weight: 56 g

Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Anti-static bag

1 x Neutral box

PW7343



PCIe 3.0 (8 GT/s)

PW7344



PCIe 3.0 (8 GT/s)

OCP2.0 ConnectX-3 Dual- 40GbE QSFP+ Server NIC

Chipset: Mellanox ConnectX-3

Configuration: 2 x QSFP+ Port

Data Rate Supported: 25/10/1GbE

Dimension: 110 x 68 mm (TFF Board)

Product weight: 62.5 g

Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Anti-static bag

1 x Neutral box

OCP2.0 ConnectX-3 Dual- 10GbE SFP+ Server NIC

Chipset: Mellanox ConnectX-3

Configuration: 2 x SFP+ Port

Data Rate Supported: 10/1GbE

Dimension: 110 x 68 mm (TFF Board)

Product weight: 53.8 g

Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Anti-static bag


1 x Neutral box

PW7346



PCIe 3.0 (8 GT/s)

PW7348

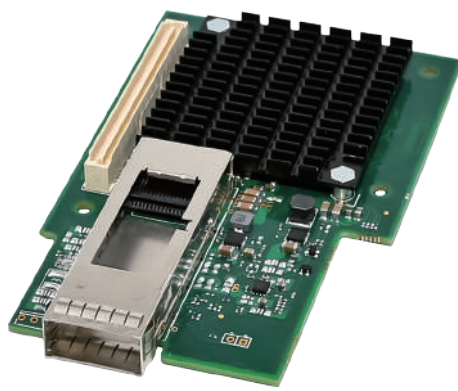

PCIe 3.0 (8 GT/s)

OCP2.0 ConnectX-4 LX Dual- 25GbE SFP28 Server NIC

Chipset: Mellanox ConnectX-4

Configuration: 2 x SFP28 Port

Data Rate Supported: 25/10/1GbE

Dimension: 110 x 68 mm (TFF Board)

Product weight: 53.6 g

Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Anti-static bag

1 x Neutral box

OCP2.0 ConnectX-4 LX Single-50G QSFP28 Server NIC

Chipset: Mellanox ConnectX-4

Configuration: 1 x QSFP28 Port

Data Rate Supported: 50/40/25/10/1GbE

Dimension: 110 x 68 mm (TFF Board)

Product weight: 57.6 g

Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Anti-static bag

1 x Neutral box

PW709



USB cable length: 20cm

Drive-free

USB3.0 to SFP RTL8153 Gigabit Ethernet Fiber Adapter

Chipset: Realtek RTL8153	Upstream: USB3.0 AF Port
Transmission Rate: 1000Mbps	Downstream: SFP Port
Dimension: L70 x W45 x H18 mm	Product weight: 45 g
Accessories: 1 x Anti-static bag, 1 x Neutral box	

PW710



USB cable length: 20cm

Drive-free

TYPE-C to SFP RTL8153 Gigabit Ethernet Fiber Adapter

Chipset: Realtek RTL8153	Upstream: USB TYPE-C Port
Transmission Rate: 1000Mbps	Downstream: SFP Port
Dimension: L70 x W45 x H18 mm	Product weight: 45 g
Accessories: 1 x Anti-static bag, 1 x Neutral box	

PW716



USB cable length: 20cm

Drive-free

USB-C to SFP AX88772C Fast Ethernet Fiber Adapter

Chipset: ASIX AX88772C	Upstream: USB TYPE-C Port
Transmission Rate: 100Mbps	Downstream: SFP Port
Dimension: L70 x W45 x H18 mm	Product weight: 43 g
Accessories: 1 x Anti-static bag, 1 x Neutral box	

PW717



USB cable length: 20cm

Drive-free

USB-A to SFP AX88772C Fast Ethernet Fiber Adapter

Chipset: ASIX AX88772C	Upstream: USB TYPE-A Port
Transmission Rate: 100Mbps	Downstream: SFP Port
Dimension: L70 x W45 x H18 mm	Product weight: 43 g
Accessories: 1 x Anti-static bag, 1 x Neutral box	

PW7293



USB-C/A Cable: CM

TYPE-A/C SFP RTL8153 Gigabit Ethernet Fiber Adapter

Chipset: Realtek RTL8153	Upstream: USB TYPE-A/C Port
Transmission Rate: 1000Mbps	Downstream: SFP Port
Dimension: L87 x W37 x H20 mm	Product weight: 76.8 g
Accessories: 1 x Anti-static bag, 1 x Neutral box	

PW739



10GbE Fiber Transceiver: 10GBASE-TX to 10GBASE-FX

Chipset: Marvell 88X3310	Configuration: 1 x SFP+ / RJ45 Port
SFP+ Data Rate: 10Gbps(550m~100km)	Input Voltage: DC12V
RJ45 Data Rate: 10Gbps(100m UTP CAT6-A)	Power: 0.75W~3W
Dimension: L118 x W85 x H26 mm	Product weight: 288 g
Accessories: 1 x Anti-static bag, 1 x Power supply, 1 x Neutral box	

PW801



PCIe 3.0 (8 GT/s)

88E1111 Gigabit Optoelectronic Module Transceiver

Chipset: Marvell 88E1111	Configuration: 1 x SFP/RJ45 Port
SerDes interface: Built-in 1.25Gbps for 1000BASE-X Fiber	
Dimension: L68 x W13 x H15 mm	Product weight: 23.5 g
Accessories: 1 x Anti-static bag, 1 x Neutral box	

PW802



PCIe 3.0 (8 GT/s)

AQR113 10 Gigabit Optoelectronic Module Transceiver

Chipset: Marvell AQR113C	Configuration: 1 x SFP+/RJ45 Port
Network rate : 10G/5G/2.5G/1GBASE-T/100BASE-TX/10BASE-TE	
Dimension: L68 x W13 x H15 mm	Product weight: 23.5 g
Accessories: 1 x Anti-static bag, 1 x Neutral box	

PW731



USB cable length: 18.5 cm

USB3.0 RTL8156B 2.5G RJ45 Gigabit Ethernet Adapter

Chipset: Realtek RTL8156B Upstream: USB3.0 AF Port
Transmission Rate: 2.5G/1000/100/10Mbps Downstream: RJ45 Port
Dimension: L60 x W23 x H16 mm Product weight: 26.8 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW732



USB cable length: 18.5 cm

TYPE-C RTL8156B 2.5G RJ45 Gigabit Ethernet Adapter

Chipset: Realtek RTL8156B Upstream: USB TYPE-C Port
Transmission Rate: 2.5G/1000/100/10Mbps Downstream: RJ45 Port
Dimension: L60 x W23 x H16 mm Product weight: 26.8 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW7501



USB cable length: 18.5 cm

USB 3.0 AF to RJ45 AX88179 Gigabit Ethernet Adapter

Chipset: ASIX AX88179 Upstream: USB3.0 AF Port
Transmission Rate: 1000/100/10Mbps Downstream: RJ45 Port
Dimension: L60 x W23 x H16 mm Product weight: 27.4 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW7502



USB cable length: 18.5 cm

USB TYPE-C to RJ45 AX88179 Gigabit Ethernet Adapter

Chipset: ASIX AX88179 Upstream: USB TYPE-C Port
Transmission Rate: 1000/100/10Mbps Downstream: RJ45 Port
Dimension: L60 x W23 x H16 mm Product weight: 24.6 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW7490



USB cable length: 50 cm

USB 3.0 Dual- RJ45 AX88179 Gigabit Ethernet Adapter

Chipset: ASIX AX88179 + VL820 Upstream: USB3.0 TYPE-B Port
Transmission Rate: 1000/100/10Mbps Downstream: 2 x RJ45 Port
Dimension: L73 x W70 x H25 mm Product weight: 130 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box
1 x USB3.0 TYPE-B Cable (USB 10Gbps)

PW7491



USB cable length: 50 cm

USB3.0 Quad-RJ45 RTL8153B Gigabit Ethernet Adapter

Chipset: Realtek RTL8153B+VL820 Upstream: USB3.0 TYPE-B Port
Transmission Rate: 1000/100/10Mbps Downstream: 4 x RJ45 Port
Dimension: L73 x W70 x H25 mm Product weight: 145.8 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box
1 x USB3.0 TYPE-B Cable (USB 10Gbps)

PW736



USB cable length: 18.5 cm

USB TYPE-C to RJ45 AX88179 Gigabit Ethernet Adapter

Chipset: ASIX AX88179 Upstream: USB TYPE-C Port
Transmission Rate: 1000/100/10Mbps Downstream: RJ45 Port
Dimension: L60 x W23 x H16 mm Product weight: 23.4 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW737



USB cable length: 18.5 cm

OCP3.0 5719 Quad- RJ45 Gigabit Ethernet Server NIC

Chipset: ASIX AX88179 Upstream: USB TYPE-C Port
Transmission Rate: 1000/100/10Mbps Downstream: RJ45 Port
Dimension: L60 x W23 x H16 mm Product weight: 25 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW7410



Thunderbolt 3 Cable: 50cm

PW7461



Thunderbolt 3 Cable: 50CM

Thunderbolt 3 AQC107 10GBASE-T Ethernet Server NIC

Chipset: Intel JHL6340 + AQC107 Configuration: 1 x RJ45 Port
Bus Width: 40Gbps Network rate: 10G/5G/2.5G/1G/100M
Dimension: L132 x W53 x H21 mm Product weight: 195.6 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box
1 x Thunderbolt 3 Cable

Thunderbolt 3 AQC113 10GBASE-T Ethernet Server NIC

Chipset: Intel JHL6340 + AQC113 Configuration: 1 x RJ45 Port
Bus Width: 40Gbps Network rate: 10G/5G/2.5G/1G/100M/10M
Dimension: L132 x W53 x H21 mm Product weight: 195.6 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box
1 x Thunderbolt 3 Cable

PW7411



Thunderbolt 3 Cable: 50cm

PW5109



Thunderbolt 3 Cable: 50cm

Thunderbolt 3 X520-DA1 10GbE SFP+ Fiber Server NIC

Chipset: Intel JHL6340 + 82599EN Configuration: 1 x SFP+ Port
Bus Width: 40Gbps Data Rate Per Port: 10/1GbE
Dimension: L105 x W61 x H18 mm Product weight: 137.5 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box
1 x Thunderbolt 3 Cable

Thunderbolt 3 TO NVMe SSD Storage Box Adapter2280

Chipset: JHL6340 + TPS65983BA Interface: 1 x M.2 NVMe
Bus Width: Maximum transmission rate of 40Gbps
Dimension: L100 x W40 x H15 mm Product weight: 87.8 g
Accessories: 1 x Thunderbolt 3 Cable, 1 x Anti-static bag
1 x Neutral box

PW7463



USB 4 Cable: 50CM

PW

Product Updates
stay tuned

PCIe 3.0 (8 GT/s)

USB4/TBT4 TO AQC107 10GBASE-T Ethernet Server NIC

Chipset: ASM3464 + AQC107 Configuration: 1 x RJ45 Port
Bus Width: 40Gbps Network rate: 10G/5G/2.5G/1G/100M
Dimension: L132 x W53 x H21 mm Product weight: 193.5 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box
1 x USB 4 Cable

USB4/TBT4 TO AQC113 10GBASE-T Ethernet Server NIC

Chipset: ASM3464 + AQC113 Configuration: 1 x RJ45 Port
Bus Width: 40Gbps Network rate: 10G/5G/2.5G/1G/100M/10M
Dimension: L132 x W53 x H21 mm Product weight: 193.5 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box
1 x USB 4 Cable

PW5115



USB 4 Cable: 50cm

PW7464



USB 4 Cable: 50cm

USB4/TBT4 ASM2464 NVMe SSD Storage Box Adapter

Chipset: ASMeida ASM2464 Interface: 1 x M.2 NVMe
Bus Width: Maximum transmission rate of 40Gbps
Dimension: L87 x W37 x H20 mm Product weight: 90.7 g
Accessories: 1 x USB 4 Cable, 1 x Anti-static bag, 1 x Neutral box

USB4/TBT4 TO X520-DA1 10GbE SFP+ Fiber Server NIC

Chipset: ASM2464 + 82599EN Configuration: 1 x SFP+ Port
Bus Width: 40Gbps Data Rate Per Port: 10/1GbE
Dimension: L105 x W61 x H18 mm Product weight: 137.5 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box
1 x USB 4 Cable

PW695



PCIe x16 ASM3242 8 x USB3.2-C Camera Capture Card

Chipset: ASM3242 + PEX8747 Interface: 8 x USB3.2 TYPE-C
Data rate per port: Up to 20Gbps
Power supply: Built-in ATX 6pin power connector
Dimension: 128 x 110 mm(PCIe Board) Product weight: 263.7 g
Accessories: 1 x Anti-static bag, 1 x Neutral box

PW694



PCIe x16 ASM3142 8 x USB3.1-C Camera Capture Card

Chipset: ASM3142 + PEX8747 Interface: 8 x USB3.1 TYPE-C
Data rate per port: Up to USB3.1 Gen-II 10Gbps
Power supply: Built-in ATX 6pin power connector
Dimension: 128 x 110 mm(PCIe Board) Product weight: 251.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW691



PCIe x16 ASM3242 4 x USB3.2-C Camera Capture Card

Chipset: ASM3242 + PEX8747 Interface: 4 x USB3.2 TYPE-C
Data rate per port: Up to 20Gbps
Power supply: Built-in ATX 6pin power connector
Dimension: 143 x 69 mm(PCIe Board) Product weight: 182.8 g
Accessories: 1 x Low profile bracket, 1 x Anti-static bag, 1 x Neutral box

PW693



PCIe x8 ASM3142 4 x USB 3.1-C Camera Capture Card

Chipset: ASM3142 + PEX8747 Interface: 4 x USB3.1 TYPE-C
Data rate per port: Up to USB3.1 Gen-II 10Gbps
Power supply: Built-in ATX 6pin power connector
Dimension: 143 x 69 mm(PCIe Board) Product weight: 177 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW680



PCIe x4 ASM3242 USB 3.2-C 20Gbps Expansion Card

Chipset: ASMedia ASM3242 Interface: 1 x USB3.2 TYPE-C
Data rate per port: Up to 20Gbps
Power supply: Self-powered
Dimension: 79 x 51 mm(PCIe Board) Product weight: 30.8 g
Accessories: 1 x Low profile bracket, 1 x Anti-static bag, 1 x Neutral box

PW690



PCIe x16 ASM3242 2 x USB3.2-C Camera Capture Card

Chipset: ASM3242 + PEX8747 Interface: 2 x USB3.2 TYPE-C
Data rate per port: Up to 20Gbps
Power supply: Built-in ATX 6pin power connector
Dimension: 143 x 69 mm(PCIe Board) Product weight: 180.9 g
Accessories: 1 x Low profile bracket, 1 x Anti-static bag, 1 x Neutral box

PW647



PCIe x4 ASM3142 USB3.1 TYPE-A Camera Capture Card

Chipset: ASM3142 + ASM2806 Interface: 4 x USB3.1 TYPE-A
Data rate per port: Up to USB3.1 Gen-II 10Gbps
Power supply: Built-in SATA-15pin power connector
Dimension: 100 x 85 mm(PCIe Board) Product weight: 182.8 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box


PW648



PCIe x4 ASM3142 USB 3.1 2A2C Camera Capture Card

Chipset: ASM3142 + ASM2812 Interface: 2 x USB3.1 TYPE-A
Data rate per port: Up to 10Gbps 2 x USB3.1 TYPE-C
Power supply: Built-in SATA-15pin power connector
Dimension: 100 x 85 mm(PCIe Board) Product weight: 76 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box


PW638

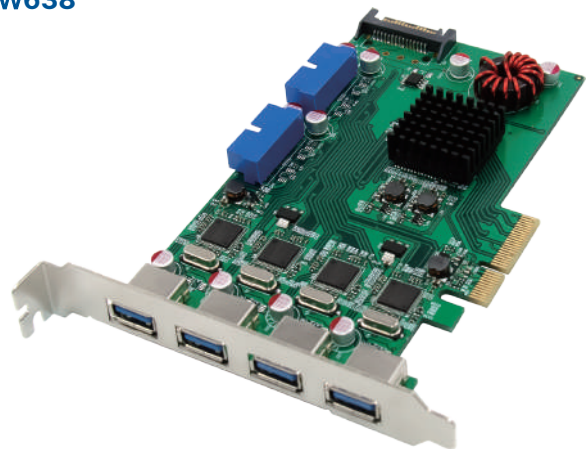

PCIe x4 ASM1042A 4CH USB3.0 Camera Capture Card

Chipset: ASM1042A + PI7C9X2G608P Interface: 4 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps 2 x 19pin USB3.0 Front port
Power supply: Built-in SATA-15pin power connector
Dimension: 143 x 86 mm(PCIe Board) Product weight: 84.5 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box


PW665

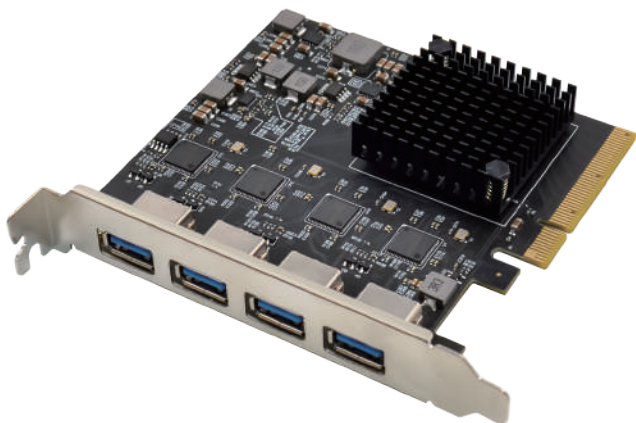

PCIe x8 ASM3142 4CH USB3.1-A Camera Capture Card

Chipset: ASM3142 + PEX8747 Interface: 4 x USB3.1 TYPE-A
Data rate per port: Up to USB3.1 Gen-II 10Gbps
Power supply: Self-powered
Dimension: 95 x 104 mm(PCIe Board) Product weight: 89.8 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box


PW660

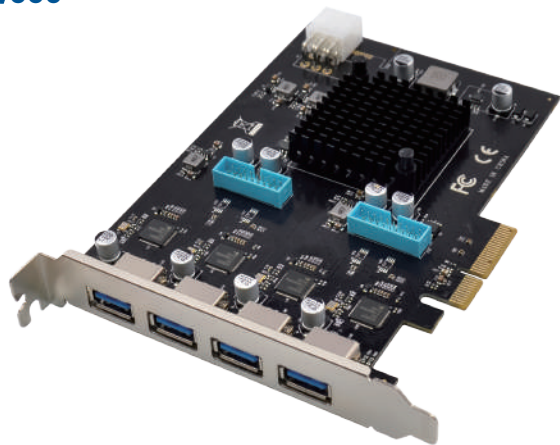

PCIe x4 NEC720201 4CH USB3.0 Camera Capture Card

Chipset: D720201 + ASM2806 Interface: 4 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps 2 x 19pin USB3.0 Front port
Power supply: Built-in ATX 6pin power connector
Dimension: 141 x 104 mm(PCIe Board) Product weight: 104 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW669

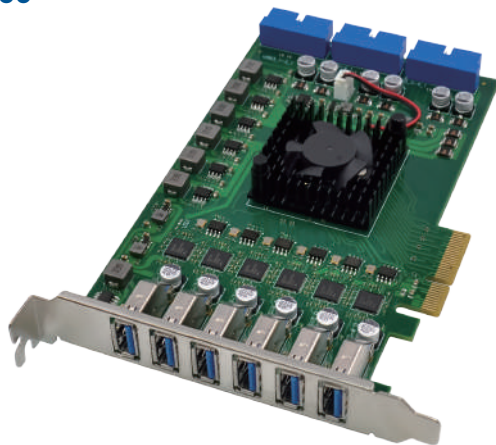

PCIe x4 NEC720202 6CH USB3.0 Camera Capture Card

Chipset: D720202+ ASM1812 Interface: 6 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps 3 x 19pin USB3.0 Front port
Power supply: Self-powered
Dimension: 155 x 98 mm(PCIe Board) Product weight: 127.3 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW658



PCIe x4 ASM3142 USB3.1 TYPE-A Camera Capture Card

Chipset: ASM3142 + ASM2812 Interface: 4 x USB3.1 TYPE-A
Data rate per port: Up to USB3.1 Gen-II 10Gbps
Power supply: Self-powered
Dimension: 160 x 67 mm(PCIe Board) Product weight: 92.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW616



PCIe x4 NEC720202 4CH USB3.0 Camera Capture Card

Chipset: D720202 + PI7C9X2G608P Interface: 4 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps
Power supply: Built-in D-4pin & SATA-15pin power connector
Dimension: 167 x 69 mm(PCIe Board) Product weight: 82.8 g
Accessories: 1 x Low profile bracket, 1 x Anti-static bag, 1 x Neutral box


PW668

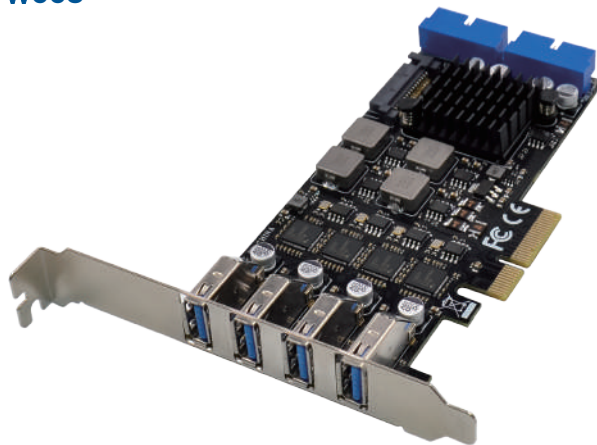

PCIe x4 NEC720201 4CH USB3.0 Camera Capture Card

Chipset: D720201 + ASM2806 Interface: 4 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps 2 x 19pin USB3.0 Front port
Power supply: Built-in SATA-15pin power connector
Dimension: 135 x 67 mm(PCIe Board) Product weight: 83.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW676

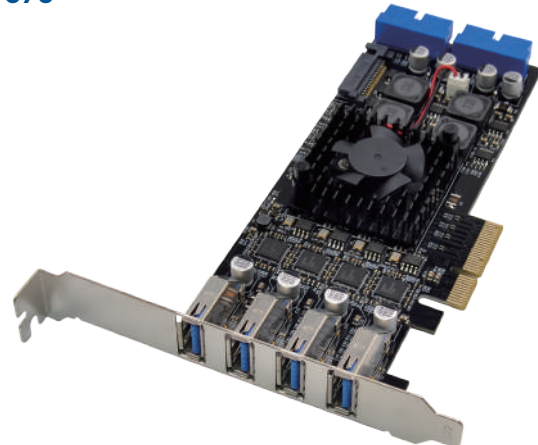

PCIe x4 NEC720202 4CH USB3.0 Camera Capture Card

Chipset: D720202+ ASM1812 Interface: 4 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps 2 x 19pin USB3.0 Front port
Power supply: Built-in SATA-15pin power connector
Dimension: 155 x 67 mm(PCIe Board) Product weight: 105.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW6103

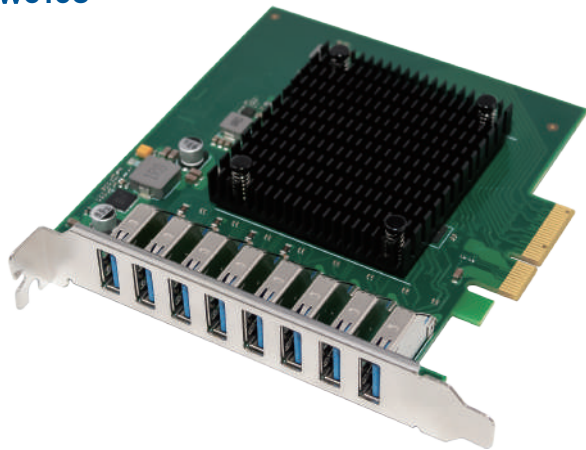

PCIe x4 FL1100 8-USB3.0 TYPE-A Camera Capture Card

Chipset: FL1100 + PI7C9X2G608P Interface: 8 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps
Power supply: Self-powered
Dimension: 117 x 111 mm(PCIe Board) Product weight: 84.5 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW626

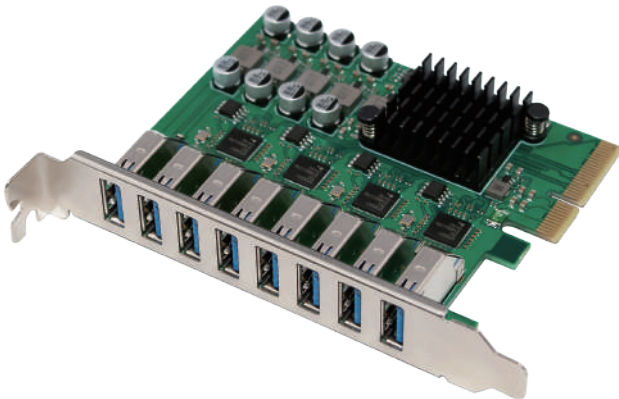


PCIe x4 NEC720201 8- USB3.0 A Camera Capture Card

Chipset: D720201 + ASM2806 Interface: 8 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps
Power supply: Self-powered
Dimension: 79 x 97 mm(PCIe Board) Product weight: 84.6 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW6108

Product Updates
stay tuned

PW613

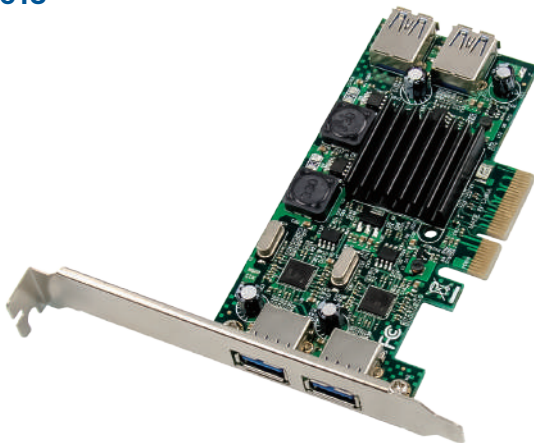


PCIe x4 ASM3242 USB 3.2 2A1C Camera Capture Card

Chipset: ASM3242 + Interface: 2 x USB3.2 TYPE-A
Data rate per port: Up to 20Gbps 1 x USB3.2 TYPE-C
Power supply: Self-powered
Dimension: 79 x 66 mm(PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x Anti-static bag, 1 x Neutral box

PCIe x4 NEC720202 USB3.0 2+2 Camera Capture Card

Chipset: D720202+ ASM1806 Interface: 2 x Built-in USB3.0
Data rate per port: Up to 5Gbps 2 x External USB3.0
Power supply: Self-powered
Dimension: 115 x 60 mm(PCIe Board) Product weight: 63.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW6101

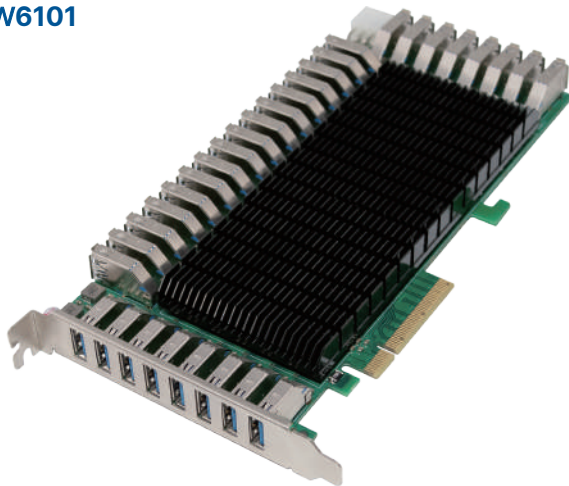

PCIe x8 NEC720201 32 * USB3.0 Camera Capture Card

Chipset: D720201 + ASM1806 Interface: 24 x Built-in USB3.0
Data rate per port: Up to 5Gbps 6 x External USB3.0
Power supply: Built-in ATX 6pin power connector
Dimension: 216 x 106 mm(PCIe Board) Product weight: 358.6 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box


PW686



PCIe x4 ASM3042 4CH USB 3.2 5Gbps Expansion Card

Chipset: D720202 + PI7C9X2G608P Interface: 4 x USB3.2 TYPE-A
Data rate per port: Up to 5Gbps (USB3.2 Gen1 x1)
Power supply: Built-in SATA-15pin power connector
Dimension: 148 x 67 mm(PCIe Board) Product weight: 81.6 g
Accessories: 1 x Low profile bracket, 1 x Anti-static bag, 1 x Neutral box


PW657

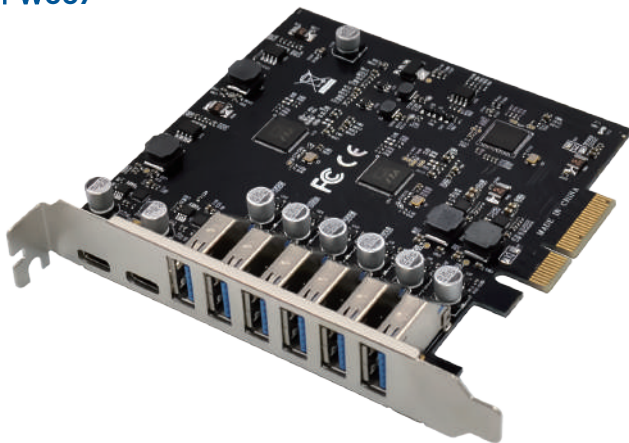

PCIe x4 ASM3142 USB3.1 6A2C 10Gbps Expansion Card

Chipset: ASM3142 + VL820 Interface: 6 x USB3.1 TYPE-A
Data rate per port: Up to 10Gbps 2 x USB3.0 TYPE-C
Power supply: Self-powered
Dimension: 105 x 108 mm(PCIe Board) Product weight: 85.9 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW682

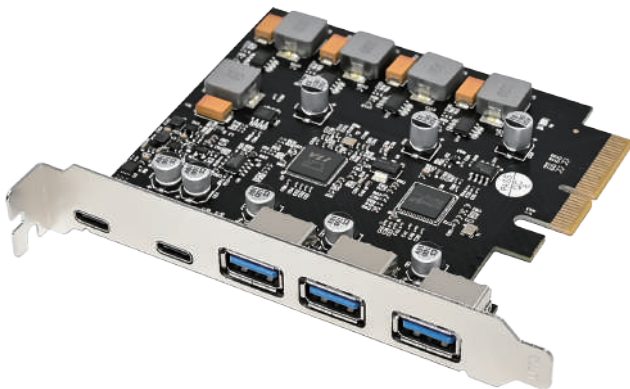

PCIe x4 ASM3142 USB3.1 3A2C 10Gbps Expansion Card

Chipset: ASM3142 + VL820 Interface: 3 x USB3.1 TYPE-A
Data rate per port: Up to 10Gbps 2 x USB3.0 TYPE-C
Power supply: Self-powered
Dimension: 86 x 98 mm(PCIe Board) Product weight: 70 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW688



USB TYPE-C port supports PD3.0 charge function max 30W

PW689



USB TYPE-C port supports PD3.0 charge function max 30W


PCIe x4 ASM3142 USB3.1 A+C & PD3.0 Expansion Card

Chipset: ASMedia ASM3142 Interface: 1 x USB3.1 TYPE-A
Data rate per port: Up to 10Gbps 1 x USB3.1 TYPE-C
Power supply: Built-in ATX 6pin power connector
Dimension: 90 x 69 mm(PCIe Board) Product weight: 48.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PCIe x1 VL805 USB 3.0 2A1C & PD3.0 Expansion Card

Chipset: ASMedia ASM3142 Interface: 2 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps 1 x USB3.0 TYPE-C
Power supply: Built-in ATX 6pin power connector
Dimension: 90 x 69 mm(PCIe Board) Product weight: 56.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW637

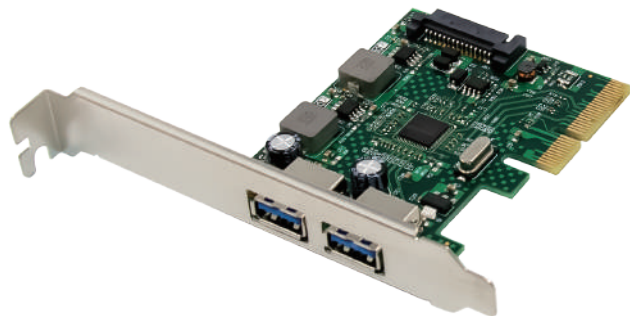

PW639

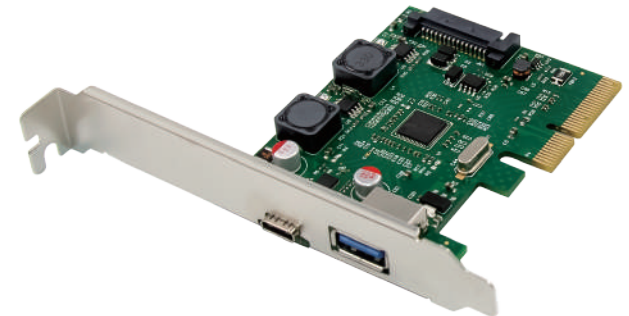

PCIe x4 ASM3142 USB 3.1 2A 10Gbps Expansion Card

Chipset: ASMedia ASM3142 Interface: 2 x USB3.1 TYPE-A
Data rate per port: Up to USB3.1 Gen-II 10Gbps
Power supply: Self-powered
Dimension: 80 x 63 mm(PCIe Board) Product weight: 44.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PCIe x4 ASM3142 USB3.1-C&A 10Gbps Expansion Card

Chipset: ASMedia ASM3142 Interface: 1 x USB3.1 TYPE-A
Data rate per port: Up to 10Gbps 1 x USB3.1 TYPE-C
Power supply: Self-powered
Dimension: 80 x 63 mm(PCIe Board) Product weight: 42.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW6105

Product Updates
stay tuned

PW659

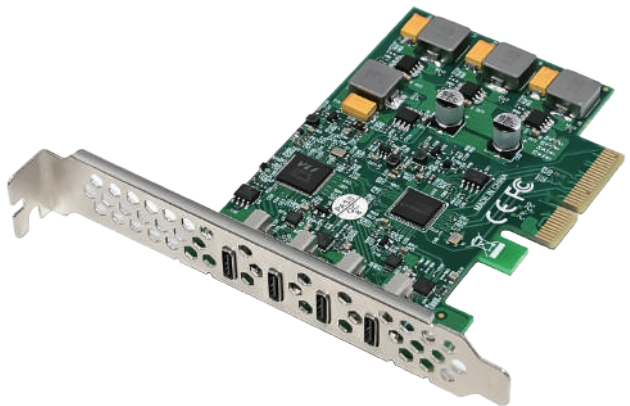

PCIe x1 FL1100 USB3.0 TYPE-C 5Gbps Expansion Card

Chipset: Fresco Logic FL1100 Interface: 2 x USB3.0 TYPE-C
Data rate per port: Support 5Gbps Full speed transmission
Power supply: Self-powered
Dimension: 216 x 106 mm(PCIe Board) Product weight: 358.6 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PCIe X4 ASM3142 USB3.1 4C 10Gbps Expansion Card

Chipset: ASM3142 + VL820 Interface: 4 x USB3.1 TYPE-C
Data rate per port: Up to 10Gbps Power supply: Self-powered
Dimension: 98 x 69 mm(PCIe Board) Product weight: 59.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box

PW6106

Product Updates
stay tuned

PW6107

Product Updates
stay tuned


PCIe x4 FL1100 USB 3.0 TYPE-C+A 5G Expansion Card

Chipset: Fresco Logic FL1100 Interface: 1 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps 1 x USB3.0 TYPE-C
Power supply: Self-powered
Dimension: 65 x 64 mm(PCIe Board) Product weight: 37.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PCIe x4 FL1100 USB3.0 TYPE-A 5Gbps Expansion Card

Chipset: Fresco Logic FL1100 Interface: 2 x USB3.0 TYPE-A
Data rate per port: Support 5Gbps Full speed transmission
Power supply: Self-powered
Dimension: 65 x 64 mm(PCIe Board) Product weight: 37.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW653

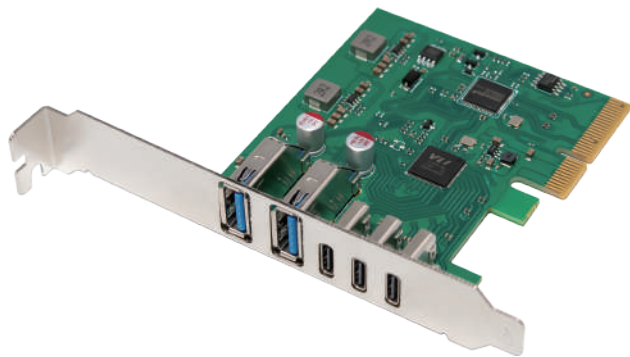

PW654

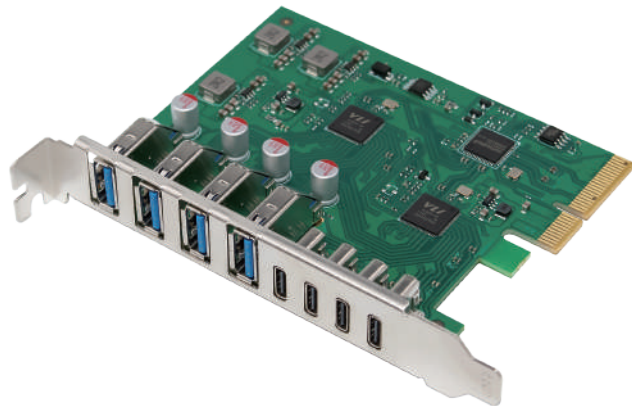


PCIe x4 ASM3142 USB3.1 2A3C 10Gbps Expansion Card PCIe x4 ASM3142 USB3.1 4A4C 10Gbps Expansion Card


Chipset: ASM3142 + VL820 Interface: 2 x USB3.1 TYPE-A
Data rate per port: Up to 10Gbps 3 x USB3.1 TYPE-C
Power supply: Self-powered
Dimension: 79 x 69 mm(PCIe Board) Product weight: 50.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

Chipset: ASM3142 + VL820 Interface: 4 x USB3.1 TYPE-A
Data rate per port: Up to 10Gbps 4 x USB3.1 TYPE-C
Power supply: Self-powered
Dimension: 79 x 100 mm(PCIe Board) Product weight: 69.7 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW632

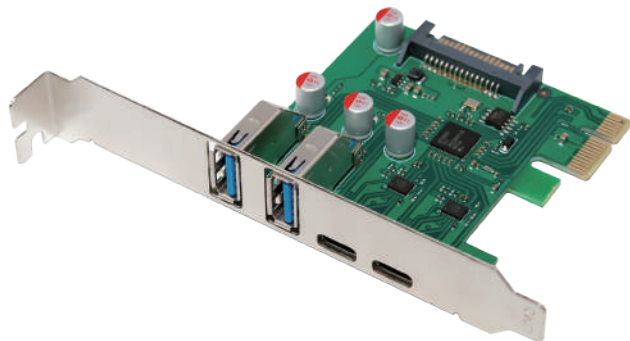

PW697

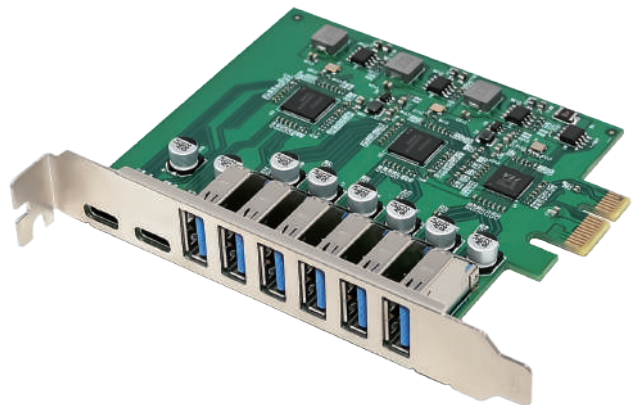


PCIe x1 NEC72021 USB3.0 2A2C 5Gbps Expansion Card PCIe X1 VL805 USB 3.0 6A2C 5Gbps Expansion Card


Chipset: NEC D720201 Interface: 2 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps 2 x USB3.0 TYPE-C
Power supply: Built-in SATA-15pin power connector
Dimension: 64 x 65 mm(PCIe Board) Product weight: 39.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

Chipset: VL805 + D720210 Interface: 6 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps 2 x USB3.0 TYPE-C
Power supply: Self-powered
Dimension: 85 x 103 mm(PCIe Board) Product weight: 71.6 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW614

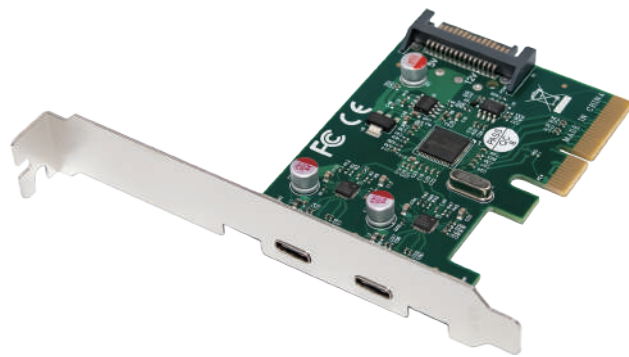

PW631

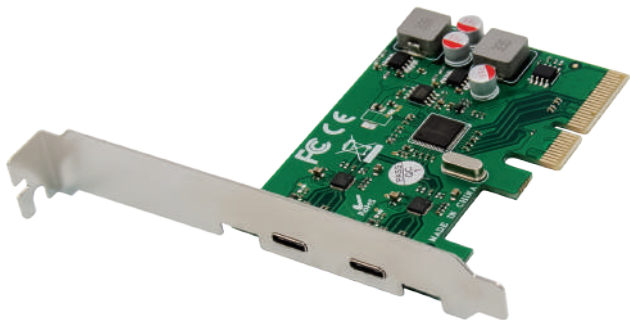


PCIe X4 ASM1142 USB 3.1 2C 10Gbps Expansion Card PCIe X4 ASM1142 USB 3.1 2C 10Gbps Expansion Card


Chipset: ASMedia ASM1142 Interface: 2 x USB3.1 TYPE-C
Data rate per port: USB3.1 Gen2 10Gbps
Power supply: Built-in SATA-15pin power connector
Dimension: 80 x 58 mm(PCIe Board) Product weight: 31.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

Chipset: ASMedia ASM1142 Interface: 2 x USB3.1 TYPE-C
Data rate per port: Up to 10Gbps Power supply: Self-powered
Dimension: 80 x 58 mm(PCIe Board) Product weight: 38.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box

PW618

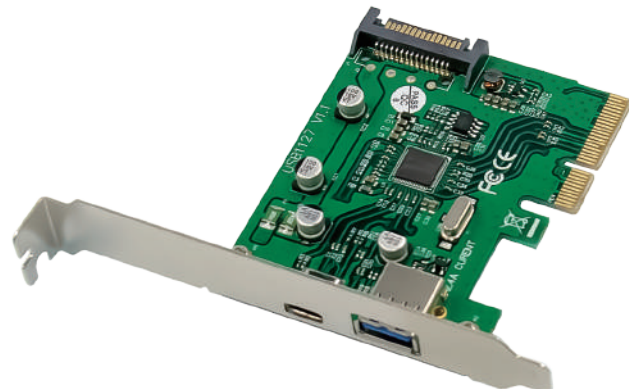

PW625

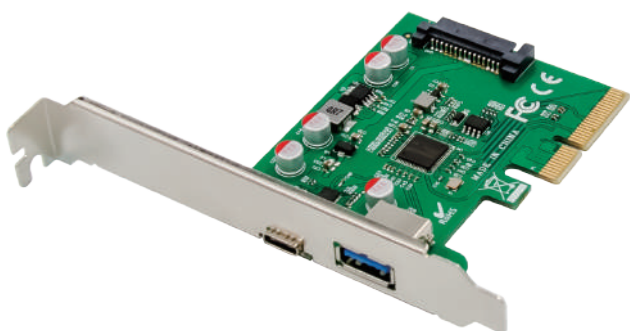


PCIe X4 ASM1142 USB 3.1 C&A 10Gbps Expansion Card PCIe X4 ASM1142 USB 3.1 C&A 10Gbps Expansion Card

Chipset: ASMedia ASM1142 Interface: 1 x USB3.0 TYPE-C
Data rate per port: Up to 10Gbps 1 x USB3.0 TYPE-A(2.4A Curent)
Power supply: Built-in SATA-15pin power connector
Dimension: 80 x 58 mm(PCIe Board) Product weight: 31.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

Chipset: ASMedia ASM1142 Interface: 1 x USB3.0 TYPE-A
Data rate per port: Up to 10Gbps 1 x USB3.0 TYPE-C
Power supply: Self-powered
Dimension: 80 x 58 mm(PCIe Board) Product weight: 48.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW619

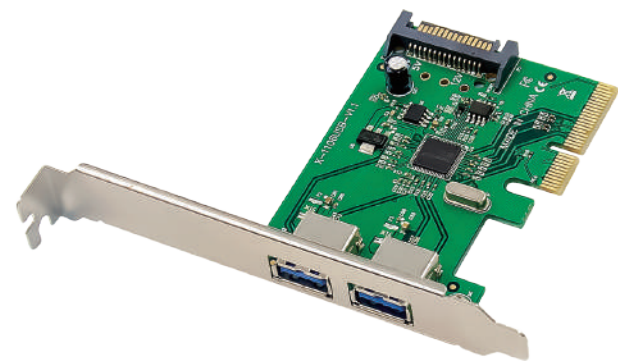

PCIe x4 ASM3142 USB3.1 2A3C 10Gbps Expansion Card

Chipset: ASMedia ASM1142 Interface: 2 x USB3.0 TYPE-A
Data rate per port: speeds of up to 10Gbps
Power supply: Built-in SATA-15pin power connector
Dimension: 80 x 58 mm(PCIe Board) Product weight: 35 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW611



PCIe X1 ASM1042A USB3.0 2A 5Gbps Expansion Card

Chipset: ASMedia ASM1042A Interface: 2 x USB3.0 TYPE-A
Data rate per port: speeds of up to 5Gbps
Power supply: Built-in D 4pin power connector
Dimension: 65 x 60 mm(PCIe Board) Product weight: 35.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW633

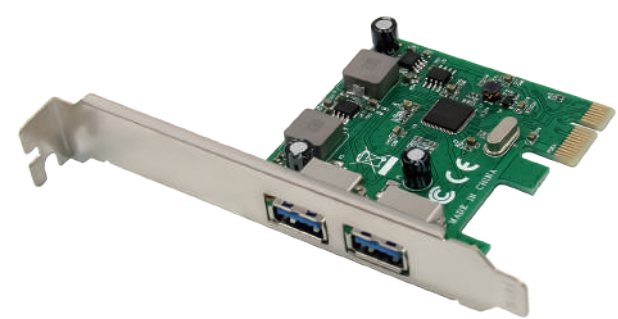

PCIe X1 ASM1042A USB3.0 2A 5Gbps Expansion Card

Chipset: ASMedia ASM1042A Interface: 2 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps Power supply: Self-powered
Dimension: 65 x 60 mm(PCIe Board) Product weight: 36.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box


PW624



PCIe X1 ASM1042A USB3.0 2A 5Gbps Expansion Card

Chipset: ASMedia ASM1042A Interface: 2 x USB3.0 TYPE-A
Data rate per port: speeds of up to 5Gbps
Power supply: Built-in SATA-15pin power connector
Dimension: 65 x 60 mm(PCIe Board) Product weight: 35.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW612

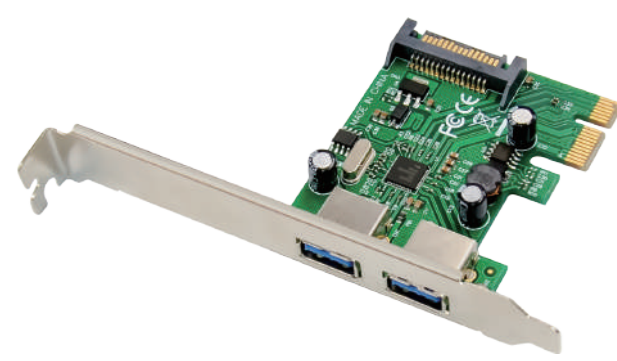

PCIe X1 NEC720202 USB3.0 2A 5Gbps Expansion Card

Chipset: NEC D720202 Interface: 2 x USB3.0 TYPE-A
Data rate per port: speeds of up to 5Gbps
Power supply: Built-in SATA-15pin power connector
Dimension: 67 x 53 mm(PCIe Board) Product weight: 34.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW63

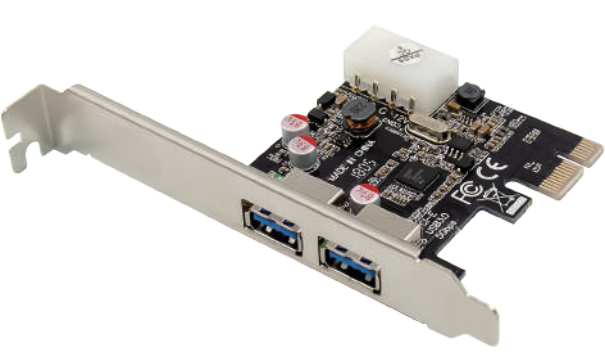

PCIe X1 NEC720202 USB3.0 2A 5Gbps Expansion Card

Chipset: NEC D720202 Interface: 2 x USB3.0 TYPE-A
Data rate per port: speeds of up to 5Gbps
Power supply: Built-in D 4pin power connector
Dimension: 65 x 67 mm(PCIe Board) Product weight: 36.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW629

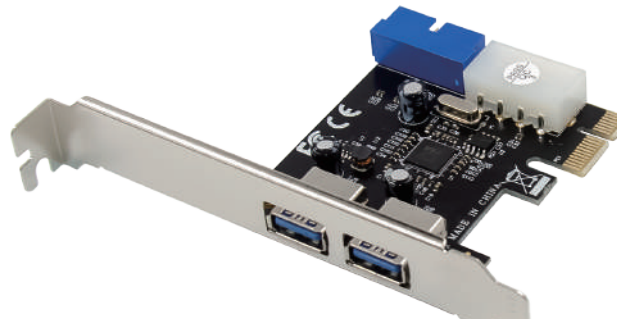

PCIe X1 VL805 2-USB3.0&19pin 5Gbps Expansion Card

Chipset: VIA VL805 Interface: 2 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps 1 x 19pin USB3.0 Front port
Power supply: Built-in D 4pin power connector
Dimension: 63 x 58 mm(PCIe Board) Product weight: 35.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW628

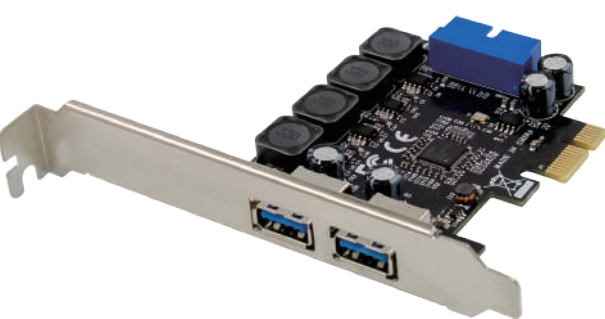

PCIe X1 NEC720201 USB3.0 2A & 19pin Expansion Card

Chipset: NEC D720202 Interface: 2 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps 1 x 19pin USB3.0 Front port
Power supply: Self-powered
Dimension: 78 x 63 mm(PCIe Board) Product weight: 52.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW692

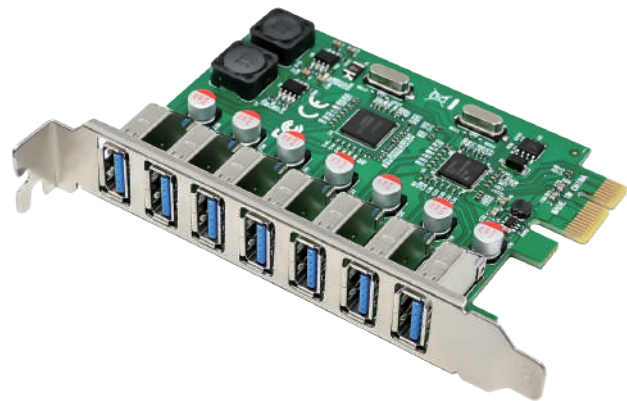

PCIe X1 NEC720201 USB3.0 7A 5Gbps Expansion Card

Chipset: NEC D720201+D720210 Interface: 7 x USB3.1 TYPE-A
Data rate per port: speeds of up to 5Gbps
Power supply: Self-powered
Dimension: 72 x 98 mm(PCIe Board) Product weight: 71.6 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box


PW673

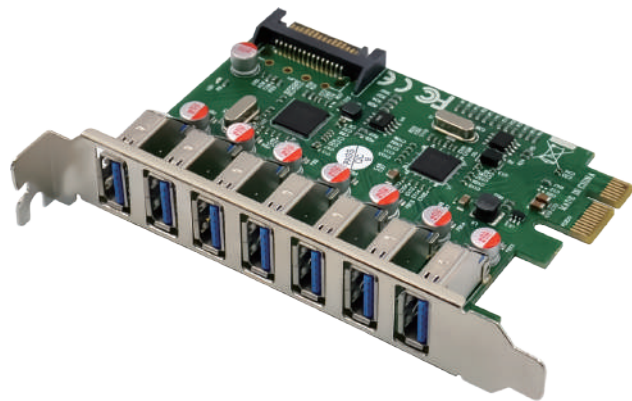

PCIe X1 NEC720201 USB3.0 7A 5Gbps Expansion Card

Chipset: NEC D720201 + VL812 Interface: 7 x USB3.1 TYPE-A
Data rate per port: speeds of up to 5Gbps
Power supply: Built-in SATA-15pin power connector
Dimension: 75 x 100 mm(PCIe Board) Product weight: 83.4 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box


PW635

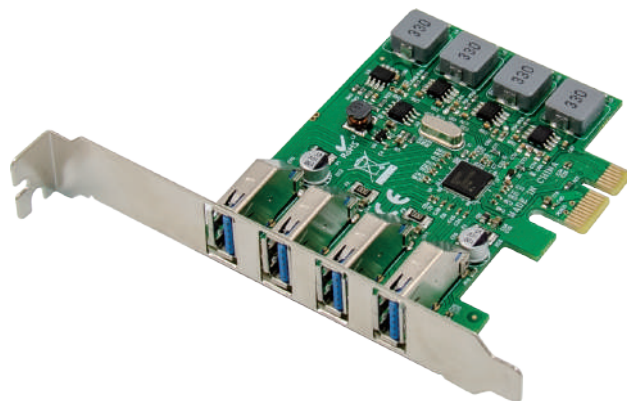

PCIe X1 NEC720201 USB3.0 4A 5Gbps Expansion Card

Chipset: NEC D720201 Interface: 4 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps Power supply: Self-powered
Dimension: 82 x 68 mm(PCIe Board) Product weight: 58.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box


PW634

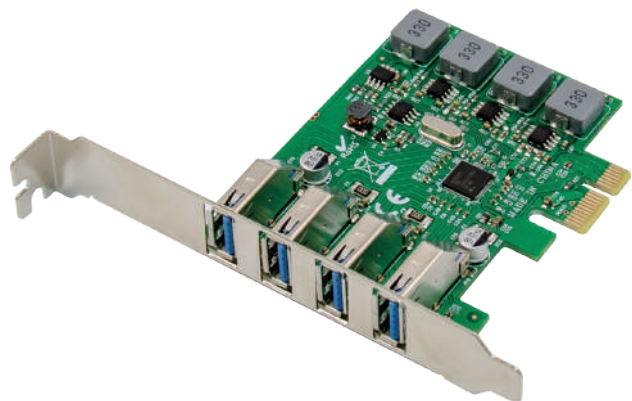

PCIe X1 VL805 4-Port USB3.0 5Gbps Expansion Card

Chipset: VIA VL805 Interface: 4 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps Power supply: Self-powered
Dimension: 82 x 68 mm(PCIe Board) Product weight: 58.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box


PW627

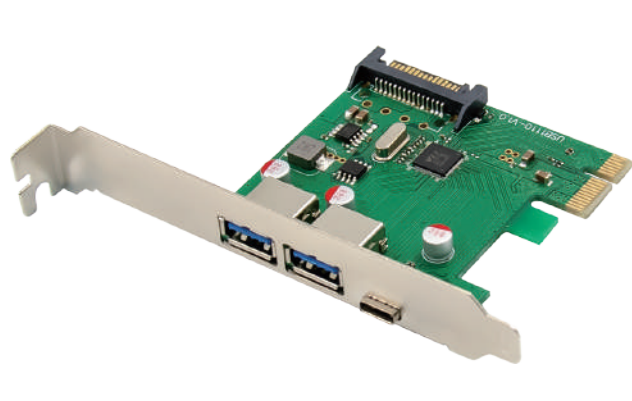

PCIe X1 VL805 USB 3.0 2A1C 5Gbps Expansion Card

Chipset: VIA VL805 Interface: 1 x USB3.0 TYPE-C
Data rate per port: Up to 5Gbps 2 x USB3.0 TYPE-A
Power supply: Built-in SATA-15pin power connector
Dimension: 66 x 68 mm(PCIe Board) Product weight: 39.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW617

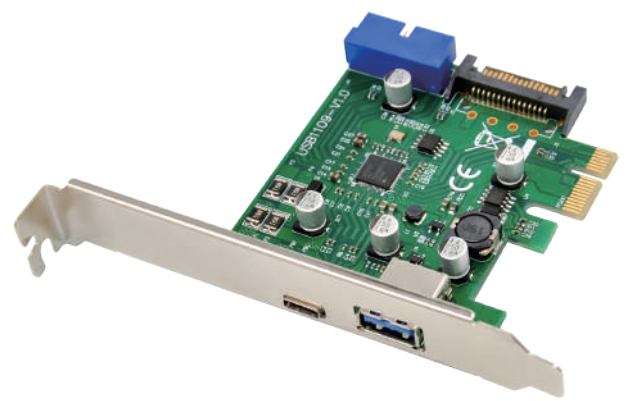

PCIe x1 NEC720201 USB3.0 C+A&19PIN Expansion Card

Chipset: NEC D720201 Interface: 1 x USB3.0 TYPE-C
Data rate per port: Up to 5Gbps 1 x USB3.0 TYPE-A(2.4A Current)
Power supply: Built-in SATA-15pin power connector
Dimension: 78 x 69 mm(PCIe Board) Product weight: 30.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW62

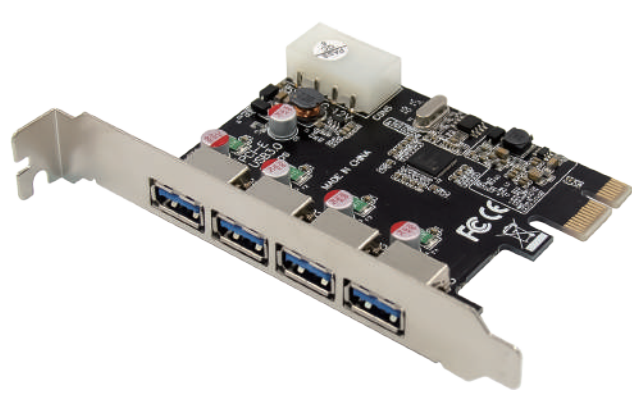

PCIe X1 NEC720201 USB3.0 4A 5Gbps Expansion Card

Chipset: NEC D720201 Interface: 4 x USB3.0 TYPE-A
Data rate per port: speeds of up to 5Gbps
Power supply: Built-in D 4pin power connector
Dimension: 62 x 86 mm(PCIe Board) Product weight: 45.6 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box


PW636

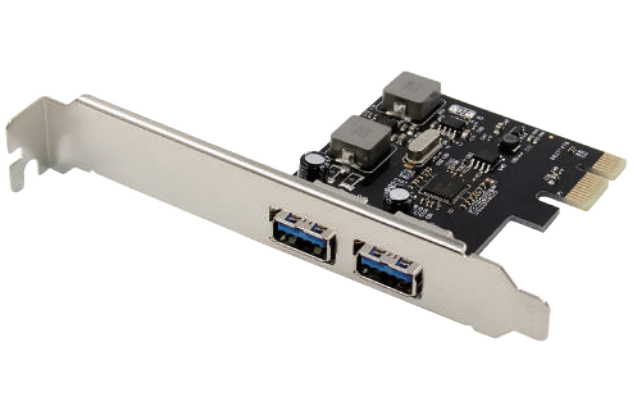

PCIe X1 NEC720202 USB3.0 2A 5Gbps Expansion Card

Chipset: NEC D720202 Interface: 2 x USB3.0 TYPE-A
Data rate per port: speeds of up to 5Gbps (3A Current)
Power supply: Self-powered
Dimension: 65 x 67 mm(PCIe Board) Product weight: 38.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW69

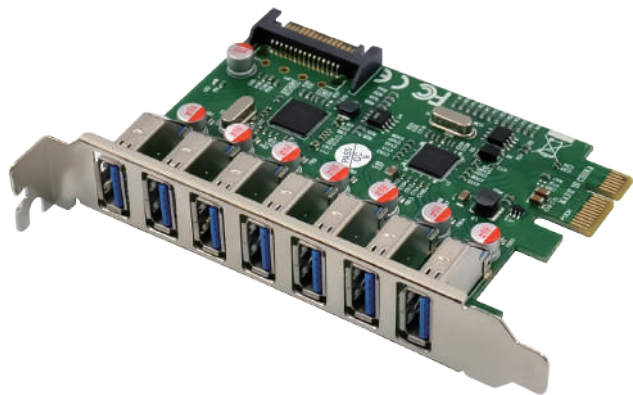

PCle x1 VL805 7-Port USB 3.0 5Gbps Expansion Card

Chipset: VIA VL805 + VL812 Interface: 7 x USB 3.0 TYPE-A
Data rate per port: USB Super-Speed (5 Gbps)
Power supply: Built-in SATA-15pin power connector
Dimension: 70 x 103 mm(PCle Board) Product weight: 65.8 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box


PW610

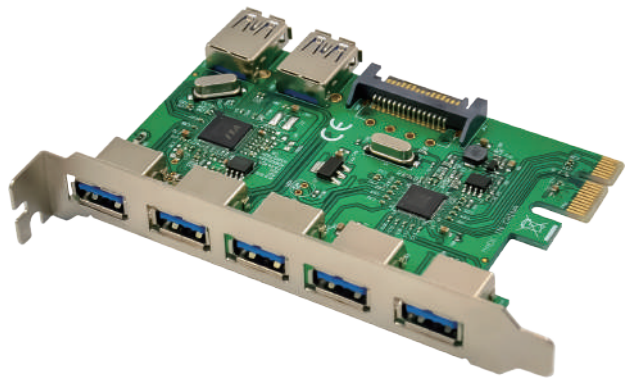

PCle x1 VL805 USB3.0 (5+2) Port 5Gbps Expansion Card

Chipset: VIA VL805 + VL812 Interface: 5 x External USB3.0 port
Data rate per port: Up to 5Gbps 2 x Built-in USB3.0 port
Power supply: Built-in SATA-15pin power connector
Dimension: 70 x 103 mm(PCle Board) Product weight: 76.8 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW640

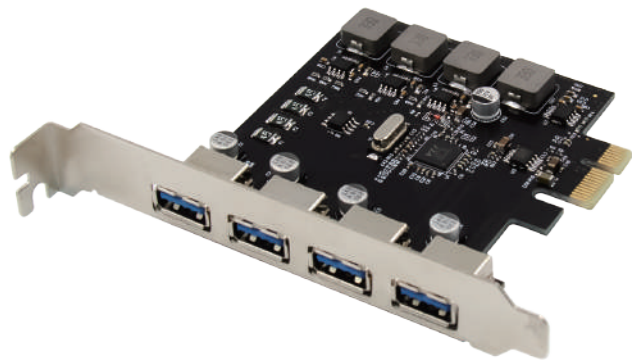

PCle x1 VL805 4-Port USB 3.0 5Gbps Expansion Card

Chipset: VIA VL805 Interface: 4 x USB 3.0 TYPE-A
Data rate per port: USB Super-Speed (5 Gbps)
Power supply: Self-powered
Dimension: 82 x 80 mm(PCle Board) Product weight: 60 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box


PW670



PCle x1 VL805 USB TYPE-A & C 5Gbps Expansion Card

Chipset: VIA VL805 Interface: 2 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps 1 x USB3.0 TYPE-C
Power supply: Built-in SATA-15pin power connector
Dimension: 78 x 67 mm(PCle Board) Product weight: 47 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW65

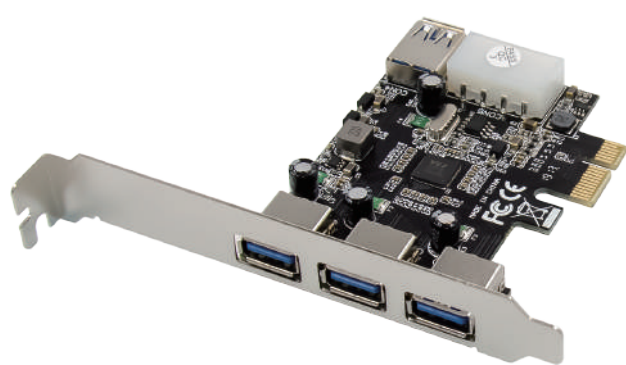

PCle x1 VL805 USB3.0 (3+1) Port 5Gbps Expansion Card

Chipset: VIA VL805 Interface: 3 x External USB3.0 port
Data rate per port: Up to 5Gbps 1 x Built-in USB3.0 port
Power supply: Built-in D 4pin power connector
Dimension: 80 x 58 mm(PCle Board) Product weight: 41.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW66

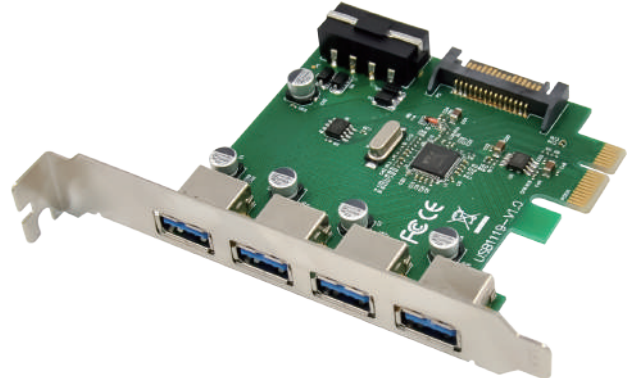

PCle x1 VL805 4-Port USB 3.0 5Gbps Expansion Card

Chipset: VIA VL805 Interface: 4 x USB 3.0 TYPE-A
Data rate per port: USB Super-Speed (5 Gbps)
Power supply: Built-in D 4pin&SATA-15pin power connector
Dimension: 76 x 80 mm(PCle Board) Product weight: 46.3 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box


PW64

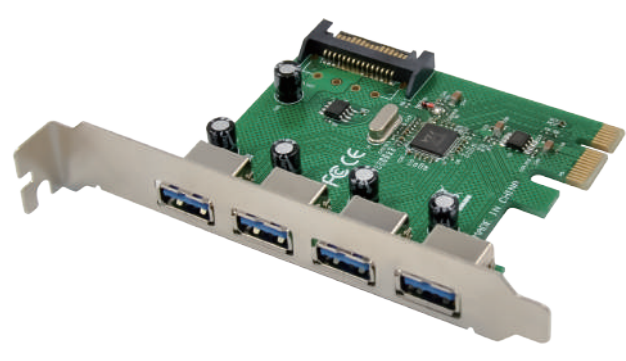

PCle x1 VL805 4-Port USB 3.0 5Gbps Expansion Card

Chipset: VIA VL805 Interface: 4 x USB 3.0 TYPE-A
Data rate per port: USB Super-Speed (5 Gbps)
Power supply: Built-in SATA-15pin power connector
Dimension: 68 x 80 mm(PCle Board) Product weight: 41.5 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box


PW67

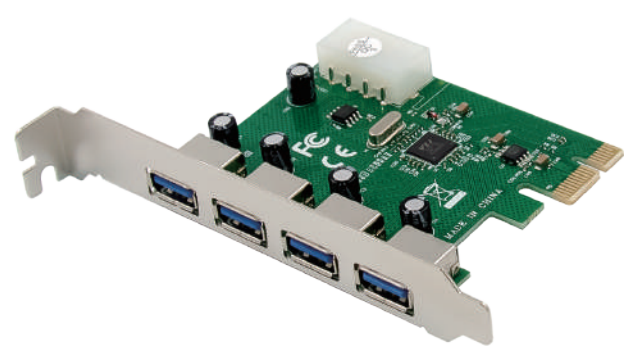

PCle x1 VL805 4-Port USB 3.0 5Gbps Expansion Card

Chipset: VIA VL805 Interface: 4 x USB 3.0 TYPE-A
Data rate per port: USB Super-Speed (5 Gbps)
Power supply: Built-in D 4pin power connector
Dimension: 65 x 85 mm(PCle Board) Product weight: 45 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW678

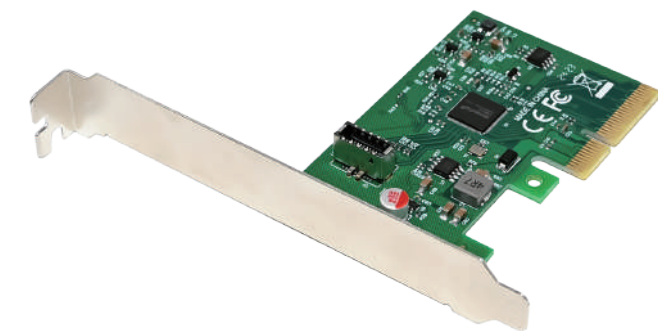


Free Drive

PCIe X4 ASM3242 USB3.2 20G TYPE-E Expansion Card

Chipset: ASMedia ASM3242 Interface: 1 x USB3.1 TYPE-E
Data rate per port: Up to 20Gbps Power supply: Self-powered
Dimension: 79 x 51 mm(PCIe Board) Product weight: 33.4 g
Accessories: 1 x Low profile bracket, 1 x Anti-static bag
1 x Neutral box


PW679

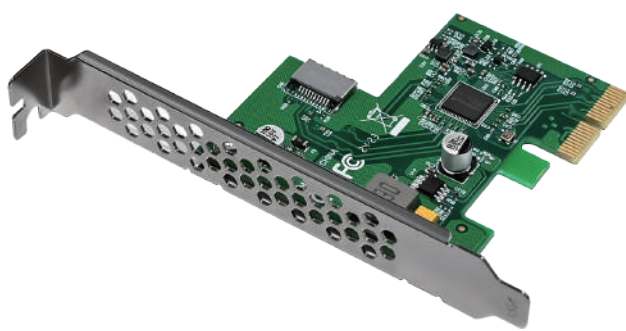

PCIe X2 ASM3142 USB 3.1 10G TYPE-E Expansion Card

Chipset: ASMedia ASM3142 Interface: 1 x USB3.1 TYPE-E
Data rate per port: USB3.1 Gen 2 10Gbps
Power supply: Self-powered
Dimension: 70 x 67 mm(PCIe Board) Product weight: 32.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW698

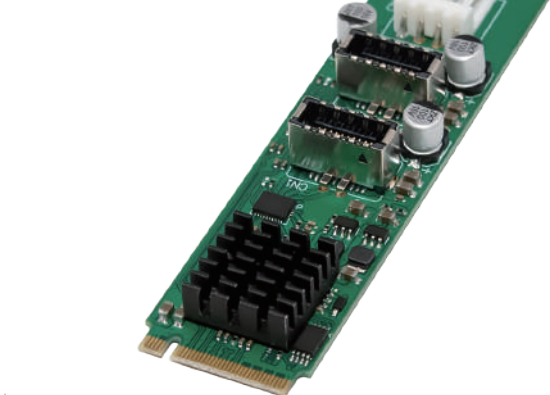

M.2 M ASM3142 2-Port USB 3.1 TYPE-E Expansion Card

Chipset: ASMedia ASM3142 Interface: 2 x USB3.1 TYPE-E
Data rate per port: USB3.1 Gen 2 10Gbps
Power supply: Built-in D 4pin power connector
Dimension: 22 x 80 mm(M.2 Board) Product weight: 9.2 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box


PW677

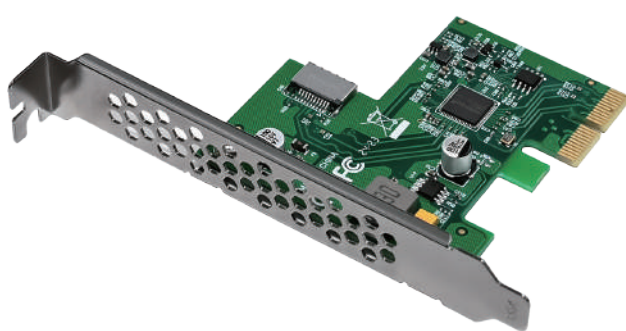

PCIe X2 ASM1142 USB 3.1 10G TYPE-E Expansion Card

Chipset: ASMedia ASM1142 Interface: 1 x USB3.1 TYPE-E
Data rate per port: USB3.1 Gen 2 10Gbps
Power supply: Self-powered
Dimension: 70 x 67 mm(PCIe Board) Product weight: 32.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW645

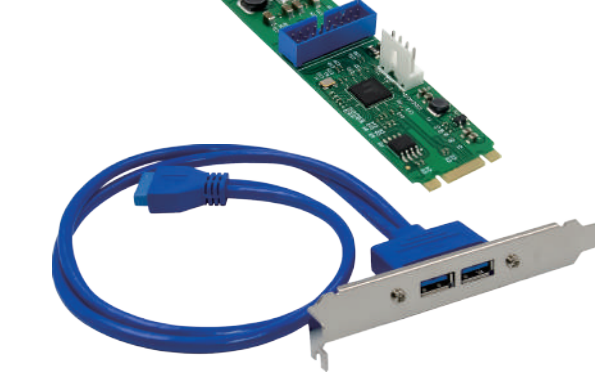

M.2 B+M NEC720202 2-USB3.0 5Gbps Expansion Card

Chipset: NEC D720202 Interface: 1 x 19pin USB3.0 Front port
Data rate per port: Up to 5Gbps Power supply: Built-in 4pin power
Dimension: 22 x 80 mm(M.2 Board) Product weight: 95.5 g
Accessories: 1 x 19pin USB3.0 converter cable: 52cm, 1 x CD-Driver
1 x 4pin power supply cable: 20.5cm, 1 x Neutral box


PW655

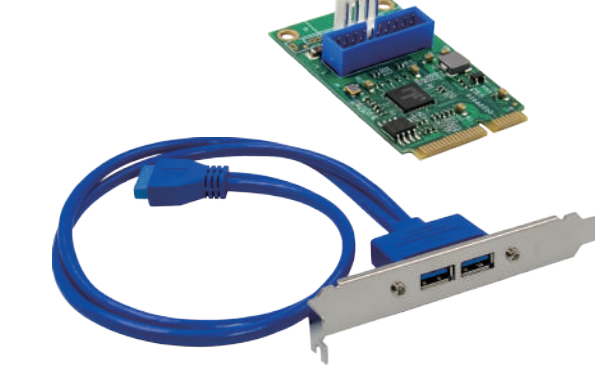

MiniPCIE NEC720202 2-USB3.0 5Gbps Expansion Card

Chipset: NEC D720202 Interface: 1 x 19pin USB3.0 Front port
Data rate per port: Up to 5Gbps Power supply: Built-in 4pin power
Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 83 g
Accessories: 1 x 19pin USB3.0 converter cable: 52cm, 1 x CD-Driver
1 x 4pin power supply cable: 20.5cm, 1 x Neutral box


PW646

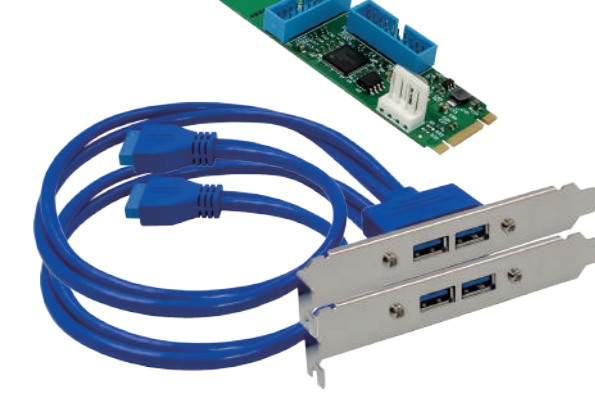

M.2 B+M NEC720201 4-USB3.0 5Gbps Expansion Card

Chipset: NEC D720201 Interface: 2 x 19pin USB3.0 Front port
Data rate per port: Up to 5Gbps Power supply: Built-in 4pin power
Dimension: 22 x 80 mm(M.2 Board) Product weight: 172.3 g
Accessories: 2 x 19pin USB3.0 converter cable: 52cm, 1 x CD-Driver
1 x 4pin power supply cable: 20.5cm, 1 x Neutral box

PW656

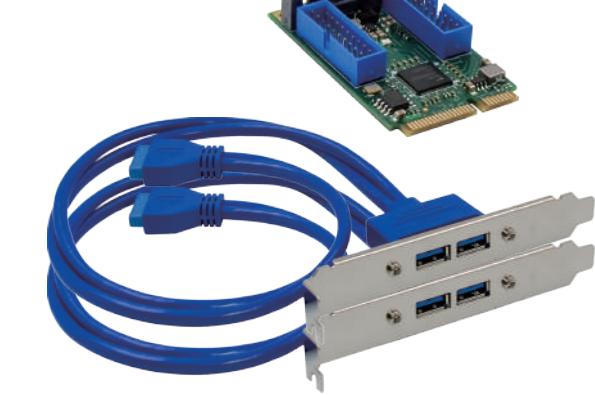

MiniPCIE NEC720201 4-USB3.0 5Gbps Expansion Card

Chipset: NEC D720201 Interface: 2 x 19pin USB3.0 Front port
Data rate per port: Up to 5Gbps Power supply: SATA-15pin power
Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 153.6 g
Accessories: 2 x 19pin USB3.0 converter cable: 52cm, 1 x CD-Driver
1 x SATA-15pin power supply cable, 1 x Neutral box

PW661



PW662



Free Drive

3.25in Front Panel VL820 USB 3.1 4A 10Gbps Adapter

3.25in Front Panel VL820 USB3.1 2A2C 10Gbps Adapter

Chipset: VIA VL820 Upstream: USB3.1 TYPE-A
Data rate per port: Up to 10Gbps Downstream: 4 x USB3.1 TYPE-A
Power supply: Built-in SATA 15pin power connector
Dimension: L102 x W94 x H25 mm mm Product weight: 114.2 g
Accessories: 1 x 19pin to USB TYPE-AM cable, 1 x SATA 15pin cable
1 x Anti-static bag, 1 x Neutral box

Chipset: VIA VL820 Upstream: USB3.1 TYPE-A
Data rate per port: Up to 10Gbps Downstream: 2 x USB3.1 C&A
Power supply: Built-in SATA 15pin power connector
Dimension: L102 x W94 x H25 mm Product weight: 113.7 g
Accessories: 1 x 19pin to USB TYPE-AM cable, 1 x SATA 15pin cable
1 x Anti-static bag, 1 x Neutral box

PW664



PW663




5.25in Front Panel VL820 USB 3.1 4A 10Gbps Adapter

5.25in Front Panel VL820 USB3.1 2A2C 10Gbps Adapter


Chipset: VIA VL820 Upstream: USB3.1 TYPE-A
Data rate per port: Up to 10Gbps Downstream: 4 x USB3.1 TYPE-A
Power supply: Built-in SATA 15pin power connector
Dimension: L148 x W77 x H42 mm Product weight: 158.8 g
Accessories: 1 x 19pin to USB TYPE-AM cable, 1 x SATA 15pin cable
1 x Anti-static bag, 1 x Neutral box

Chipset: VIA VL820 Upstream: USB3.1 TYPE-A
Data rate per port: Up to 10Gbps Downstream: 2 x USB3.1 C&A
Power supply: Built-in SATA 15pin power connector
Dimension: L148 x W77 x H42 mm Product weight: 157.6 g
Accessories: 1 x 19pin to USB TYPE-AM cable, 1 x SATA 15pin cable
1 x Anti-static bag, 1 x Neutral box

PW641

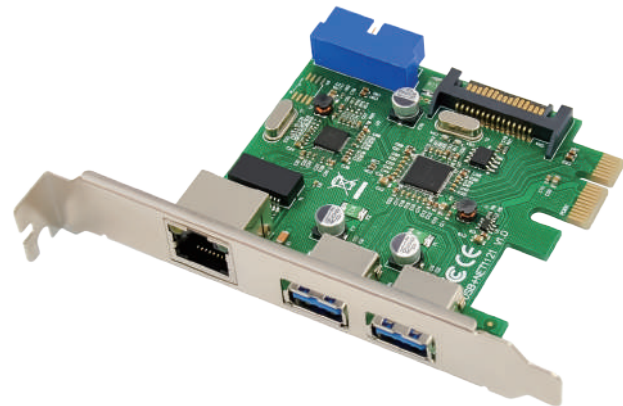

PW681

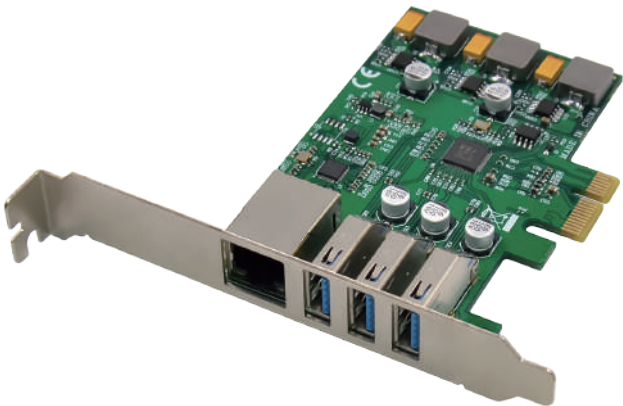


PCIe x1 4-Port USB3.0 & Gigabit Ethernet Adapter Card

PCIe x1 3-Port USB3.0 & Gigabit Ethernet Adapter Card

Chipset: D720201 + RTL8153 Interface: 2 x USB3.0 & 19pin port
Data rate: USB 5Gbps, Ethernet 1GbE 1 x RJ45 Copper Port
Power supply: Built-in SATA-15pin power connector
Dimension: 65 x 85 mm(PCIe Board) Product weight: 46 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

Chipset: VL805 + RTL8153 Interface: 3 x USB3.0 TYPE-A
Data rate: USB 5Gbps, Ethernet 1GbE 1 x RJ45 Copper Port
Power supply: Self-powered
Dimension: 97 x 68 mm (PCIe Board) Product weight: 66.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW642

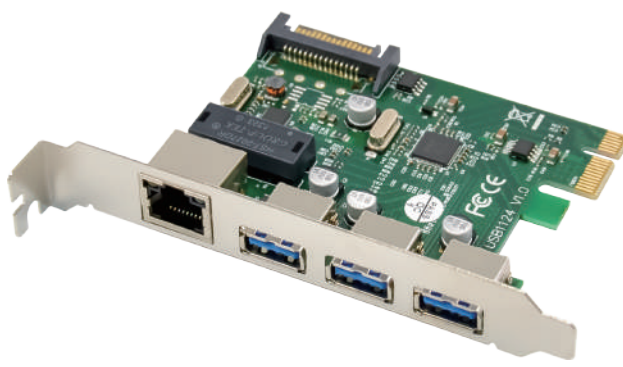

PW643




PCIe x1 3-Port USB3.0 & Gigabit Ethernet Adapter Card

PCIe x1 3-Port USB3.0 & Gigabit Ethernet Adapter Card

Chipset: VL805 + RTL8153 Interface: 3 x USB3.0 TYPE-A
Data rate: USB 5Gbps, Ethernet 1GbE 1 x RJ45 Copper Port
Power supply: Built-in SATA-15pin power connector
Dimension: 75 x 80 mm(PCIe Board) Product weight: 46.8 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

Chipset: VL805 + AX88179 Interface: 3 x USB3.0 TYPE-A
Data rate: USB 5Gbps, Ethernet 1GbE 1 x RJ45 Copper Port
Power supply: Built-in SATA-15pin power connector
Dimension: 65 x 88 mm(PCIe Board) Product weight: 47.3 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box


PW622

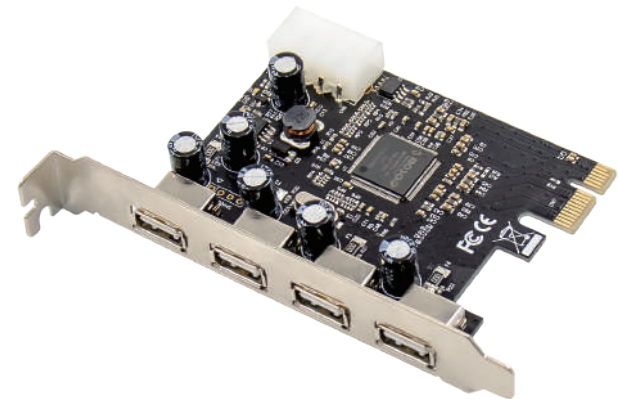

PCIe x1 MCS9990 4-Enhanced USB 2.0 Expansion Card

Chipset: ASIX MCS9990 Interface: 4 x USB2.0 Port
Data rate per port: USB High-speed (480Mbps)
Power supply: Built-in D 4pin power connector
Dimension: 65 x 85 mm(PCIe Board) Product weight: 46.2 g
Accessories: 1 x Anti-static bag, 1 x Neutral box


PW623

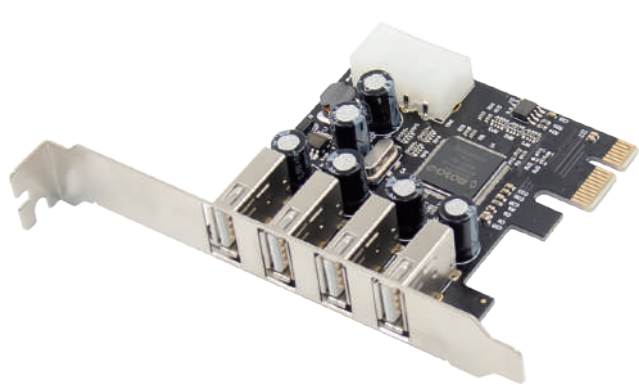

PCIe x1 MCS9990 4-Enhanced USB 2.0 Expansion Card

Chipset: ASIX MCS9990 Interface: 4 x USB2.0 Port
Data rate per port: USB High-speed (480Mbps)
Power supply: Built-in D 4pin power connector
Dimension: 65 x 69 mm(PCIe Board) Product weight: 43.4 g
Accessories: 1 x Low profile bracket, 1 x Anti-static bag, 1 x Neutral box

PW6100

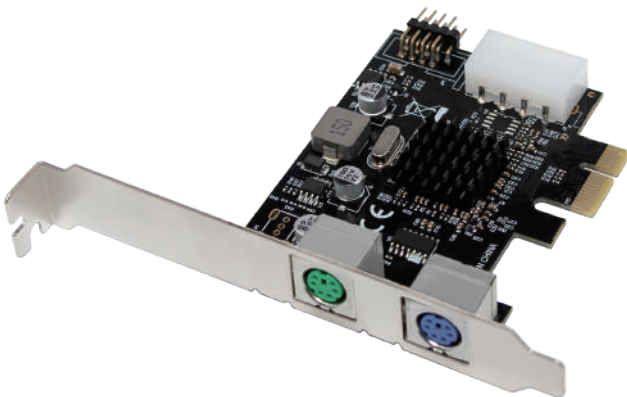

PCIe X1 MCS9990 2-PS/2&USB2.0 Expansion Card V1.1

Chipset: ASIX MCS9990 Interface: 2 x PS/2 Port
Data rate per port: USB High-speed (480Mbps) 1 x 9pin USB2.0
Power supply: Built-in D 4pin power connector
Dimension: 80 x 65 mm(PCIe Board) Product weight: 50.3 g
Accessories: 1 x Low profile bracket, 1 x Anti-static bag, 1 x Neutral box


PW630



PCIe x1 MCS9990 2-Port PS/2&USB2.0 Expansion Card

Chipset: ASIX MCS9990 Interface: 2 x PS/2 Port
Data rate per port: USB High-speed (480Mbps) 1 x 9pin USB2.0
Power supply: Built-in D 4pin power connector
Dimension: 80 x 65 mm(PCIe Board) Product weight: 50.3 g
Accessories: 1 x Low profile bracket, 1 x Anti-static bag, 1 x Neutral box


PW651

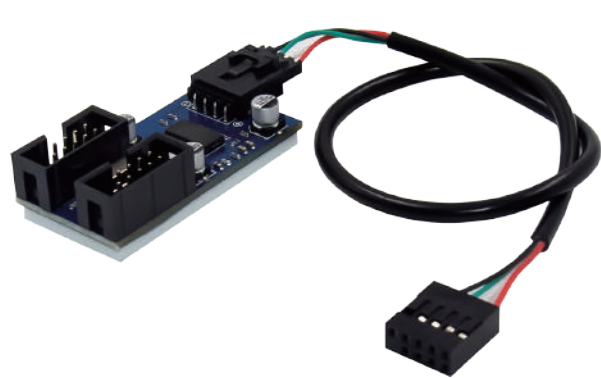

USB2.0 GL850G 2-Port 480Mbps USB2.0 HUB Adapter

Chipset: Genesys Logic GL850G Upstream: 9pin USB Port
Data rate per port: Up to 480Mbps Downstream: 2 x USB2.0 HUB
Power supply: Support Bus power supply/Self-power supply mode
Dimension: 50 x 25 mm(HUB Board) Product weight: 9.1 g
Accessories: 1 x Anti-static bag, 1 x Neutral box


PW652

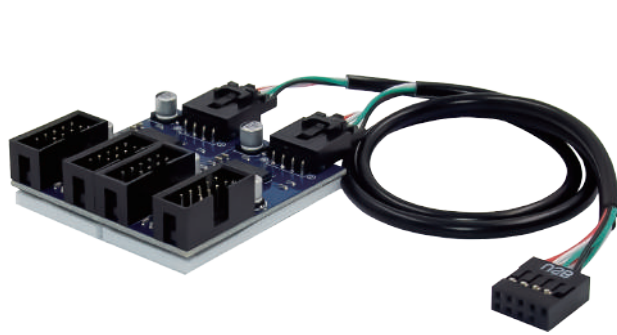

USB2.0 GL850G 4-Port 480Mbps USB2.0 HUB Adapter

Chipset: Genesys Logic GL850G Upstream: 9pin USB Port
Data rate per port: Up to 480Mbps Downstream: 4 x USB2.0 HUB
Power supply: Support Bus power supply/Self-power supply mode
Dimension: 50 x 50 mm(HUB Board) Product weight: 18.2 g
Accessories: 1 x Anti-static bag, 1 x Neutral box


PW650

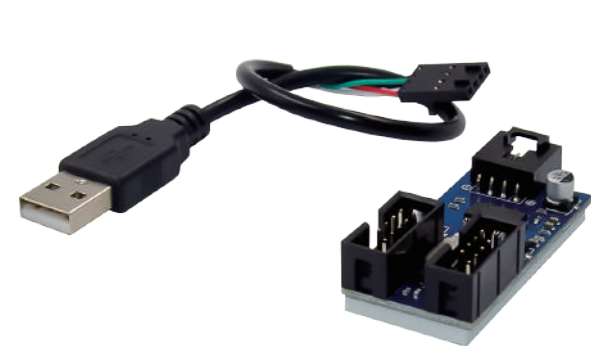

USB2.0 GL850G 2-Port 480Mbps USB2.0 HUB Adapter

Chipset: Genesys Logic GL850G Upstream: 4pin USB Port
Data rate per port: Up to 480Mbps Downstream: 2 x USB2.0 HUB
Power supply: Support Bus power supply/Self-power supply mode
Dimension: 50 x 25 mm(HUB Board) Product weight: 7.3 g
Accessories: 1 x Anti-static bag, 1 x Neutral box


PW687

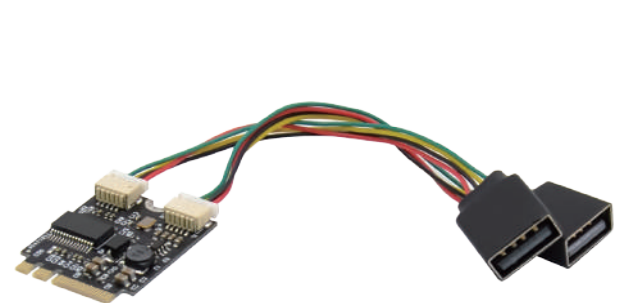

M.2 A+E GL850G 2-Port USB 2.0 HUB Expansion Card

Chipset: Genesys Logic GL850G Interface: 2 x USB2.0 Port
Data rate per port: Up to 480Mbps
Power supply: Support Bus power supply/Self-power supply mode
Dimension: 22 x 30 mm(M.2 Board) Product weight: 7.4 g
Accessories: 1 x Anti-static bag, 1 x Neutral box


PW649



19-pin to Type-E Front Panel USB3.1 Expansion Card

Chipset: N/A
Interface: 1 x Type-E port
Transmission rate: Up to 10Gbps per port
Dimension: 24 x 28 mm(Board)
Product weight: 4.3 g
Accessories: 1 x Anti-static bag, 1 x Neutral box


PW644



19-pin to Type-E Front Panel USB3.1 Expansion Card

Chipset: EJ179V
Interface: 1 x Type-E port
Transmission rate: Up to 10Gbps per port
Dimension: 24 x 28 mm(Board)
Product weight: 4.5 g
Accessories: 1 x Anti-static bag, 1 x Neutral box


PW684



19-pin to Type-E Front Panel USB3.1 Expansion Card

Chipset: N/A
Interface: 1 x Type-E port
Transmission rate: Up to 10Gbps per port
Dimension: x 28 mm(Board)
Product weight: g
Accessories: 1 x Anti-static bag, 1 x Neutral box

PW68

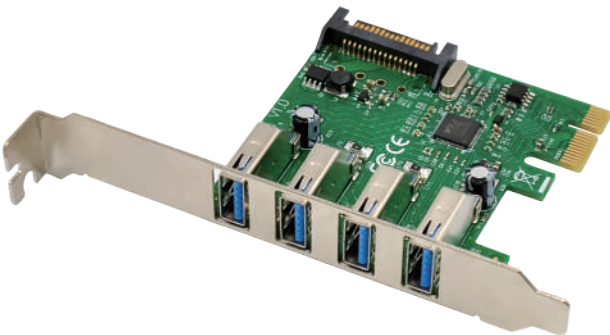

PCIe X1 VL805 4-Port USB 3.0 5Gbps Expansion Card

Chipset: VIA VL805
Interface: 4 x USB3.0 TYPE-A
Data rate per port: Up to 5Gbps
Power supply: Built-in SATA 15pin power connector
Dimension: 68 x 65 mm(PCIe Board)
Product weight: 43.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box


PW699



USB3.0 HUB GL3510 TYPE-E & 19PIN Expansion Board

Chipset: GL3510
Interface: 1 x USB3.0 & TYPE-E Port
Data rate per port: Up to 5Gbps
Power supply: SATA 4pin power
Dimension: 67 x 30 mm(HUB Board)
Product weight: 47 g
Accessories: 1 x 19pin USB 3.0 cable: 42cm, 1 x Anti-static bag
1 x SATA 4pin power cable: 20cm, 1 x Neutral box


PW675

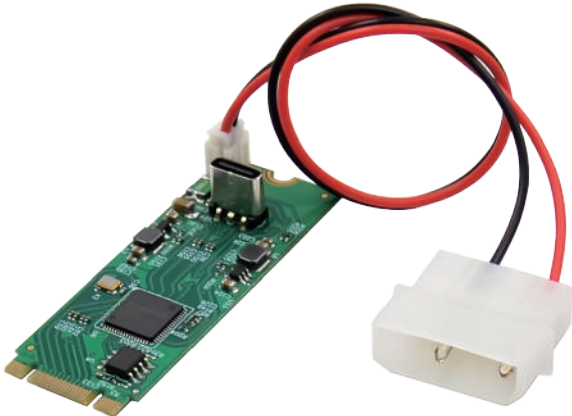

M.2 B+M ASM3142 USB 3.1-C 10Gbps Expansion Card

Chipset: NEC D720201
Interface: 2 x 19pin USB3.0 Port
Data rate per port: Up to 10Gbps
Power supply: Built-in 2pin power
Dimension: 22 x 60 mm(M.2 Board)
Product weight: 7.8 g
Accessories: 1 x 2pin power supply cable: 10.5cm, 1 x Neutral box
1 x CD-Driver, 1 x Anti-static bag

PW417

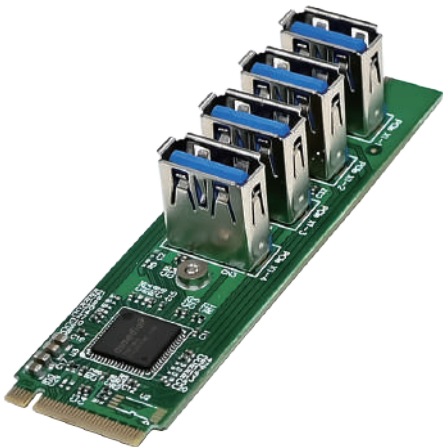

M.2 M 4-Port USB3.0 to PCIe Slot ASM1184 Riser Card

Chipset: ASMedia ASM1184e
Host Interface: M.2 M KEY
Main feature: Split M.2 into four separate PCIe x1 lanes
Dimension: 22 x 80 mm(M.2 Board)
Product weight: 10.2 g
Accessories: 1 x Anti-static bag, 1 x Neutral box

PW696



M.2 M 2-Port USB3.0 to PCIe Slot ASM1182 Riser Card

Chipset: VIA VL805
Interface: 1 x USB3.0 TYPE-E
Data rate per port: Up to 5Gbps
1 x 19pin USB3.0 Front port
Power supply: Built-in 4pin power connector
Dimension: 22 x 80 mm(M.2 Board)
Product weight: 6.8 g
Accessories: 1 x 4pin power cable, 1 x CD-Driver, 1 x Neutral box


PW5114



PCIe x4 ASM2812&I226 2N2T Server NAS Adapter Card

Chipset: ASM2812 + I226 Interface: 2 x 2.5G RJ45 Port
Network rate: 2.5/1GbE/100/10Mbps 2 x M.2 NVMe Port
Transfer rate: 2.5Gb(250MB/s), 5Gb(500MB/s) or 8Gb(1GB/s) per lane
Dimension: 163 x 69 mm (PCIe Board) Product weight: 173.8 g
Accessories: 1 x Low profile bracket, 1 x CD Driver, 1 x Neutral box
2 x Heat sink, 1 x Screw driver, 2 x Screws

PW5116

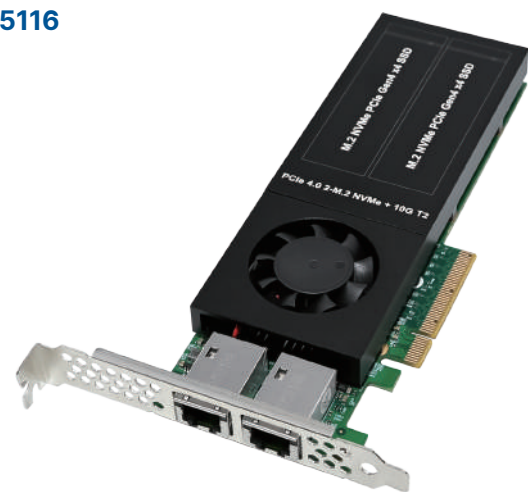

PCIe x8 PEX88024&AQC113 2N2T Server Adapter Card

Chipset: PEX88024 + AQC113 Interface: 2 x 10G RJ45 Port
Network rate: 10G/5G/2.5G/1G/100M/10M 2 x M.2 NVMe Port
Transmission rate: 2.5Gb/s, 5Gb/s, 8Gb/s or 16Gb per lane
Dimension: 185 x 69 mm (PCIe Board) Product weight: 212.3 g
Accessories: 1 x Low profile bracket, 1 x CD Driver, 1 x Neutral box
2 x Heat sink, 1 x Screw driver, 2 x Screws

PW7479



PCIe 4.0 X1 AQC113 10GBASE-T Server NIC(NAS USED)

Chipset: Marvell AQC113 Configuration: 1 x RJ45 Port
Network rate: 10G/5G/2.5G/1G/100M/10M
NAS USED:
Dimension: 40 x 69 mm(PCIe Board) Product weight: 57.7 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW7480



PCIe3.0 X1 AQC113C 10GBASE-T Server NIC(NAS USED)

Chipset: Marvell AQC113C Configuration: 1 x RJ45 Port
Network rate: 10G/5G/2.5G/1G/100M/10M
NAS USED:
Dimension: 40 x 69 mm(PCIe Board) Product weight: 55.7 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW530



PCIe 3.0 X16 ASM2824 4-M.2 M NVMe Expansion Card

Chipset: ASMedia ASM2824 Interface: 4 x M.2 M Key 2280
Transfer rate: 2.5Gb(250MB/s), 5Gb(500MB/s) or 8Gb(1GB/s) per lane
Dimension: 169 x 68 mm(PCIe Board) Product weight: 286.3 g
Accessories: 1 x Low profile bracket, 1 x Screw driver, 4 x Screws
4 x Heat sink, 1 x Neutral box


PW560



PCIe3.0 X8X16 ASM2824 M.2 M NVMe Expansion Card

Chipset: ASMedia ASM2824 Interface: 4 x M.2 M Key 2280
Transfer rate: 2.5Gb(250MB/s), 5Gb(500MB/s) or 8Gb(1GB/s) per lane
Dimension: 169 x 68 mm(PCIe Board) Product weight: 286 g
Accessories: 1 x Low profile bracket, 1 x Screw driver, 4 x Screws
4 x Heat sink, 1 x Neutral box


PW5107

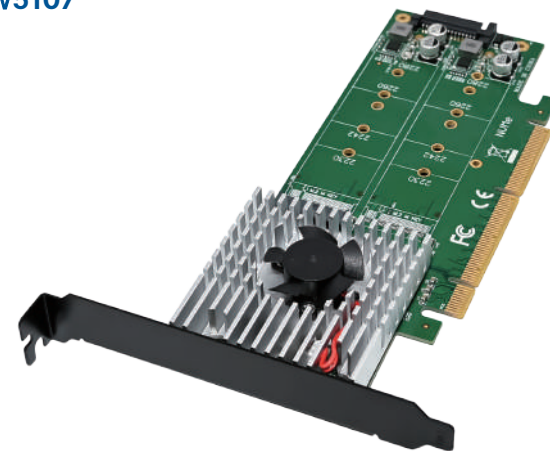

PCIe3.0 X8X16 ASM2812 M.2 M NVMe Expansion Card

Chipset: ASMedia ASM2812 Interface: 2 x M.2 M Key 2280
Transfer rate: 2.5Gb(250MB/s), 5Gb(500MB/s) or 8Gb(1GB/s) per lane
Dimension: 169 x 68 mm(PCIe Board) Product weight: 95.3 g
Accessories: 1 x Low profile bracket, 1 x Screw driver, 2 x Screws
2 x Heat sink, 1 x Neutral box

PW5113

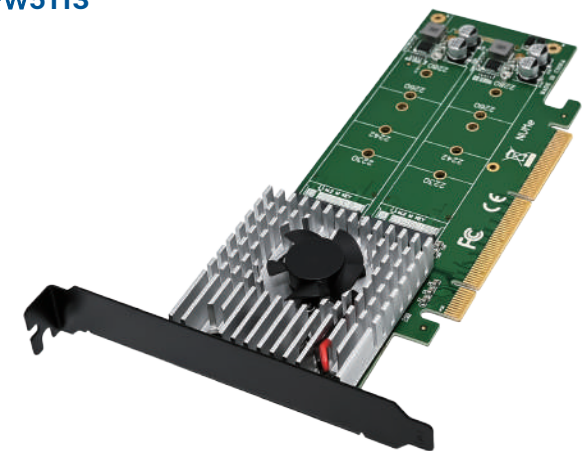

PCIe3.0 X8X16 ASM2824 M.2 M NVMe Expansion Card

Chipset: ASMedia ASM2824 Interface: 4 x M.2 M Key 2280
Transfer rate: 2.5Gb(250MB/s), 5Gb(500MB/s) or 8Gb(1GB/s) per lane
Dimension: 169 x 68 mm(PCIe Board) Product weight: 96.8 g
Accessories: 1 x Low profile bracket, 1 x Screw driver, 4 x Screws
4 x Heat sink, 1 x Neutral box

PW598



PCIe 3.0 X8 PEX8747 4- M.2 M NVMe Expansion Card

Chipset: PLX PEX8747 Interface: 4 x M.2 M Key 2280
Transfer rate: 2.5Gb(250MB/s), 5Gb(500MB/s) or 8Gb(1GB/s) per lane

Dimension: 165 x 67 mm(PCIe Board) Product weight: 285 g
Accessories: 1 x Low profile bracket, 1 x Screw driver, 4 x Screws
4 x Heat sink, 1 x Neutral box

PW599



PCIe 3.0 X16 PEX8747 4- M.2 M NVMe Expansion Card

Chipset: PLX PEX8747 Interface: 4 x M.2 M Key 2280
Transfer rate: 2.5Gb(250MB/s), 5Gb(500MB/s) or 8Gb(1GB/s) per lane

Dimension: 165 x 67 mm(PCIe Board) Product weight: 290 g
Accessories: 1 x Low profile bracket, 1 x Screw driver, 4 x Screws
4 x Heat sink, 1 x Neutral box

PW5111



PCIe 3.0 X16 PEX8747 4- M.2 M NVMe Expansion Card

Chipset: PLX PEX8747 Interface: 4 x M.2 M Key 2280
Transfer rate: 2.5Gb(250MB/s), 5Gb(500MB/s) or 8Gb(1GB/s) per lane

Dimension: 175 x 68 mm(PCIe Board) Product weight: 117.3 g
Accessories: 1 x Low profile bracket, 1 x Screw driver, 4 x Screws
4 x Heat sink, 1 x Neutral box

PW5112



PCIe 3.0 X8 PEX8747 4- M.2 M NVMe Expansion Card

Chipset: PLX PEX8747 Interface: 4 x M.2 M Key 2280
Transfer rate: 2.5Gb(250MB/s), 5Gb(500MB/s) or 8Gb(1GB/s) per lane

Dimension: 175 x 68 mm(PCIe Board) Product weight: 114.5 g
Accessories: 1 x Low profile bracket, 1 x Screw driver, 4 x Screws
4 x Heat sink, 1 x Neutral box

PW535



PCIe 3.0 X16 PEX8724 4- M.2 M NVMe Expansion Card

Chipset: PLX PEX8724 Interface: 4 x M.2 M Key 22110
Transfer rate: 2.5Gb(250MB/s), 5Gb(500MB/s) or 8Gb(1GB/s) per lane

Dimension: 210 x 110 mm(PCIe Board) Product weight: 423.8 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
4 x Heat sink, 4 x Screws

PW5106



PCIe3.0 X8X16 ASM2824 M.2 M NVMe Expansion Card

Chipset: ASMedia ASM2824 Interface: 4 x M.2 M Key 2280
Transfer rate: 2.5Gb(250MB/s), 5Gb(500MB/s) or 8Gb(1GB/s) per lane

Dimension: 210 x 110 mm(PCIe Board) Product weight: 374.6 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
4 x Heat sink, 4 x Screws

PW536



PCIe 3.0 X16 PEX8747 4- M.2 M NVMe Expansion Card

Chipset: PLX PEX8747 Interface: 4 x M.2 M Key 22110
Transfer rate: 2.5Gb(250MB/s), 5Gb(500MB/s) or 8Gb(1GB/s) per lane

Dimension: 210 x 110 mm(PCIe Board) Product weight: 425.8 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
4 x Heat sink, 4 x Screws

PW5110



PCIe 3.0 X16 PEX8748 4- M.2 M NVMe Expansion Card

Chipset: PLX PEX8748 Interface: 4 x M.2 M Key 22110
Transfer rate: 2.5Gb(250MB/s), 5Gb(500MB/s) or 8Gb(1GB/s) per lane

Dimension: 210 x 110 mm(PCIe Board) Product weight: 381.1 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
4 x Heat sink, 4 x Screws

PW5104



PCIe 3.0 X8 88NR2241 4- M.2 M NVMe SSD RAID Card

Chipset: Marvell 88NR2241 Interface: 4 x M.2 M Key 22110
Transfer rate: 2.5Gb(250MB/s), 5Gb(500MB/s) or 8Gb(1GB/s) per lane
Dimension: 210 x 110 mm(PCIe Board) Product weight: 381 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
4 x Heat sink, 4 x Screws

PW596



PCIe 3.0 X8 88NR2241 2- M.2 M NVMe SSD RAID Card

Chipset: Marvell 88NR2241 Interface: 2 x M.2 M Key 2280
Transfer rate: 2.5Gb(250MB/s), 5Gb(500MB/s) or 8Gb(1GB/s) per lane
Dimension: 167 x 69 mm(PCIe Board) Product weight: 185.6 g
Accessories: 1 x Low profile bracket, 1 x Screw driver, 2 x Screws
2 x Heat sink, 1 x Neutral box


PW558



PCIe 4.0 X16 PEX88048 8- M.2 NVMe Expansion Card

Chipset: Broadcom PEX88048 Interface: 8 x M.2 M Key 2280
Transfer rate: 16GT/16Gbps per lane, Max transfer rate up to 32GB/s
Dimension: 312 x 110 mm(PCIe Board) Product weight: 523.3 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
8 x Heat sink, 8 x Screws

PW

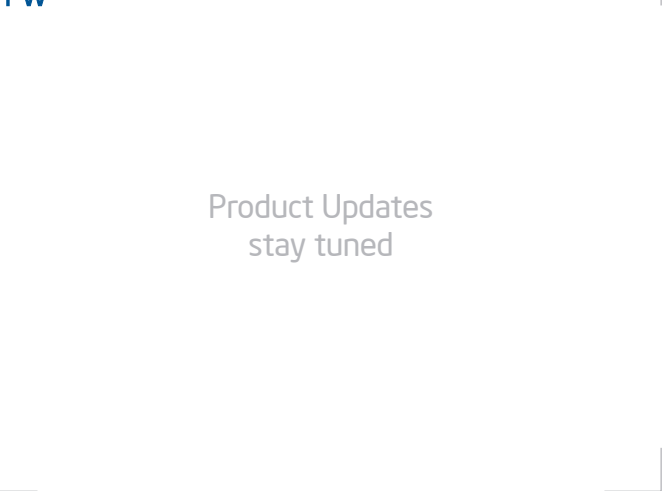

PCIe 5.0 X16 PEX88096 8- M.2 NVMe Expansion Card

Chipset: Broadcom PEX88048 Interface: 8 x M.2 M Key 2280
Transfer rate: 32GT/32Gbps per lane, Max transfer rate up to 64GB/s
Dimension: 312 x 110 mm(PCIe Board) Product weight: 523.3 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
8 x Heat sink, 8 x Screws

PW568



PCIe 3.0 X16 4-Port SFF-8643 NVMe Expansion Card

Chipset: 9DB433AGLF Connector type: 4 x SFF-8643
Transfer rate: Maximum transmit speeds up to 4 GB/s
Dimension: 148 x 69 mm(PCIe Board) Product weight: 63.6 g
Accessories: 1 x SAS SFF-8643 cable (optional), 1 x Anti-static bag
1 x Low profile bracket, 1 x Neutral box

PW538



PCIe 3.0 X8 PEX8749 8-Port SFF-8643 Expansion Card

Chipset: PLX PEX8749 Connector type: 8 x SFF-8643
Transfer rate: Each port with Maximum transmit speeds up to 32Gb/s
Dimension: 160 x 69 mm(PCIe Board) Product weight: 160 g
Accessories: 1 x SAS SFF-8643 cable (optional), 1 x Anti-static bag
1 x Low profile bracket, 1 x Neutral box

PW583



PCIe 3.0 X8 PEX8747 4-Port SFF-8643 Expansion Card

Chipset: PLX PEX8747 Connector type: 4 x SFF-8643
Transfer rate: Each port with Maximum transmit speeds up to 32Gb/s
Dimension: 160 x 69 mm(PCIe Board) Product weight: 160 g
Accessories: 1 x SAS SFF-8643 cable (optional), 1 x Anti-static bag
1 x Low profile bracket, 1 x Neutral box

PW537



PCIe 3.0 X8 PEX8724 4-Port SFF-8643 Expansion Card

Chipset: PLX PEX8724 Connector type: 4 x SFF-8643
Transfer rate: Each port with Maximum transmit speeds up to 32Gb/s
Dimension: 160 x 69 mm(PCIe Board) Product weight: 85.8 g
Accessories: 1 x SAS SFF-8643 cable (optional), 1 x Anti-static bag
1 x Low profile bracket, 1 x Neutral box


PW5117



M.2 M Key(PCle X4) OcuLink SFF-8612 Expansion Card

Chipset: N/A Interface: 1 x OcuLink SFF-8612
Transfer rate: Maximum transmit speeds up to 4 GB/s
Dimension: 22 x 80 mm(M.2 Board) Product weight: 46.9 g
Accessories: 1 x Anti-static bag, 1 x Screw driver, 1 x Neutral box
1 x Oculink SFF-8612 to SFF-8639 cable


PW580

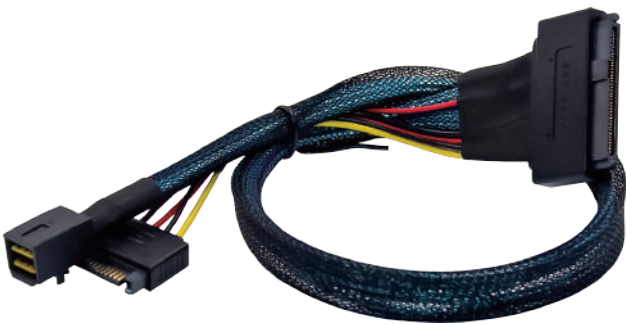

U.2 SFF-8643 to SFF-8639 (1-1) SSD NVMe SAS Cable

Chipset: N/A Connector type: 1 x SFF-8643/SFF-8639
Transfer rate: Maximum transmit speeds up to 12Gb/s
Dimension: SAS NVMe cable length: 50mm (OEM optional length)
Accessories: 1 x Anti-static bag, 1 x Neutral box


PW566

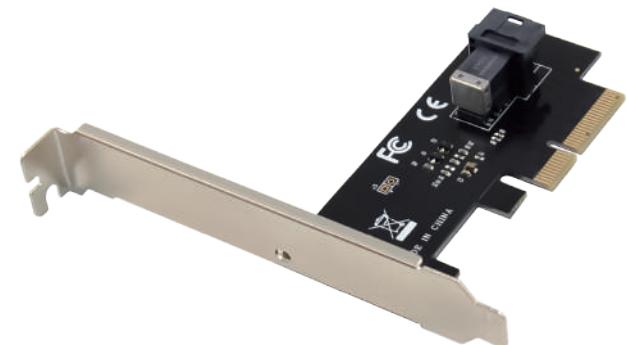

PCIe X4 1-Port SFF-8643 NVMe SSD Expansion Card

Chipset: N/A Connector type: 1 x SFF-8643
Transfer rate: Maximum transmit speeds up to 4 GB/s
Dimension: 90 x 43 mm (PCIe Board) Product weight: 35.7 g
Accessories: 1 x SAS SFF-8643 cable (optional), 1 x Anti-static bag
1 x Low profile bracket, 1 x Neutral box


PW567

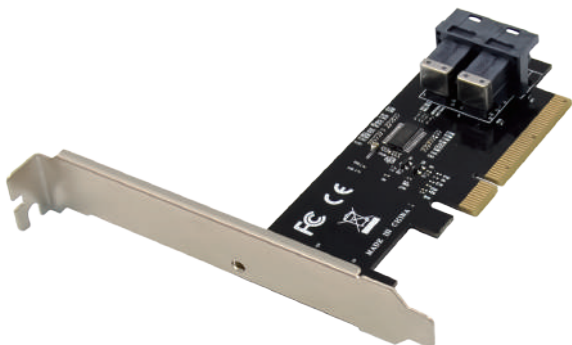

PCIe X8 2-Port SFF-8643 NVMe SSD Expansion Card

Chipset: PI6C20400BLE Connector type: 2 x SFF-8643
Transfer rate: Maximum transmit speeds up to 4 GB/s
Dimension: 105 x 45 mm (PCIe Board) Product weight: 42.3 g
Accessories: 1 x SAS SFF-8643 cable (optional), 1 x Anti-static bag
1 x Low profile bracket, 1 x Neutral box


PW584

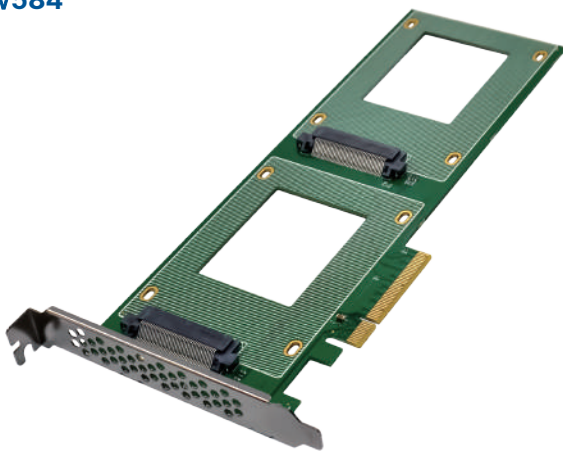

PCIe X8 2-Port U.2 SFF-8639 2.5inch NVMe SSD Card

Chipset: PI6C20400BLE Connector type: 2 x 2.5in SFF-8639
Transfer rate: Maximum transmit speeds up to 4 GB/s
Dimension: 236 x 87 mm (PCIe Board) Product weight: 69.4 g
Accessories: 1 x Anti-static bag, 1 x Screw driver, 4 x Screws
1 x Neutral box


PW574

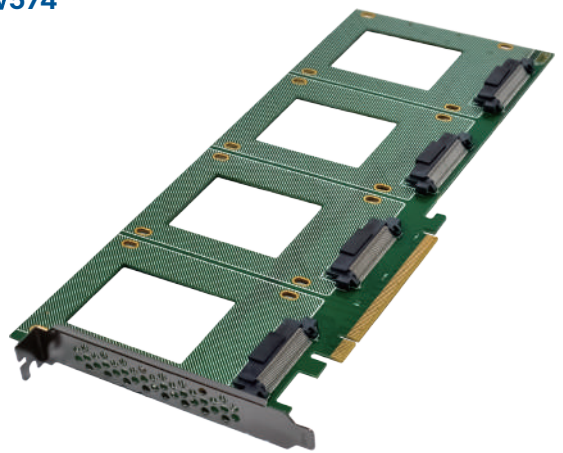

PCIe X16 4-Port U.2 SFF-8639 2.5inch NVMe SSD Card

Chipset: PI6C20400BLE Connector type: 4 x 2.5in SFF-8639
Transfer rate: Maximum transmit speeds up to 4 GB/s
Dimension: 288 x 122 mm (PCIe Board) Product weight: 107.8 g
Accessories: 1 x Anti-static bag, 1 x Screw driver, 8 x Screws
1 x Neutral box


PW517

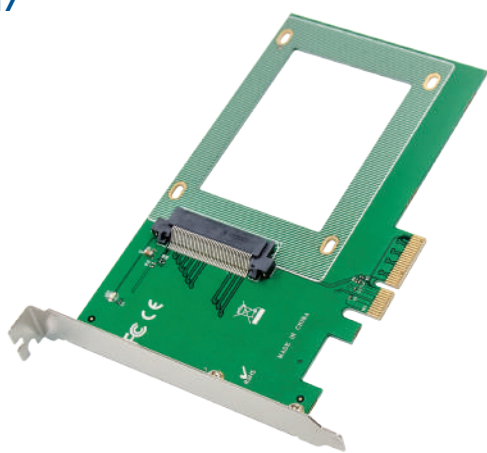

PCIe X4 1-Port U.2 SFF-8639 2.5inch NVMe SSD Card

Chipset: N/A Connector type: 1 x 2.5in SFF-8639
Transfer rate: Maximum transmit speeds up to 4 GB/s
Dimension: 150 x 95 mm (PCIe Board) Product weight: 48.4 g
Accessories: 1 x Screw driver, 1 x Screws, 1 x Anti-static bag
1 x Neutral box

PW518

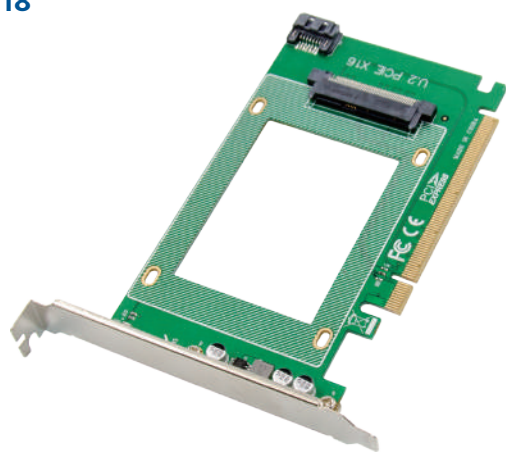

PCIe 3.0 X8 PEX8724 4-Port SFF-8643 Expansion Card

Chipset: N/A Connector type: 1 x 2.5in SFF-8639
Transfer rate: Maximum transmit speeds up to 4 GB/s
Dimension: 145 x 85 mm (PCIe Board) Product weight: 55.7 g
Accessories: 1 x Screw driver, 1 x Screws, 1 x Anti-static bag
1 x SATA cable, 1 x Neutral box

PW5118



PCIe 5.0 X16 4-Port Hyper M.2 NVMe SSD Splitter Card

Chipset: PI6CB33402 Interface: 4 x M.2 M Key 2280
Transfer rate: Maximum transmit speeds up to 4 GB/s per port
Dimension: 144 x 111 mm(PCIe Board) Product weight: 107.6 g
Accessories: 1 x Anti-static bag, 1 x Screw driver, 4 x Screws
4 x Heat sink, 1 x Neutral box


PW575



PCIe 3.0 X16 4-Port Hyper M.2 NVMe SSD Splitter Card

Chipset: PI6C20400BLE Interface: 4 x M.2 M Key 2280
Transfer rate: Maximum transmit speeds up to 4 GB/s per port
Dimension: 169 x 68 mm(PCIe Board) Product weight: 59.8 g
Accessories: 1 x Low profile bracket, 1 x Screw driver, 4 x Screws
4 x Heat sink, 1 x Anti-static bag, 1 x Neutral box


PW573

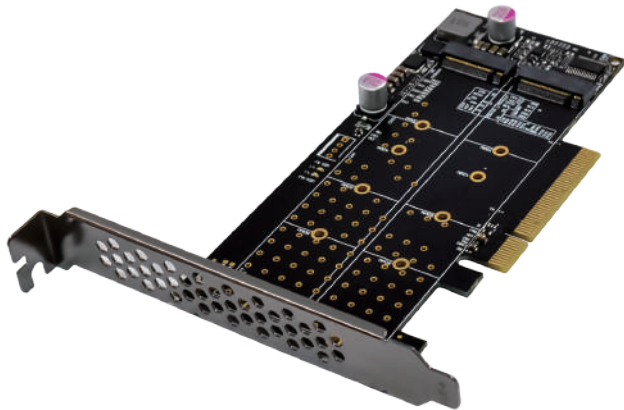

PCIe 3.0 X8 2-Port Hyper M.2 NVMe SSD Splitter Card

Chipset: PI6C20400BLE Interface: 4 x M.2 M Key 22110
Transfer rate: Maximum transmit speeds up to 4 GB/s per port
Dimension: 135 x 68 mm(PCIe Board) Product weight: 48.5 g
Accessories: 1 x Low profile bracket, 1 x Screw driver, 2 x Screws
2 x Heat sink, 1 x Anti-static bag, 1 x Neutral box


PW589

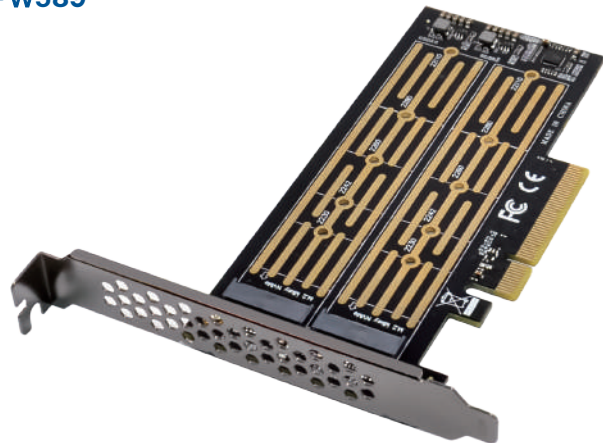

PCIe 3.0 X8 2-Port Hyper M.2 NVMe SSD Splitter Card

Chipset: SL28PCIe14 Interface: 4 x M.2 M Key 22110
Transfer rate: Maximum transmit speeds up to 4 GB/s per port
Dimension: 140 x 68 mm(PCIe Board) Product weight: 46.1 g
Accessories: 1 x Low profile bracket, 1 x Screw driver, 2 x Screws
2 x Heat sink, 1 x Anti-static bag, 1 x Neutral box


PW597

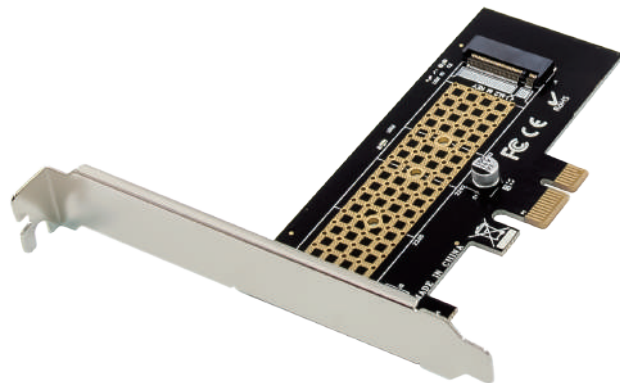

PCIe X1 Single-Port M.2 M NVMe SSD Expansion Card

Chipset: N/A Interface: 1 x M.2 M Key 2280
Transfer rate: Maximum transmit speeds up to 4 GB/s
Dimension: 95 x 52 mm(PCIe Board) Product weight: 32.3 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
1 x Low profile bracket, 1 x Heat sink, 1 x Screws


PW534

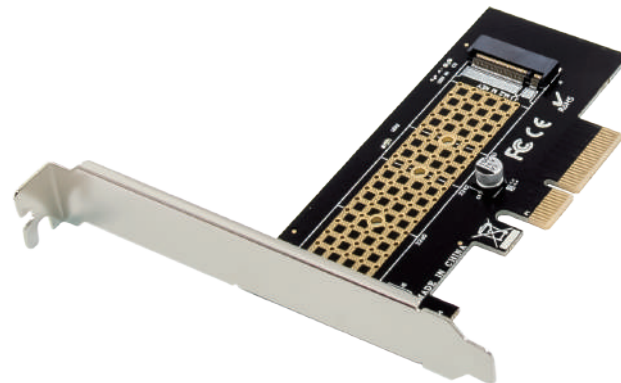

PCIe X4 Single-Port M.2 M NVMe SSD Expansion Card

Chipset: N/A Interface: 1 x M.2 M Key 2280
Transfer rate: Maximum transmit speeds up to 4 GB/s
Dimension: 95 x 52 mm(PCIe Board) Product weight: 34.3 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
1 x Low profile bracket, 1 x Heat sink, 1 x Screws


PW545

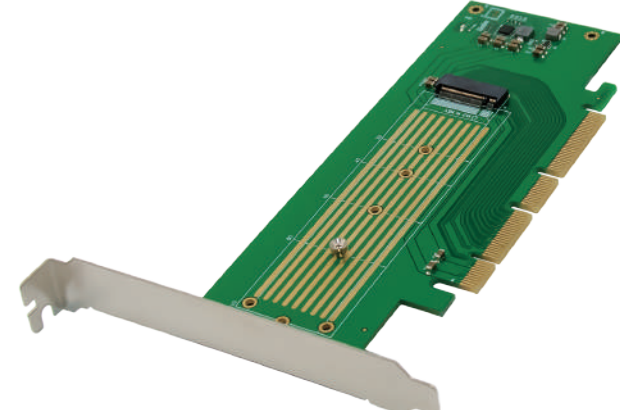

PCIe X4X8X16 Single- M.2 NVMe SSD Expansion Card

Chipset: N/A Interface: 1 x M.2 M Key 2280
Transfer rate: Maximum transmit speeds up to 4 GB/s
Dimension: 169 x 58 mm(PCIe Board) Product weight: 55.8 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
1 x Low profile bracket, 1 x Heat sink, 1 x Screws


PW570

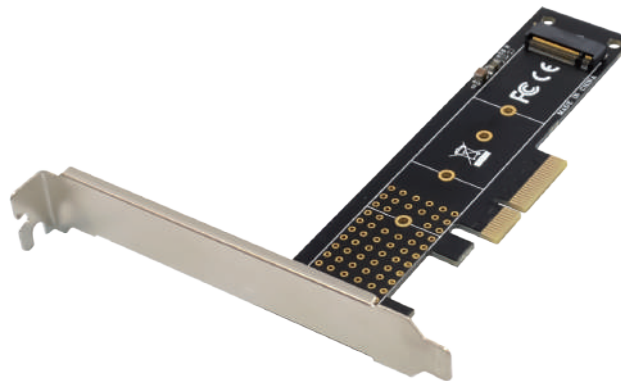

PCIe X4 Single-Port M.2 M NVMe SSD Expansion Card

Chipset: N/A Interface: 1 x M.2 M Key 22110
Transfer rate: Maximum transmit speeds up to 4 GB/s
Dimension: 148 x 52 mm(PCIe Board) Product weight: 35.8 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
1 x Low profile bracket, 1 x Heat sink, 1 x Screws

PW531

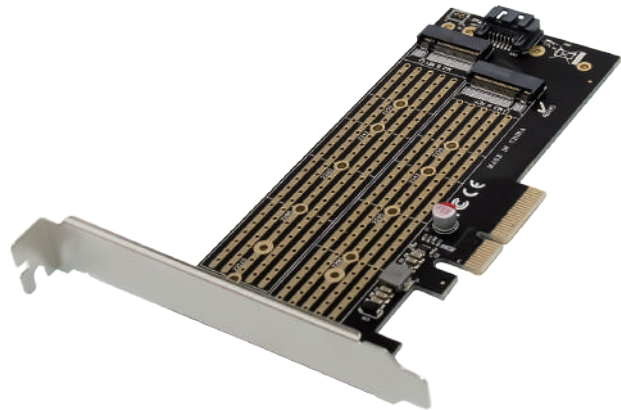

PCIe X4 M.2 B & M.2 M Key NGFF SSD Expansion Card

Chipset: N/A Interface: 1 x M.2 M Key 22110
Transfer rate: transmit speeds up to 6Gb/s 1 x M.2 B Key 22110
Dimension: 140 x 68 mm(PCIe Board) Product weight: 46.3 g
Accessories: 1 x Screw driver, 1 x SATA-III Cable, 1 x Neutral box
1 x Low profile bracket, 2 x Heat sink, 2 x Screws


PW533



PCIe X16 M.2 B/M & mSATA NGFF SSD Expansion Card

Chipset: N/A Interface: 1 x M.2 B/M Key 2280
Transfer rate: transmit speeds up to 6Gb/s 1 x mSATA SSD Port
Dimension: 169 x 68 mm(PCIe Board) Product weight: 55.7 g
Accessories: 1 x Screw driver, 1 x SATA-III Cable, 1 x Neutral box
1 x Low profile bracket, 2 x Heat sink, 3 x Screws


PW59

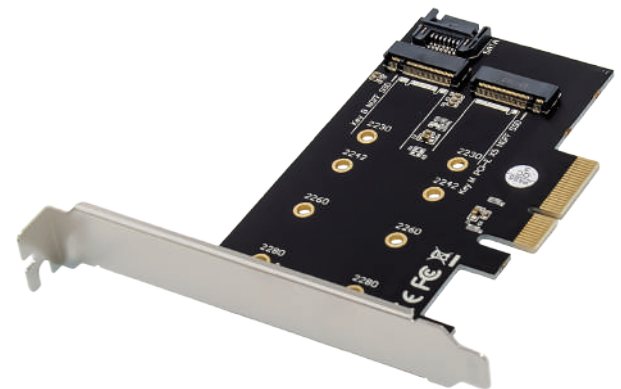

PCIe X4 M.2 B & M.2 M Key NGFF SSD Expansion Card

Chipset: N/A Interface: 1 x M.2 M Key 2280
Transfer rate: transmit speeds up to 6Gb/s 1 x M.2 B Key 2280
Dimension: 169 x 58 mm(PCIe Board) Product weight: 41.2 g
Accessories: 1 x Screw driver, 1 x SATA-III Cable, 1 x Neutral box
1 x Low profile bracket, 2 x Heat sink, 2 x Screws


PW5101

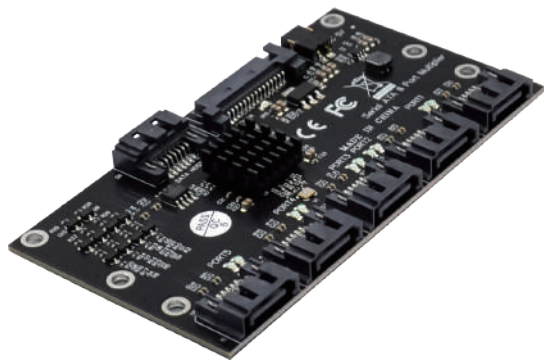

JMB575 1 to 5-Port SATA III Port Multiplier Expansion

Chipset: JMicron JMB575 Interface: 6 x SATA-III Port
Transfer rate: Maximum transmit speeds up to 6Gb/s
Power supply: Built-in SATA 15pin or USB power connector
Dimension: 103 x 55 mm(SATA Board) Product weight: 95.3 g
Accessories: 1 x USB power cable, 1 x SATA-III Cable, 1 x Neutral box


PW529

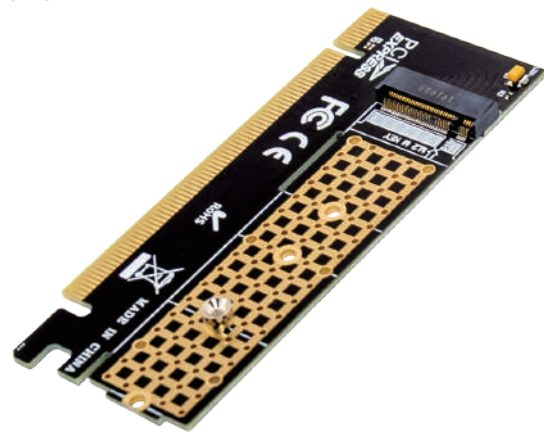

PCIe X16 Single-Port M.2 M NVMe SSD Expansion Card

Chipset: N/A Interface: 1 x M.2 M Key 2280
Transfer rate: Maximum transmit speeds up to 4 GB/s
Dimension: 98 x 40 mm(PCIe Board) Product weight: 23.2 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
1 x Heat sink, 1 x Screws


PW571

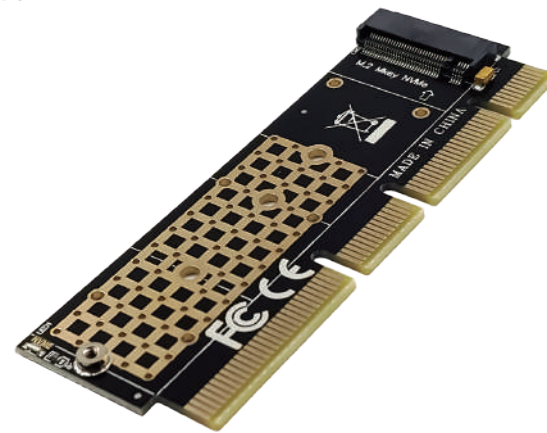

PCIe X4X8X16 Single M.2 M NVMe SSD Expansion Card

Chipset: N/A Interface: 1 x M.2 M Key 2280
Transfer rate: Maximum transmit speeds up to 4 GB/s
Dimension: 98 x 32 mm(PCIe Board) Product weight: 19.2 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
1 x Heat sink (Aluminum case optional), 1 x Screws

PW522

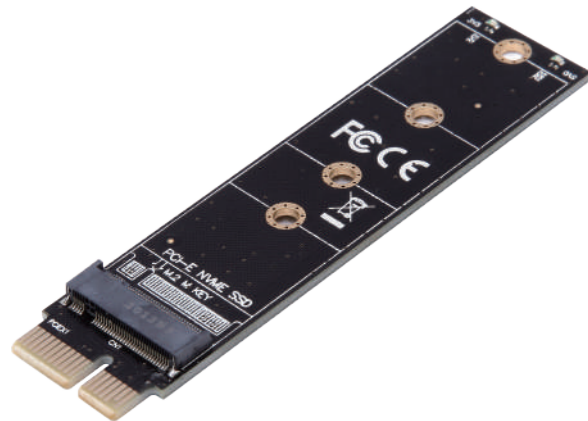

PCIe X1 Single-M.2 M NVMe SSD Expansion Card 2280

Chipset: N/A Interface: 1 x M.2 M Key 2280
Transfer rate: Maximum transmit speeds up to 4 GB/s
Dimension: 98 x 23 mm(PCIe Board) Product weight: 8.8 g
Accessories: 1 x Anti-static bag, 1 x Neutral box, 1 x Screw driver
1 x Screws, 1 x Heat Sink

PW569



M.2 M Single-Port SFF-8643 NVMe SSD Adapter Card

Chipset: N/A Connector type: 1 x SFF-8643
Transfer rate: Maximum transmit speeds up to 4 GB/s
Dimension: 22 x 60 mm(PCIe Board) Product weight: 6.8 g
Accessories: 1 x Anti-static bag, 1 x Neutral box


PW5103



M.2 B Key NGFF SSD Converter MacBook(2013-2017)

Chipset: N/A Interface: 1 x M.2 B Key 2280
Transfer rate: transmit speeds up to 6Gbps
Dimension: 22 x 80 mm(M.2 Board) Product weight: 13.4 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
1 x Heat sink, 1 x Screws


PW519

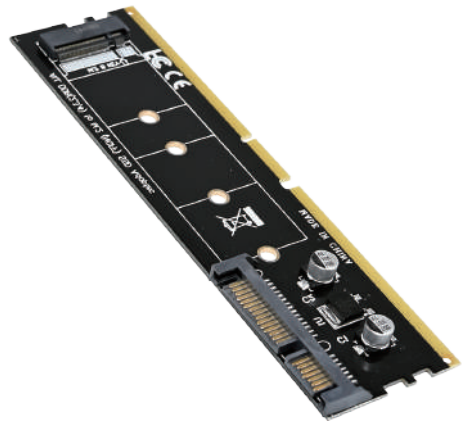

DDR 2/ 3/ 4 to M.2 B Key NGFF SSD Memory Converter

Chipset: N/A Interface: 1 x M.2 B Key 2280
Transfer rate: transmit speeds up to 6Gbps
Dimension: 148 x 69 mm(M.2 Board) Product weight: 15.7 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
1 x Heat sink, 1 x Screws


PW527

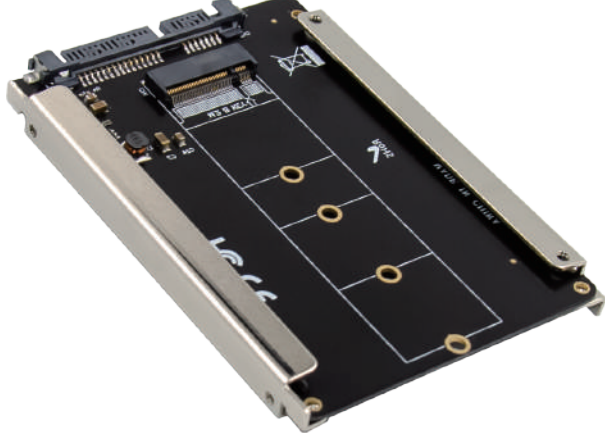

2.5inch SATA III to M.2 B Key NGFF SSD Converter Card

Chipset: N/A Interface: 1 x M.2 B Key 2280
Transfer rate: transmit speeds up to 6Gbps
Dimension: 98 x 68 mm(SATA Board) Product weight: 44.3 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
2 x Low profile bracket, 1 x Heat sink, 1 x Screws


PW528

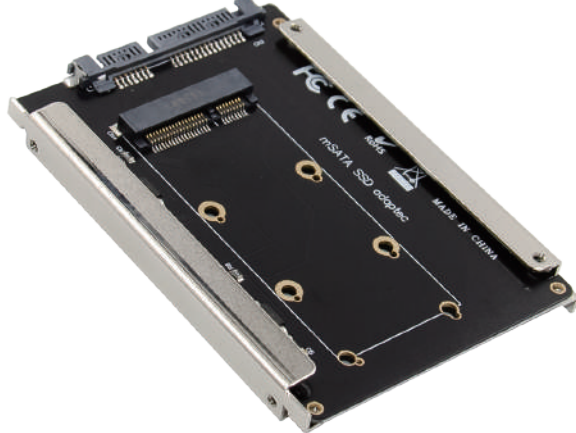

2.5inch SATA III to mSATA NGFF SSD Converter Card

Chipset: N/A Interface: 1 x mSATA SSD Port
Transfer rate: transmit speeds up to 6Gbps
Dimension: 98 x 68 mm(SATA Board) Product weight: 44.3 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
2 x Low profile bracket, 1 x Screws


PW524

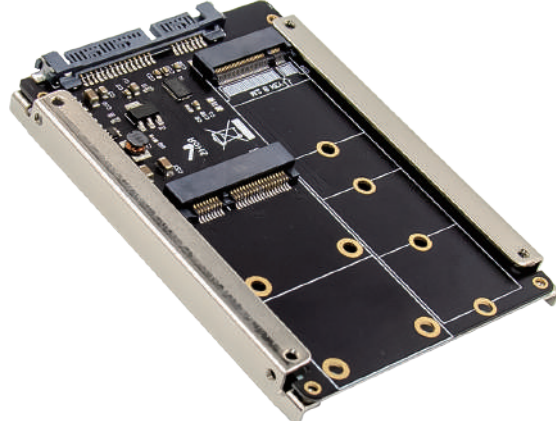

2.5inch SATA III to M.2 B & mSATA SSD Converter Card

Chipset: N/A Interface: 1 x mSATA SSD Port
Transfer rate: transmit speeds up to 6Gbps 1 x M.2 B Key 2280
Dimension: 98 x 68 mm(SATA Board) Product weight: 47.1 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
2 x Low profile bracket, 1 x Heat sink, 1 x Screws


PW526

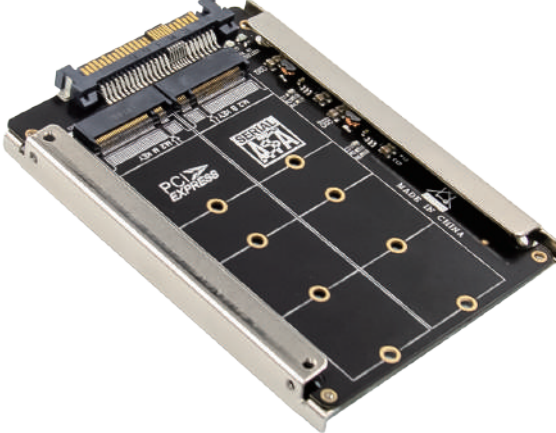

2.5inch U.2 SFF-8639 to M.2 NGFF SSD Converter Card

Chipset: N/A Interface: 1 x M.2 B Key 2280
Transfer rate: transmit speeds up to 6Gbps 1 x M.2 M Key 2280
Dimension: 98 x 68 mm(U.2 Board) Product weight: 45.9 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
2 x Low profile bracket, 2 x Heat sink, 1 x Screws


PW523

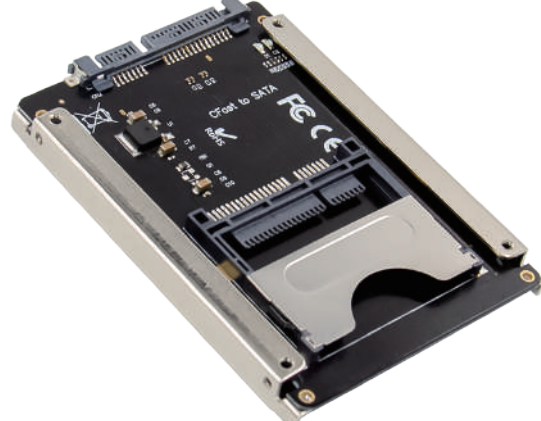

2.5inch SATA III to CFast NGFF SSD Memory Converter

Chipset: N/A Interface: 1 x CFast Type I port
Transfer rate: transmit speeds up to 6Gbps
Dimension: 98 x 68 mm(SATA Board) Product weight: 23.2 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
2 x Low profile bracket, 1 x Screws

PW525

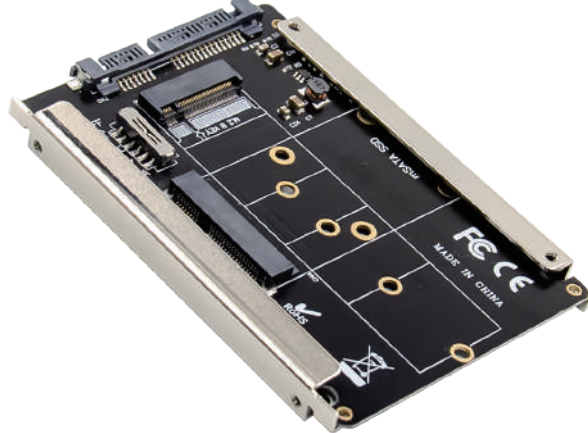

2.5inch SATA III to M.2 B & mSATA SSD Converter Card

Chipset: N/A Interface: 1 x mSATA SSD Port
Transfer rate: transmit speeds up to 6Gbps 1 x M.2 B Key 2280
Dimension: 98 x 68 mm(SATA Board) Product weight: 47.1 g
Accessories: 1 x Screw driver, 1 x Anti-static bag, 1 x Neutral box
2 x Low profile bracket, 1 x Heat sink, 1 x Screws

PW585



PCIe x16 ASM1166 24-Port SATA 6Gbps Expansion Card

Chipset: ASM1166 + Interface: 24 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 190 x 98 mm (PCIe Board) Product weight: 142.6 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box
2 x SATA cable (optional)

PW588



PCIe X4X8X16 ASM1064 24 x SATA III Expansion Card

Chipset: ASM1064 + ASM1812 Interface: 24 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 165 x 90 mm (PCIe Board) Product weight: 134 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box
2 x SATA cable (optional)

PW595



PCIe x1 ASM1064 20-Port SATA 6Gbps Expansion Card

Chipset: ASM1064 + JMB575 Interface: 20 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 153 x 69 mm (PCIe Board) Product weight: 98.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x SATA cable (optional), 1 x Neutral box

PW594




PCIe x1 ASM1064 16-Port SATA 6Gbps Expansion Card

Chipset: ASM1064 + JMB575 Interface: 16 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 120 x 67 mm (PCIe Board) Product weight: 88 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x SATA cable (optional), 1 x Neutral box

PW564

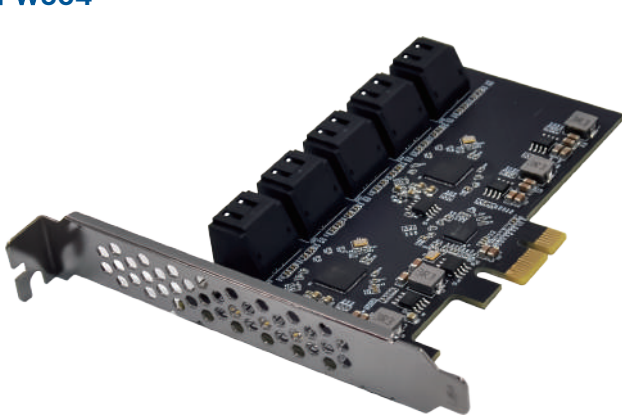


PCIe x1 JMB582 10-Port SATA III 6Gbps Expansion Card

Chipset: JMB582 + JMB575 Interface: 10 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 157 x 69 mm (PCIe Board) Product weight: 56.4 g
Accessories: 1 x Low profile bracket, 1 x Anti-static bag, 1 x Neutral box
2 x SATA cable (optional)

PW565

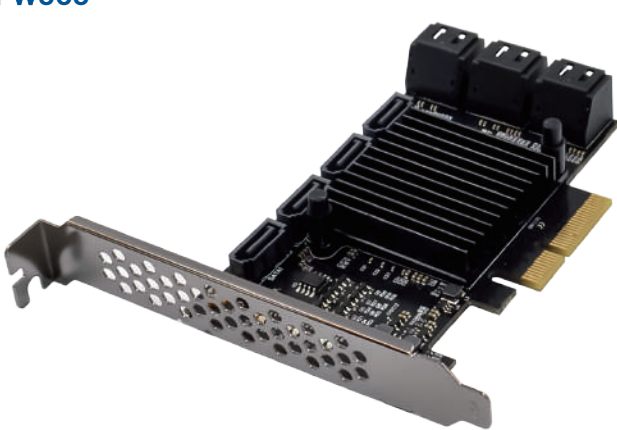

PCIe x4 ASM1166 10-Port SATA 6Gbps Expansion Card

Chipset: ASM1166 + JMB575 Interface: 10 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 108 x 58 mm (PCIe Board) Product weight: 67.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x SATA cable (optional), 1 x Neutral box

PW562




PCIe x1 88SE9215 8-Port SATA 6Gbps Expansion Card

Chipset: 88SE9215 + JMB575 Interface: 8 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 95 x 67 mm (PCIe Board) Product weight: 64.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x SATA cable (optional), 1 x Neutral box

PW555

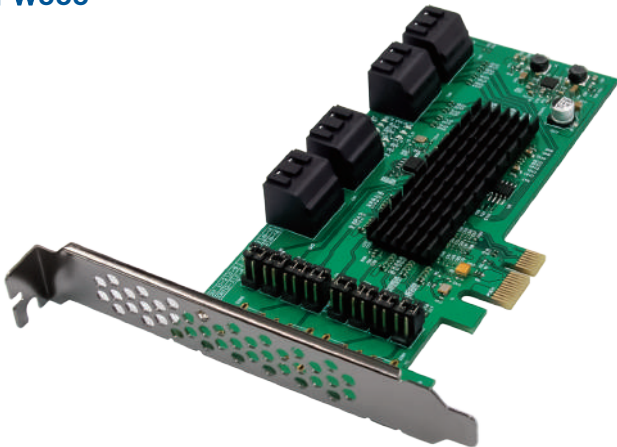


PCIe x1 88SE9215 8-Port SATA 6Gbps Expansion Card

Chipset: 88SE9215 + 88SM9705 Interface: 8 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 139 x 67 mm (PCIe Board) Product weight: 68 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x SATA cable (optional), 1 x Neutral box

PW553

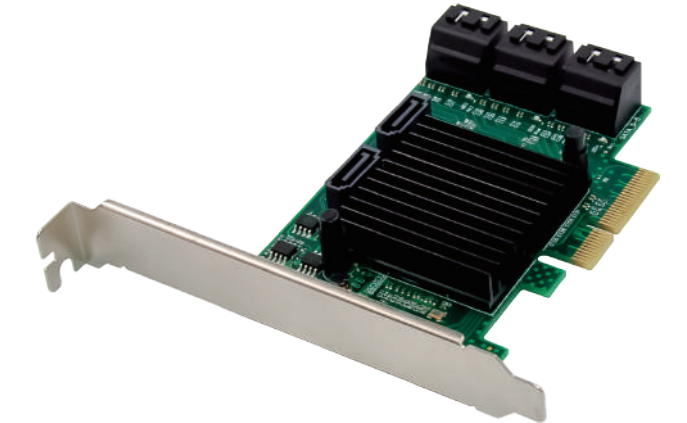

PW

Product Updates
stay tuned

PCIe x4 ASM1061 8-Port SATA III 6Gbps Expansion Card PCIe x4 ASM1064 8-Port SATA III 6Gbps Expansion Card


Chipset: ASM1061 + ASM1806 Interface: 8 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 95 x 67 mm (PCIe Board) Product weight: 66.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x SATA cable (optional), 1 x Neutral box

Chipset: ASM1064 + JMB575 Interface: 8 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: x mm (PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x SATA cable (optional), 1 x Neutral box

PW546

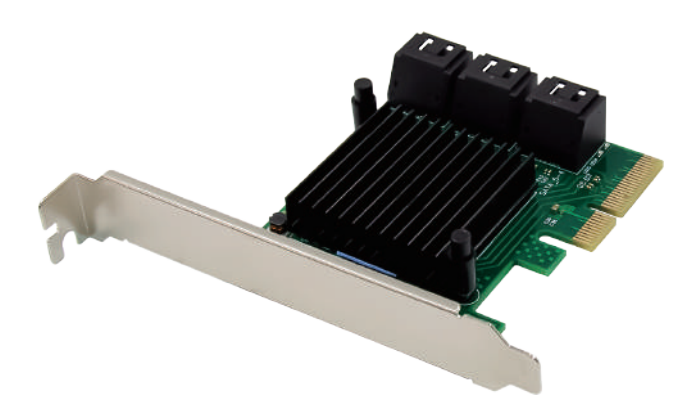

PW592



PCIe x4 ASM1062 Six-Port SATA 6Gbps Expansion Card PCIe x1 ASM1061 Six-Port SATA 6Gbps Expansion Card

Chipset: ASM1062 + ASM1093 Interface: 6 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 78 x 60 mm (PCIe Board) Product weight: 60 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x SATA cable (optional), 1 x Neutral box

Chipset: ASM1061 + JMB575 Interface: 6 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 79 x 68 mm (PCIe Board) Product weight: 61.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x SATA cable (optional), 1 x Neutral box

PW



Product Updates
stay tuned

PCIe x1 ASM1164 4-Port SATA III 6Gbps Expansion Card PCIe x4 ASM1166 Six-Port SATA 6Gbps Expansion Card


Chipset: ASMedia ASM1164 Interface: 4 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: x mm (PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x SATA cable (optional), 1 x Neutral box


Chipset: ASMedia ASM1166 Interface: 6 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 79 x 68 mm (PCIe Board) Product weight: 72.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x SATA cable (optional), 1 x Neutral box

PW576

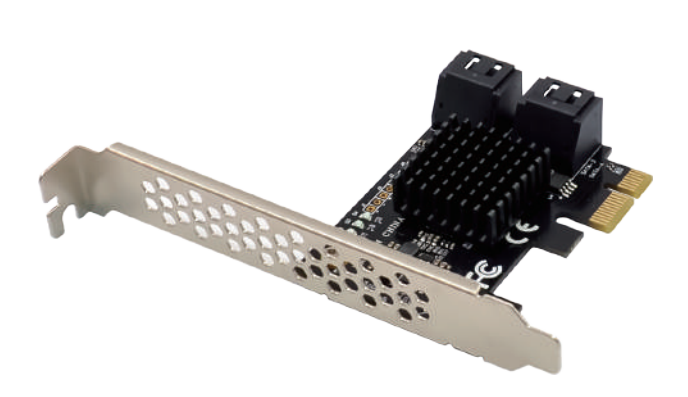

PW540

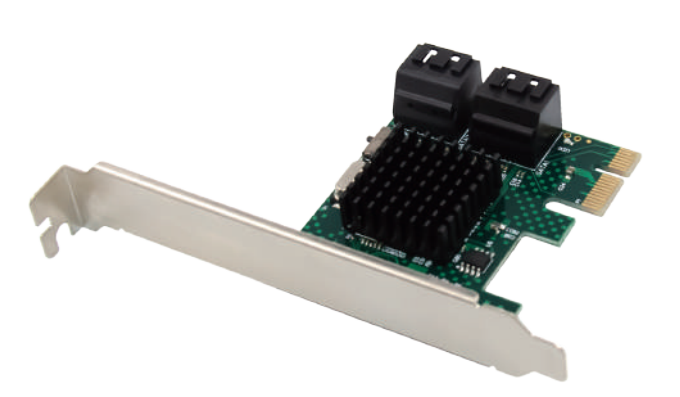

Working Mode: Support IDE/AHCI

PCIe x1 ASM1064 4-Port SATA III 6Gbps Expansion Card PCIe x1 ASM1061 4-Port SATA III 6Gbps Expansion Card

Chipset: ASMedia ASM1064 Interface: 4 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 70 x 53 mm (PCIe Board) Product weight: 35.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x SATA cable (optional), 1 x Neutral box

Chipset: ASMedia ASM1061 Interface: 4 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 65 x 56 mm (PCIe Board) Product weight: 37.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x SATA cable (optional), 1 x Neutral box

PW57




PCIe x4 88SE9230 2-Port 2.5in Hard Drives RAID Card

Chipset: Marvell 88SE9230 Interface: 2 x 2.5inch HDD port
Transfer rate: Communication speeds up to 6Gbps

Dimension: 170 x 120 mm (PCIe Board) Product weight: 89 g
Accessories: 1 x CD-Driver, 1 x Screw driver, 1 x Anti-static bag
8 x Screws, 1 x Neutral box

PW563

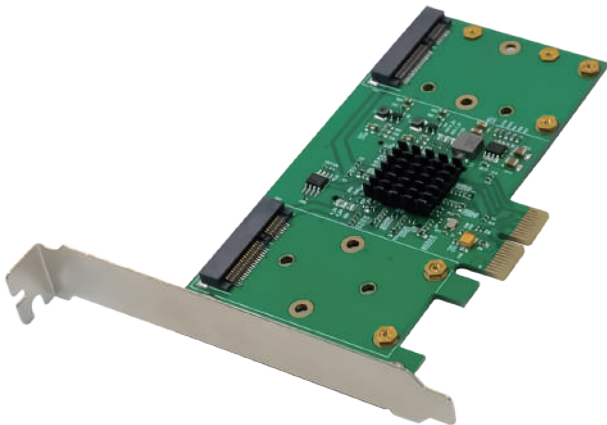


PCIe x2 88SE9230 4-Port 6Gbps mSATA SSD RAID Card

Chipset: Marvell 88SE9230 Interface: 2 x mSATA SSD port
Transfer rate: Communication speeds up to 6Gbps

Dimension: 126 x 70 mm (PCIe Board) Product weight: 56.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Screw driver, 4 x Screws, 1 x Neutral box

PW52

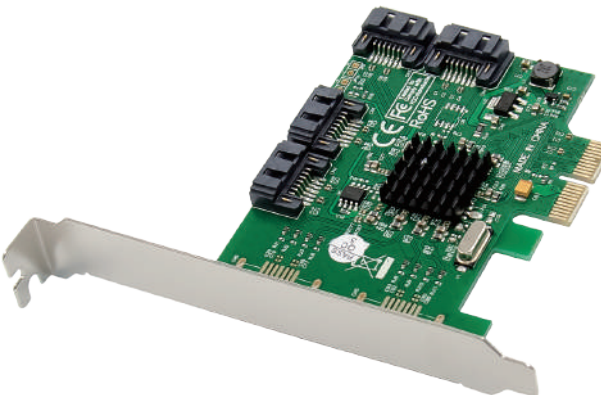


PCIe x2 88SE9230 4-SATA 6Gbps RAID Expansion Card

Chipset: Marvell 88SE9230 Interface: 4 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 95 x 69 mm (PCIe Board) Product weight: 40.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x SATA cable (optional), 1 x Neutral box

PW54

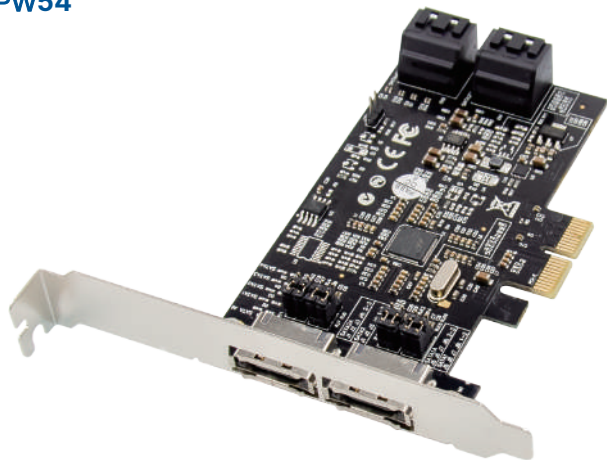


PCIe x2 88SE9230 SATA III 2e4T RAID Expansion Card

Chipset: Marvell 88SE9230 Interface: 2 x eSATA & 4 x SATA3.0
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 110 x 67 mm (PCIe Board) Product weight: 49.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x SATA cable (optional), 1 x Neutral box

PW542

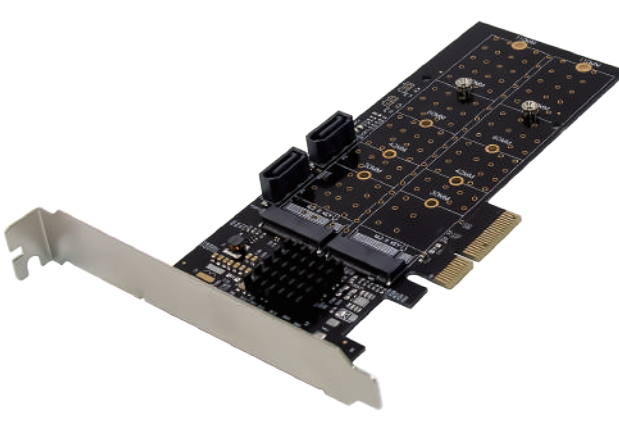


PCIe x4 88SE9215 M.2 B & SATA 6Gbps Expansion Card

Chipset: Marvell 88SE9215 Interface: 2 x M.2 B & 2 x SATA3.0
Transfer rate: Communication speeds up to 6Gbps

Dimension: 157 x 69 mm (PCIe Board) Product weight: 56.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Screw driver, 2 x Screws, 2 x Heat sink, 1 x Neutral box

PW541

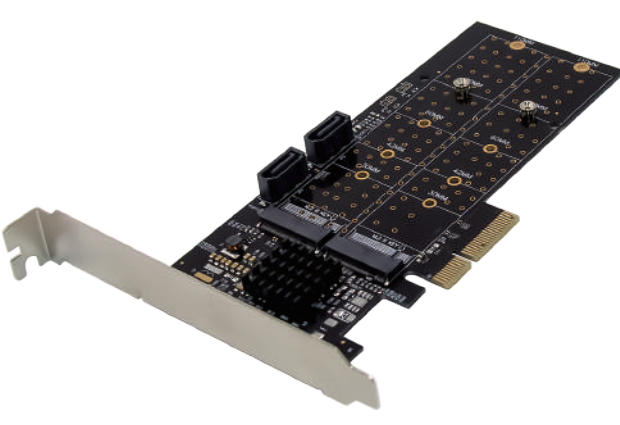


PCIe x4 88SE9230 M.2 B Key & SATA 6Gbps RAID Card

Chipset: Marvell 88SE9230 Interface: 2 x M.2 B & 2 x SATA3.0
Transfer rate: Communication speeds up to 6Gbps

Dimension: 157 x 69 mm (PCIe Board) Product weight: 56.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Screw driver, 2 x Screws, 2 x Heat sink, 1 x Neutral box

PW561

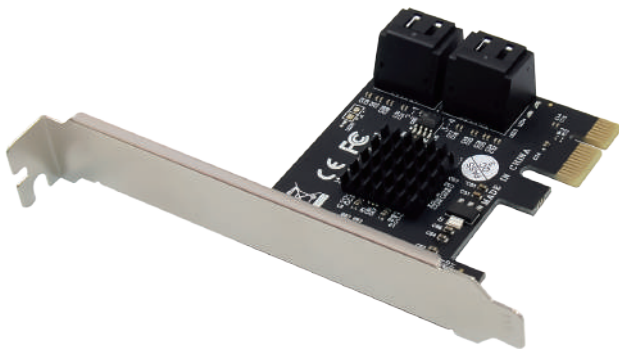


PCIe x1 88SE9215 4-Port SATA 6Gbps Expansion Card

Chipset: Marvell 88SE9215 Interface: 4 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 65 x 57 mm (PCIe Board) Product weight: 35.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x SATA cable (optional), 1 x Neutral box

PW53

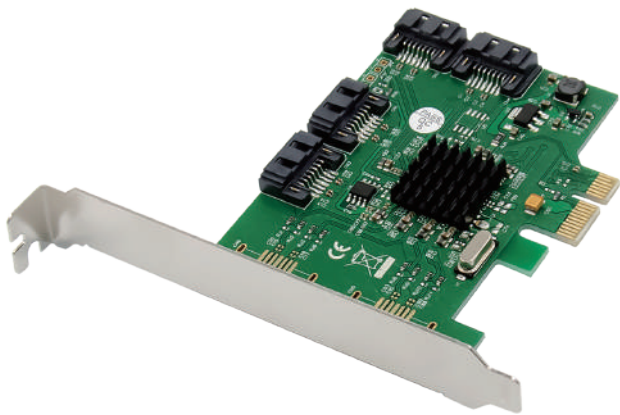


PCIe x1 88SE9215 4-Port SATA 6Gbps Expansion Card

Chipset: Marvell 88SE9215 Interface: 4 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 95 x 69 mm (PCIe Board) Product weight: 39.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x SATA cable (optional), 1 x Neutral box


PW56

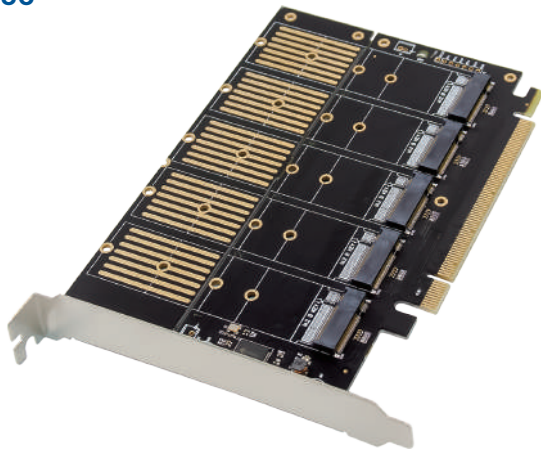

PCIe x16 JMB585 5-Port M.2 B SATA III Expansion Card

Chipset: JMicron JMB585 Interface: 5 x M.2 Key B
Transfer rate: Communication speeds up to 6Gbps
Dimension: 149 x 105/67 mm (PCIe Board) Product weight: 78.2 g
Accessories: 1 x Low profile bracket, 5 x Heat sink, 2 x SATA-III cable
1 x Screw driver, 5 x Screws, 5 x M.2 to SATA Board, 1 x Neutral box


PW539

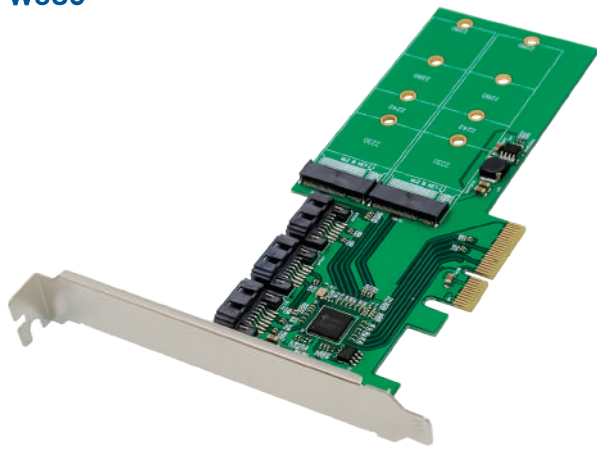

PCIe x4 JMB585 M.2 B&SATA III 6Gbps Expansion Card

Chipset: JMicron JMB585 Interface: 2 x M.2 B & 3 x SATA3.0
Transfer rate: Communication speeds up to 6Gbps
Dimension: 155 x 69 mm (PCIe Board) Product weight: 56.3 g
Accessories: 1 x Low profile bracket, 2 x Heat sink, 1 x SATA-III cable
1 x Screw driver, 2 x Screws, 1 x Neutral box


PW516

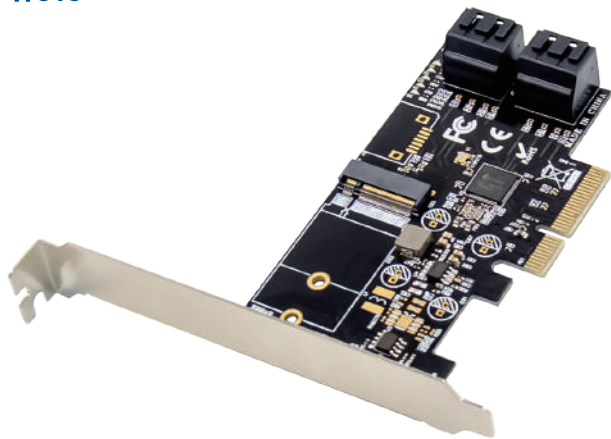

PCIe x4 JMB585 M.2 B&SATA III 6Gbps Expansion Card

Chipset: JMicron JMB585 Interface: 1 x mSATA & 4 x SATA3.0
Transfer rate: Communication speeds up to 6Gbps
Dimension: 103 x 58 mm (PCIe Board) Product weight: 41.3 g
Accessories: 1 x Low profile bracket, 1 x Anti-static bag, 1 x Neutral box
1 x Screwdriver, 1 x Screws, 2 x SATA cable (optional)


PW548

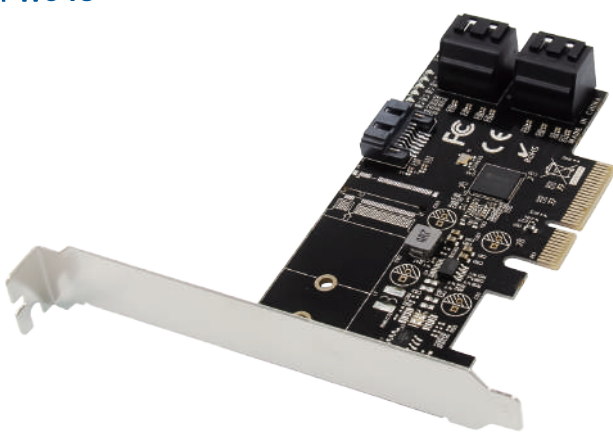

PCIe x2 88SE9230 SATA III 2e4T RAID Expansion Card

Chipset: JMicron JMB585 Interface: 5 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps
Dimension: 103 x 58 mm (PCIe Board) Product weight: 40 g
Accessories: 1 x Low profile bracket, 1 x Anti-static bag, 1 x Neutral box
2 x SATA cable (optional)


PW543

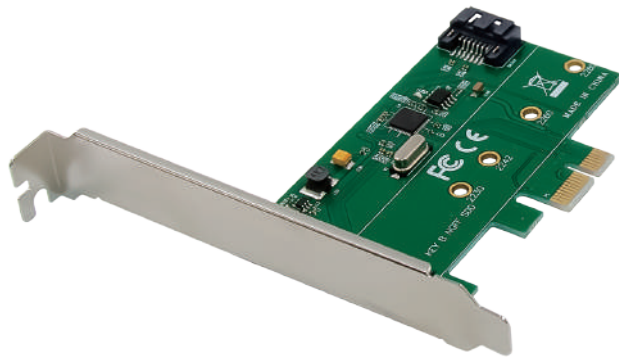

PCIe x1 ASM1061 M.2 B & SATA 6Gbps Expansion Card

Chipset: ASMedia ASM1061 Interface: 1 x M.2 B & SATA 3.0
Transfer rate: Communication speeds up to 6Gbps
Dimension: 88 x 45 mm (PCIe Board) Product weight: 32.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x SATA-III cable
1 x Screw driver, 1 x Screws, 1 x Heat sink, 1 x Neutral box


PW58

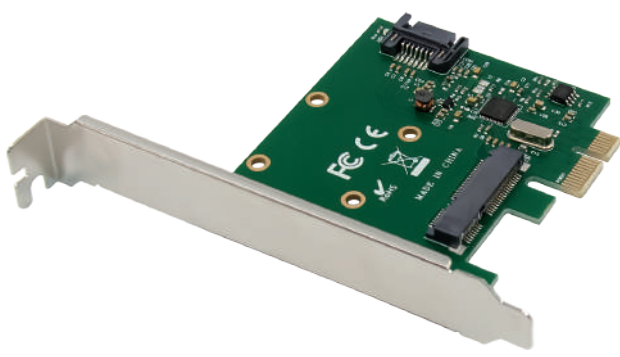

PCIe x1 ASM1061 mSATA&SATA 6Gbps Expansion Card

Chipset: ASMedia ASM1061 Interface: 1 x mSATA & SATA 3.0
Transfer rate: Communication speeds up to 6Gbps
Dimension: 78 x 69 mm (PCIe Board) Product weight: 76.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x SATA-III cable, 1 x Neutral box


PW550

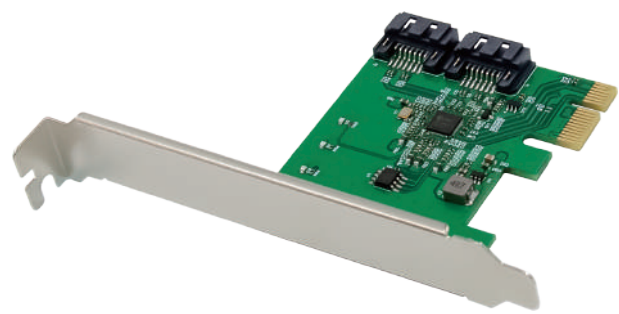

PCIe X1 JMB582 2-Port SATA III 6Gbps Expansion Card

Chipset: JMicron JMB582 Interface: 2 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps
Dimension: 95 x 67 mm (PCIe Board) Product weight: 33.7 g
Accessories: 1 x Low profile bracket, 1 x Anti-static bag, 1 x Neutral box
1 x SATA-III cable (optional)


PW5108

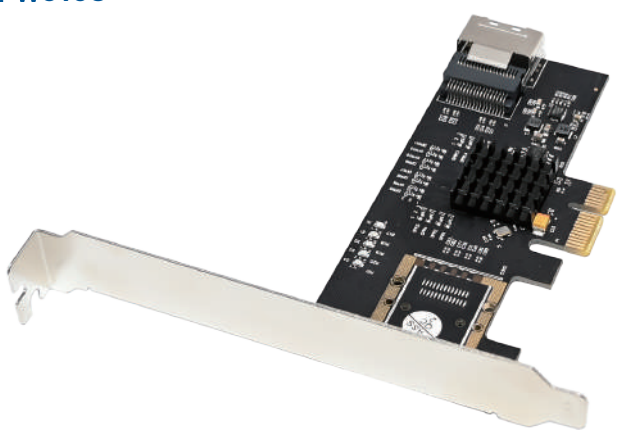

PCIe x1 88SE9215 SAS TO SATA 6Gbps Expansion Card

Chipset: Marvell 88SE9215 Interface: SAS to 4 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps
Dimension: 100 x 48 mm (PCIe Board) Product weight: 35.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x SAS 36pin to 4-Port SATA cable: 50cm, 1 x Neutral box


PW55

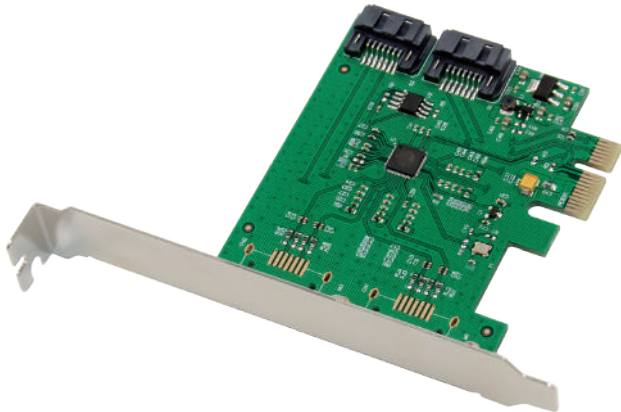

PCle X1 88SE9170 2-Port SATA 6Gbps Expansion Card

Chipset: Marvell 88SE9170 Interface: 2 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps
Dimension: 95 x 69 mm (PCle Board) Product weight: 34.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x SATA cable (optional), 1 x Neutral box


PW590

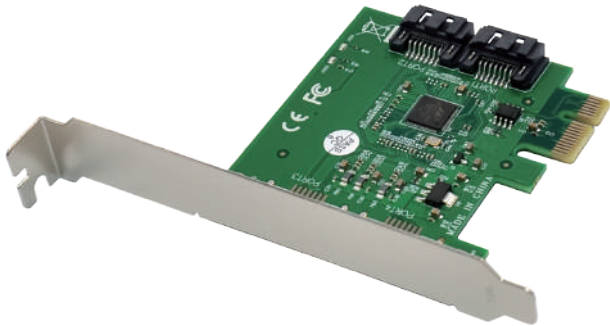

PCle X1 88SE9215 2-Port SATA 6Gbps Expansion Card

Chipset: Marvell 88SE9215 Interface: 2 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps
Dimension: 72 x 67 mm (PCle Board) Product weight: 34.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x SATA cable (optional), 1 x Neutral box


PW544

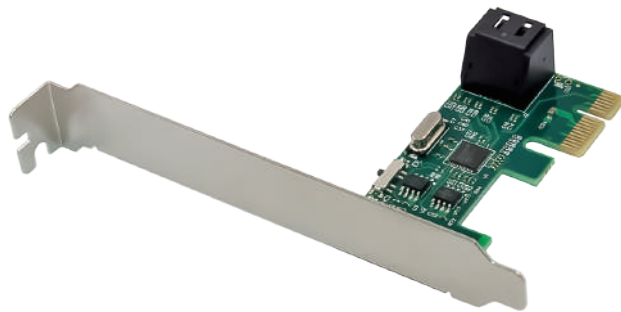

PCle x1 ASM1061 2-Port SATA III 6Gbps Expansion Card

Chipset: Marvell 88SE9230 Interface: 2 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps
Dimension: 65 x 39 mm (PCle Board) Product weight: 26.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x SATA cable (optional), 1 x Neutral box

PW547

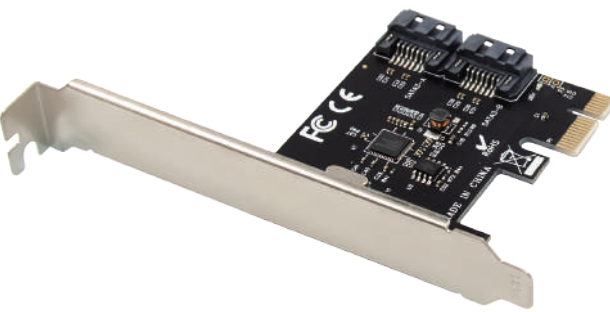


PCle x1 ASM1061 2-Port SATA III 6Gbps Expansion Card

Chipset: ASMedia ASM1061 Interface: 2 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps
Dimension: 65 x 57 mm (PCle Board) Product weight: 35.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x SATA cable (optional), 1 x Neutral box

Working Mode: Support IDE/AHCI


PW510

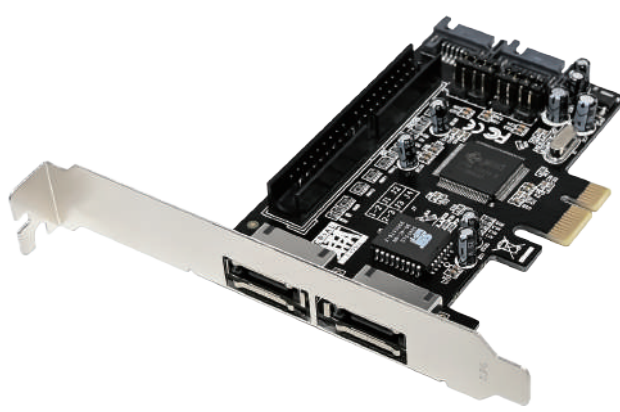

PCle x1 JMB363 2e2T + PATA SATA II 3Gbps RAID Card

Chipset: SiLiconImage Sil3132 Interface: 2 x eSATA & 2 x SATA II
Transfer rate: Communication speeds of 3Gbps, 1.5Gbps
Dimension: 97 x 69 mm (PCle Board) Product weight: 48.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x SATA cable (optional), 1 x Neutral box

PW5102

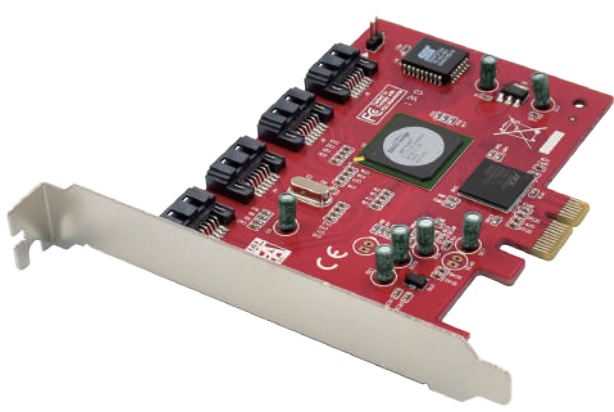

PCle x1 Sil3124 4-Port SATA 300 RAID Expansion Card

Chipset: SiLiconImage Sil3124 Interface: 4 x SATA Gen2 Port
Transfer rate: Communication speeds of 3Gbps, 1.5Gbps
Dimension: x mm (PCle Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x SATA cable (optional), 1 x Neutral box


PW511



PCle x1 Sil3132 2e2T SATA 3Gbps RAID Expansion Card

Chipset: SiLiconImage Sil3132 Interface: 2 x eSATA & 2 x SATA II
Transfer rate: Communication speeds of 3Gbps, 1.5Gbps
Dimension: 67 x 68 mm (PCle Board) Product weight: 42.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x SATA cable (optional), 1 x Neutral box


PW51

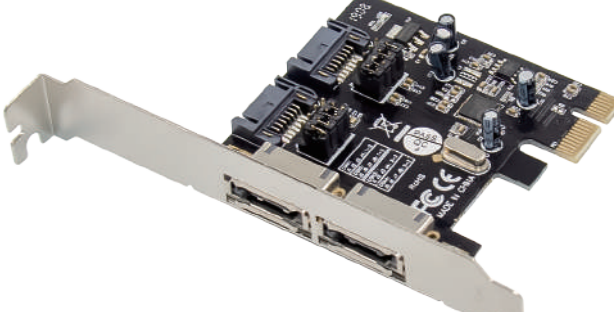

PCle x1 ASM1061 2e2T SATA III 6Gbps Expansion Card

Chipset: ASMedia ASM1061 Interface: 2xeSATA & 2xSATA3.0
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps
Dimension: 67 x 68 mm (PCle Board) Product weight: 40.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x SATA cable (optional), 1 x Neutral box

PW513

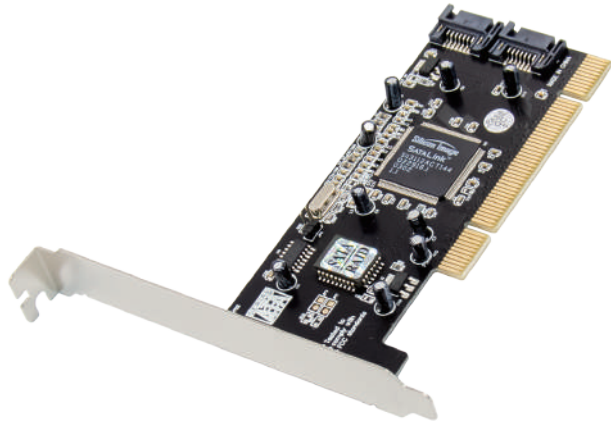


PCI Sil3112 2-Port SATA I 1.5Gbps RAID Expansion Card

Chipset: SiLiconImage Sil3112 Interface: 2 x SATA Gen1 Port
Transfer rate: Communication speeds of 1.5Gbps

Dimension: 120 x 50 mm (PCI Board) Product weight: 37.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x SATA cable (optional), 1 x Neutral box

PW514

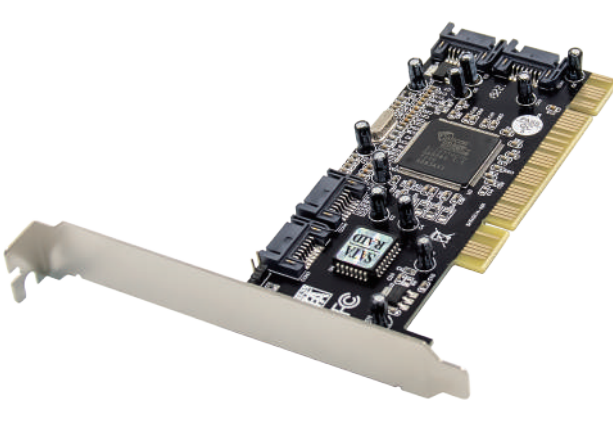

PCI Sil3114 4-Port SATA I 1.5Gbps RAID Expansion Card

Chipset: SiLiconImage Sil3114 Interface: 4 x SATA Gen1 Port
Transfer rate: Communication speeds of 1.5Gbps

Dimension: 120 x 50 mm (PCI Board) Product weight: 45.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x SATA cable (optional), 1 x Neutral box

PW512




PCI Sil3124 4-Port SATA II 3Gbps RAID Expansion Card

Chipset: SiLiconImage Sil3124 Interface: 4 x SATA Gen2 Port
Transfer rate: Communication speeds of 3Gbps, 1.5Gbps

Dimension: 122 x 60 mm (PCI Board) Product weight: 43.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x SATA cable (optional), 1 x Neutral box

PW515

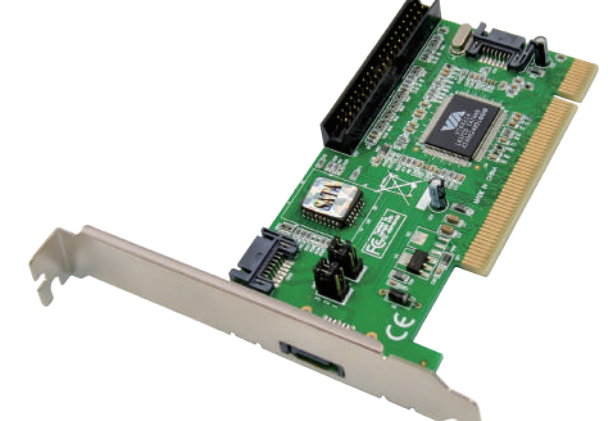

PCI VT6421A 3-SATA 150 + PATA RAID Expansion Card

Chipset: VIA VT6421A Interface: 3 x SATA Gen1 Port
Transfer rate: Communication speeds of 1.5Gbps

Dimension: 120 x 58 mm (PCI Board) Product weight: 49.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x SATA cable (optional), 1 x Neutral box

PW532




M.2 M Key JMB585 5-Port SATA 6Gbps Expansion Card

Chipset: JMicon JMB585 Interface: 5 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 22 x 80 mm (M.2 Board) Product weight: 8.3 g
Accessories: 1 x Screws, 2 x SATA cable (optional), 1 x Neutral box
1 x Screw driver, 1 x Anti-static bag

PW591

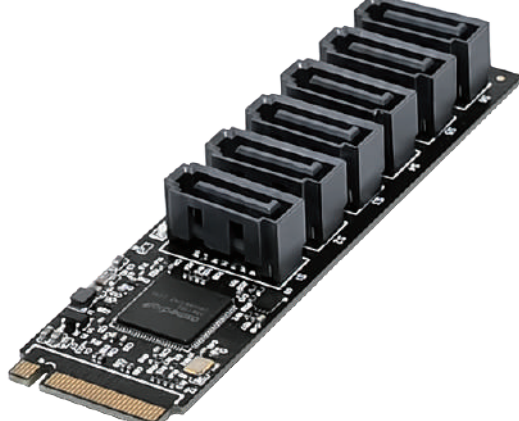

M.2 M Key ASM1166 6-Port SATA 6Gbps Expansion Card

Chipset: ASMedia ASM1166 Interface: 6 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 22 x 80 mm (M.2 Board) Product weight: 10.3 g
Accessories: 1 x Screws, 2 x SATA cable (optional), 1 x Neutral box
1 x Screw driver, 1 x Anti-static bag

PW577




MiniPCIE 88SE9215 SAS TO 4-SATA III Expansion Card

Chipset: Marvell 88SE9215 Interface: 4 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 53.3 g
Accessories: 1 x CD-Driver, 1 x SAS 36pin to 4-Port SATA cable: 50cm
1 x Anti-static bag, 1 x Screw driver, 1 x Screws, 1 x Neutral box

PW5105

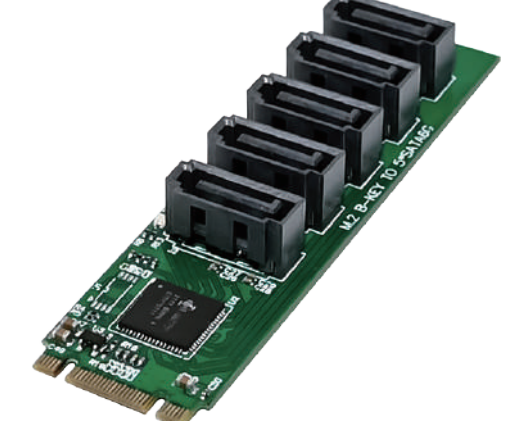

M.2 B+M JMB575 5-Port SATA 6Gbps Expansion Card

Chipset: JMicon JMB585 Interface: 5 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps

Dimension: 22 x 80 mm (M.2 Board) Product weight: 8.3 g
Accessories: 1 x Screws, 2 x SATA cable (optional), 1 x Neutral box
1 x Screw driver, 1 x Anti-static bag

PW578



M.2 B+M Key 88SE9230 4-Port SATA 6Gbps RAID Card

Chipset: Marvell 88SE9230 Interface: 4 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps
Dimension: 22 x 42 mm (M.2 Board) Product weight: 7.3 g
Accessories: 1 x Screws, 2 x SATA cable (optional), 1 x Neutral box
1 x Screw driver, 1 x Anti-static bag

PW579



M.2 B+M 88SE9215 4-Port SATA 6Gbps Expansion Card

Chipset: Marvell 88SE9215 Interface: 4 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps
Dimension: 22 x 42 mm (M.2 Board) Product weight: 7.3 g
Accessories: 1 x Screws, 2 x SATA cable (optional), 1 x Neutral box
1 x Screw driver, 1 x Anti-static bag

PW549



MiniPCIE 88SE9215 4-Port SATA 6Gbps Expansion Card

Chipset: Marvell 88SE9215 Interface: 4 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 8.3 g
Accessories: 1 x Screws, 2 x SATA cable (optional), 1 x Neutral box
1 x Screw driver, 1 x Anti-static bag

PW586



MiniPCIE 88SE9230 4-SATA Gen3 RAID Expansion Card

Chipset: Marvell 88SE9230 Interface: 4 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 8.3 g
Accessories: 1 x Screws, 2 x SATA cable (optional), 1 x Neutral box
1 x Screw driver, 1 x Anti-static bag

PW557



M.2 B+M JMB585 1xSAS TO 4-SATA III Expansion Card

Chipset: JMicon JMB585 Interface: 4 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps
Dimension: 22 x 42 mm (M.2 Board) Product weight: 51.8 g
Accessories: 1 x Screws, 1 x SAS 36pin to 4-Port SATA cable: 100cm
1 x Anti-static bag, 1 x Screw driver, 1 x Neutral box

PW559



M.2 B+M JMB585 2xSAS TO 8-SATA III Expansion Card

Chipset: JMB585 + JMB575 Interface: 8 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 103 g
Accessories: 1 x Screws, 80 x SAS 36pin to 4-Port SATA cable: 100cm
1 x Anti-static bag, 1 x Screw driver, 1 x Neutral box

PW581



M.2 A+E JMB582 2-Port SATA 6Gbps Expansion Card

Chipset: JMicon JMB582 Interface: 2 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps
Dimension: 22 x 30 mm (M.2 Board) Product weight: 7.5 g
Accessories: 1 x Screws, 1 x SATA cable (optional), 1 x Neutral box
1 x Screw driver, 1 x Anti-static bag

PW582



MiniPCIE JMB582 2-Port SATA 6Gbps Expansion Card

Chipset: JMicon JMB582 Interface: 2 x SATA Gen3 port
Transfer rate: Communication speeds of 6Gbps, 3Gbps, 1.5Gbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 6.3 g
Accessories: 1 x Screws, 1 x SATA cable (optional), 1 x Neutral box
1 x Screw driver, 1 x Anti-static bag

PW355



PCle x1 XR17V358 16-Port RS-232 Multi-Serial I/O Card

Chipset: XR17V358* 2 Interface: 16 x RS-232 Port
Data Rate: Up to 31.25Mbps Serial data rate

Dimension: x mm (PCle Board) Product weight: g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box
1 x DB-62pin to 16-Port DB-9pin Serial cable

PW358



PCle x1 XR17V358 16-Port RS-232 Multi-Serial I/O Card

Chipset: XR17V358* 2 Interface: 16 x RS-232 Port
Data Rate: Up to 31.25Mbps Serial data rate

Dimension: x mm (PCle Board) Product weight: g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box
1 x DB-62pin to 16-Port DB-9pin Serial cable

PW338



PCle x1 XR17V358 8-Port RS-232 Multi-Serial I/O Card

Chipset: XR17V358 Interface: 8 x RS-232 Port
Data Rate: Up to 31.25Mbps Serial data rate

Dimension: 80 x 68 mm (PCle Board) Product weight: 338 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x DB-62pin to 8-Port DB-9pin Serial cable, 1 x Neutral box

PW339



PCle x1 XR17V358 8-Port RS-232 Multi-Serial I/O Card

Chipset: XR17V358 Interface: 8 x RS-232 Port
Data Rate: Up to 31.25Mbps Serial data rate

Dimension: 122 x 96 mm (PCle Board) Product weight: 468.7 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box
1 x DB-62pin to 8-Port DB-9pin Serial cable

PW351



PCle x1 XR17V352 2-Port RS-232 Multi-Serial I/O Card

Chipset: XR17V352 Interface: 2 x RS-232 Port
Data Rate: Up to 31.25Mbps Serial data rate

Dimension: 100 x 68 mm (PCle Board) Product weight: 53.5 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x DB-44pin to 2-Port DB-9pin Serial cable, 1 x Neutral box

PW352



PCle x1 XR17V354 4-Port RS-232 Multi-Serial I/O Card

Chipset: XR17V354 Interface: 4 x RS-232 Port
Data Rate: Up to 31.25Mbps Serial data rate

Dimension: 100 x 68 mm (PCle Board) Product weight: 365.8 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x DB-44pin to 4-Port DB-9pin Serial cable, 1 x Neutral box

PW314



PCle x1 SB16C1058 8-Port RS-232 Multi-Serial I/O Card

Chipset: SB16C1058PCI Interface: 8 x RS-232 Port
Data Rate: Transmission rate 300 bps ~ 921.6 kbps

Dimension: 93 x 78 mm (PCle Board) Product weight: 445.2 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box
1 x DB-62pin to 8-Port DB-9pin Serial cable

PW327




PCI SB16C1058 8S 8-Port RS-232 Multi-Serial I/O Card

Chipset: SB16C1058PCI Interface: 8 x RS-232 Port
Data Rate: Transmission rate 300 bps ~ 921.6 kbps

Dimension: 100 x 78 mm (PCI Board) Product weight: 464.2 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box
1 x DB-62pin to 8-Port DB-9pin Serial cable

PW331

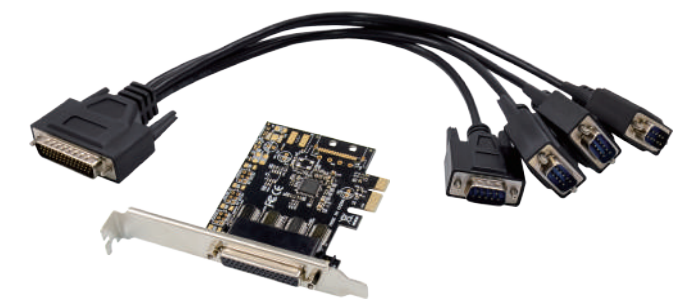


PCIe x1 AX99100 1 TO 4S RS-232 Multi-Serial I/O Card

Chipset: ASIX AX99100 Interface: 4 x RS-232 Port
Data Rate: Bi directional speeds up to 25 Mbps per port

Dimension: 85 x 69 mm (PCIe Board) Product weight: 254.2 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x DB-44pin to 4-Port DB-9pin Serial cable, 1 x Neutral box

PW318

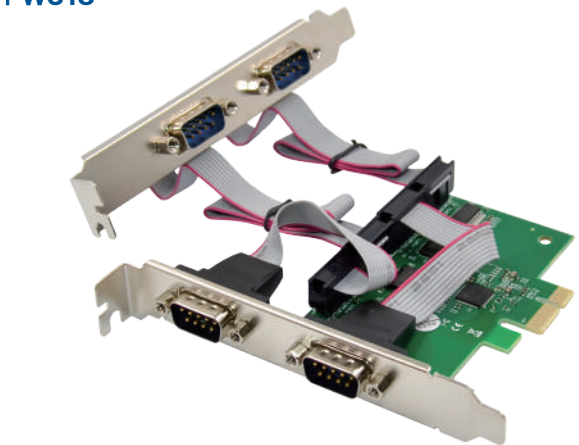

PCIe x1 AX99100 4S 4-Port RS-232 Multi-Serial I/O Card

Chipset: ASIX AX99100 Interface: 4 x RS-232 Port
Data Rate: Bi directional speeds up to 25 Mbps per port

Dimension: 97 x 60 mm (PCIe Board) Product weight: 87.2 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box

PW310



PCIe x1 WCH384 4S 4-Port DB9 RS-232 Multi-I/O Card

Chipset: WCH CH384 Interface: 4 x RS-232 Port
Baud Rate: Support 115200bps to 8Mbps (Programmable)

Dimension: 95 x 60 mm (PCIe Board) Product weight: 88.2 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box

PW348



PCIe x1 WCH384 4S RS-232&TTL Multi-Serial I/O Card

Chipset: WCH CH384 Interface: 4 x RS-232 port & TTL
Baud Rate: Support 115200 bps to 8 Mbps (Programmable)

Dimension: 94 x 63 mm (PCIe Board) Product weight: 53.7 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x DB-44pin to 4-Port DB-9pin Serial cable, 1 x Neutral box

PW350



PCIe x1 SB16C1052 4-Port RS-422/485 Multi-I/O Card

Chipset: SB16C1052PCI *2 Interface: 4 x RS-422/485 Port
Data Rate: Transmission rate 300 bps ~ 921.6 kbps

Dimension: 125 x 69 mm (PCIe Board) Product weight: 269.8 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x DB-44pin to 4-Port DB-9pin Serial cable, 1 x Neutral box

PW357



PCI SB16C1054 4S 4-Port RS-232 Multi-Serial I/O Card

Chipset: SB16C1054PCI Interface: 4 x RS-232 Port
Data Rate: Transmission rate 300 bps ~ 921.6 kbps

Dimension: 120 x 69 mm (PCI Board) Product weight: 55.6 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x DB-44pin to 4-Port DB-9pin Serial cable, 1 x Neutral box

PW31




PCIe X1 MCS9901 2S1P Serial & Parallel Multi-I/O Card

Chipset: ASIX MCS9901 Interface: 2 x Serial + 1 x Parallel
Transmission rate: Serial up to 230.4 Kbps, Parallel up to 1.5 Mbps

Dimension: 85 x 60 mm (PCIe Board) Product weight: 82.4 g
Accessories: 3 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box

PW36

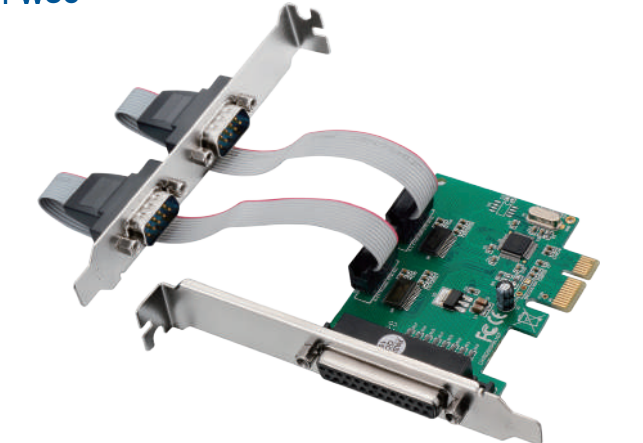

PCIe X1 WCH382 2S1P Serial & Parallel Multi-I/O Card

Chipset: WCH CH382 Interface: 2 x Serial + 1 x Parallel
Transmission rate: Serial up to 115 Kbps, Parallel up to 1 Mbps

Dimension: 85 x 60 mm (PCIe Board) Product weight: 79.6 g
Accessories: 3 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box

PW317



PCIe X1 AX99100 2S1P Serial & Parallel Multi-I/O Card

Chipset: ASIX AX99100 Interface: 2 x Serial + 1 x Parallel
Transmission rate: Serial up to 921.6 Kbps, Parallel up to 1.5 Mbps
Dimension: 85 x 60 mm (PCIe Board) Product weight: 76.3 g
Accessories: 3 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box


PW311



PCIe X1 WCH384 4S1P Serial & Parallel Multi-I/O Card

Chipset: WCH CH384 Interface: 4 x Serial + 1 x Parallel
Transmission rate: Serial up to 115 Kbps, Parallel up to 1 Mbps
Dimension: 93 x 60 mm (PCIe Board) Product weight: 125.3 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box


PW39

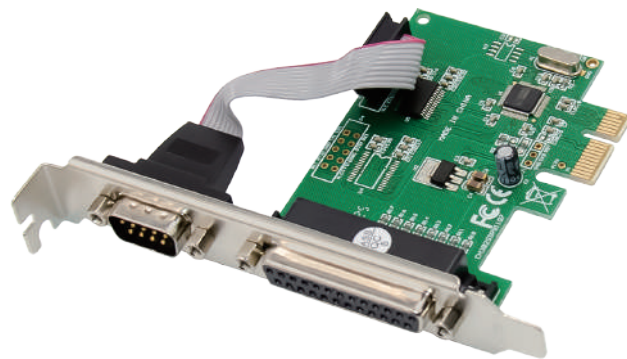

PCIe X1 WCH382 1S1P Serial & Parallel Multi-I/O Card

Chipset: WCH CH382 Interface: 1 x Serial + 1 x Parallel
Transmission rate: Serial up to 115 Kbps, Parallel up to 1 Mbps
Dimension: 85 x 60 mm (PCIe Board) Product weight: 52 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box


PW329

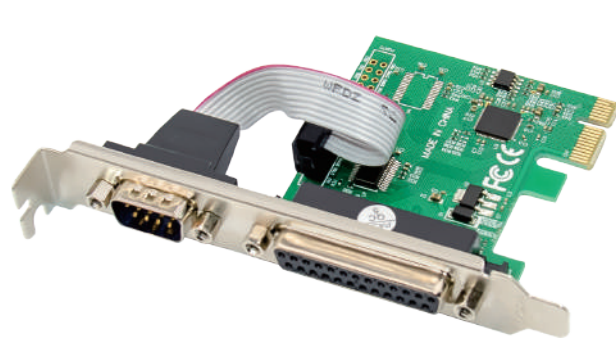

PCIe X1 AX99100 1S1P Serial & Parallel Multi-I/O Card

Chipset: ASIX AX99100 Interface: 2 x Serial + 1 x Parallel
Transmission rate: Serial up to 921.6 Kbps, Parallel up to 1.5 Mbps
Dimension: 85 x 60 mm (PCIe Board) Product weight: 34.6 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box


PW316

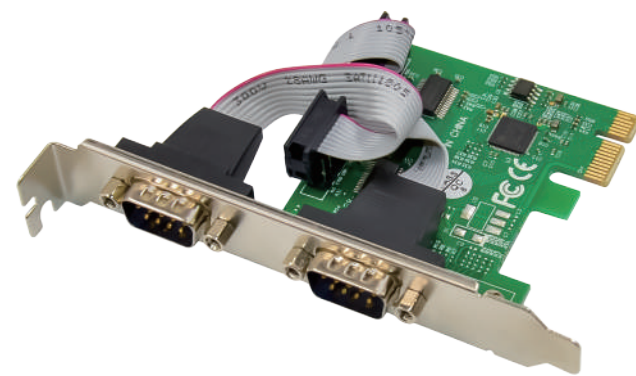

PCIe X1 AX99100 2-Port RS-232 Multi-Serial I/O Card

Chipset: ASIX AX99100 Interface: 2 x RS-232 Port
Data Rate: Transmission speed up to 115200bps
Dimension: 72 x 65 mm (PCIe Board) Product weight: 47.2 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box


PW340

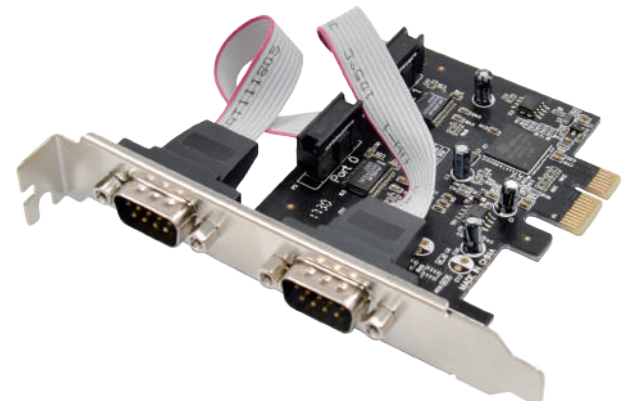

PCIe x1 OXPCle952 2-Port RS-232 Multi-Serial I/O Card

Chipset: OXPCle952 Interface: 2 x RS-232 Port
Data Rate: Fast data rates up to 1.5 Mbytes/sec
Dimension: 85 x 60 mm (PCIe Board) Product weight: g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box

PW34

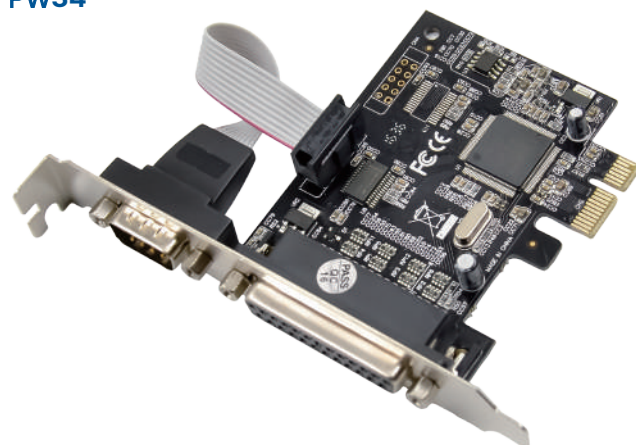

PCIe X1 MCS9901 1S1P Serial & Parallel Multi-I/O Card

Chipset: ASIX MCS9901 Interface: 1 x Serial + 1 x Parallel
Transmission rate: Serial up to 230.4 Kbps, Parallel up to 1.5 Mbps
Dimension: 85 x 60 mm (PCIe Board) Product weight: 67.2 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box


PW35



PCIe x1 MCS9904 4-Port RS-232 Multi-Serial I/O Card

Chipset: ASIX MCS9904 Interface: 4 x RS-232 Port
Data Rate: Transfer rates up to 115 Kbps on each port
Dimension: x mm (PCIe Board) Product weight: g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box


PW32

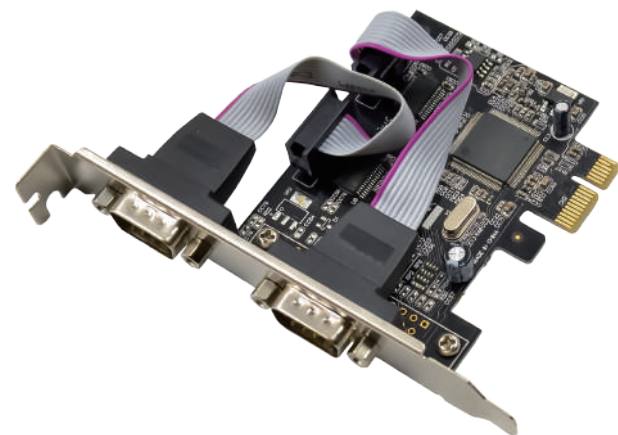

PCIe X1 MCS9901 2-Port RS-232 Multi-Serial I/O Card

Chipset: ASIX MCS9901 Interface: 2 x RS-232 Port
Data Rate: Transfer rates up to 250 Kbps
Dimension: 67 x 60 mm (PCIe Board) Product weight: 51.8 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box


PW33

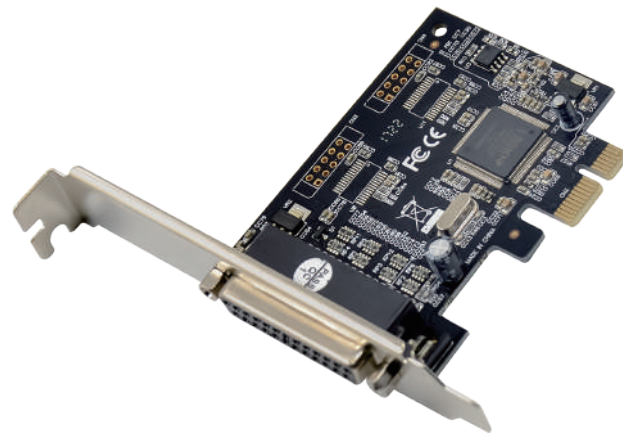

PCIe X1 MCS9901 1P Single-Port DB25 LTP Parallel Card

Chipset: ASIX MCS9901 Interface: 1 x DB25 Parallel Port
Data Rate: Transfer rates up to 1.5 Mbps
Dimension: 85 x 60 mm (PCIe Board) Product weight: 44.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box

PW37

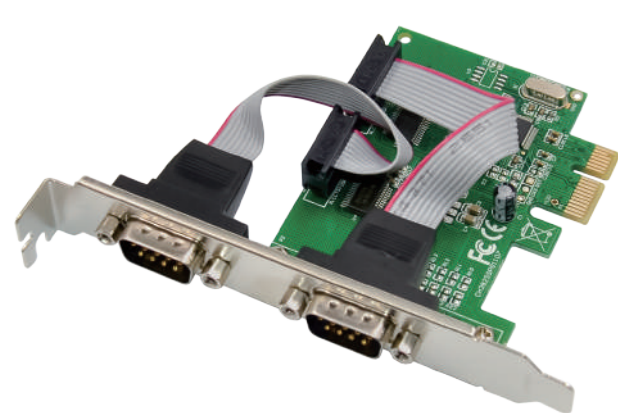

PCIe X1 CH382 2S 2-Port RS-232 Multi-Serial I/O Card

Chipset: WCH CH382 Interface: 2 x RS-232 Port
Data Rate: Transmission speed up to 115 Kbps
Dimension: 85 x 60 mm (PCIe Board) Product weight: 50.6 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box

PW38



PCIe X1 CH382 1P Single-Port DB25 LTP1 Parallel Card

Chipset: WCH CH382 Interface: 1 x DB25 Parallel Port
Data Rate: Transmission speed up to 1 Mbps
Dimension: 85 x 60 mm (PCIe Board) Product weight: 41.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box


PW349



PCIe X1 SB16C1052 2-Port RS-232 Multi-Serial I/O Card

Chipset: SB16C1052PCI Interface: 2 x RS-232 Port
Data Rate: Transmission rate 300 bps ~ 921.6 kbps
Dimension: 95 x 69 mm (PCIe Board) Product weight: 55 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box

PW320

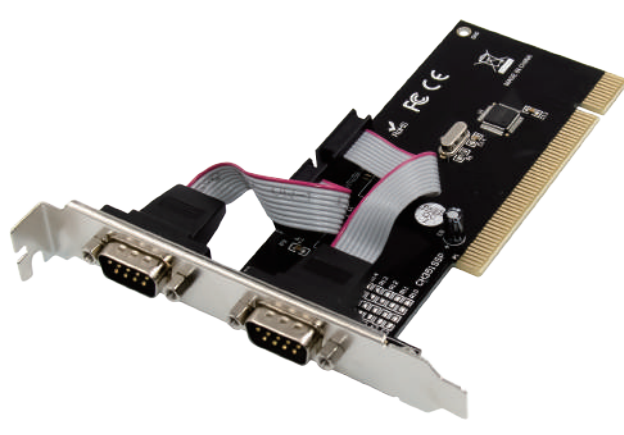

PCI CH351 2S 2-Port DB9 RS-232 Multi-Serial I/O Card

Chipset: WCH CH351 Interface: 2 x RS-232 Port
Baud rate: Transfer rates up to 115200 bps ~ 4 Mbps
Dimension: 126 x 57 mm (PCI Board) Product weight: 55.2 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box


PW328



PCIe X1 AX99100 Single-Port DB9 RS-232 Serial Card

Chipset: ASIX AX99100 Interface: 1 x RS-232 Port
Data Rate: Transmission speed up to 115200bps
Dimension: 67 x 60 mm (PCIe Board) Product weight: 37.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box


PW315

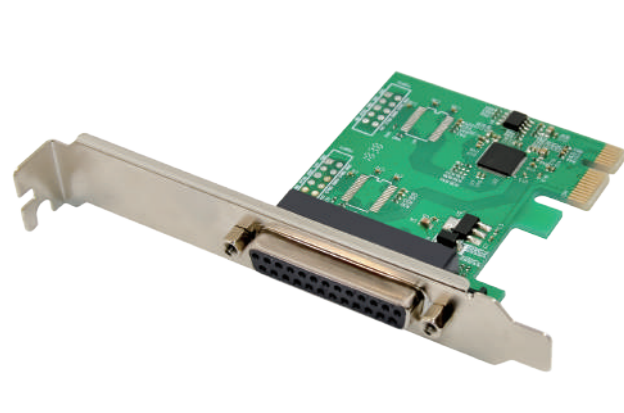

PCIe X1 AX99100 1P Single-Port DB25 LTP Parallel Card

Chipset: ASIX AX99100 Interface: 1 x DB25 Parallel Port
Data Rate: Transmission speed up to 1.5 Mbps
Dimension: 72 x 65 mm (PCIe Board) Product weight: 40 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box


PW335

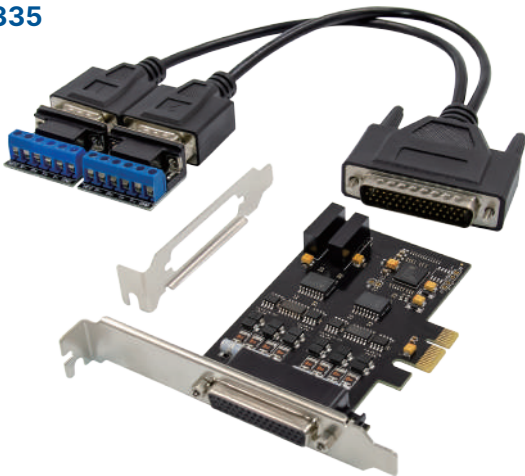

PCIe X1 XR17V352 2-Port RS-422/485 Multi-I/O Card

Chipset: XR17V352 Interface: 2 x RS-422/485 Port
Data Rate: Max 31.25 Mbps 600W Surge, ±15KV ESD protection
Dimension: 98 x 69 mm (PCIe Board) Product weight: 59.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x DB44 to 2-Port DB-9 Serial Cable, 2 x DB9 to 6-pin Connector

PW336

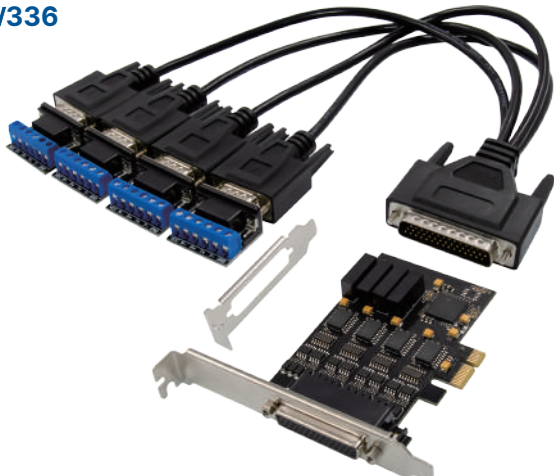

PCIe X1 XR17V354 4-Port RS-422/485 Multi-I/O Card

Chipset: XR17V354 Interface: 4 x RS-422/485 Port
Data Rate: Max 31.25 Mbps 600W Surge, ±15KV ESD protection
Dimension: 98 x 69 mm (PCIe Board) Product weight: 63.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x DB44 to 4-Port DB-9 Serial Cable, 4 x DB9 to 6-pin Connector


PW345



PCIe X1 XR17V358 8-Port RS-422/485 Multi-I/O Card

Chipset: XR17V358 Interface: 8 x RS-422/485 Port
Data Rate: Max 31.25 Mbps 600W Surge, ±15KV ESD protection
Dimension: 89 x 65 mm (PCIe Board) Product weight: 484.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x DB64 to 8-Port DB-9 Serial Cable, 8 x DB9 to 6-pin Connector


PW330

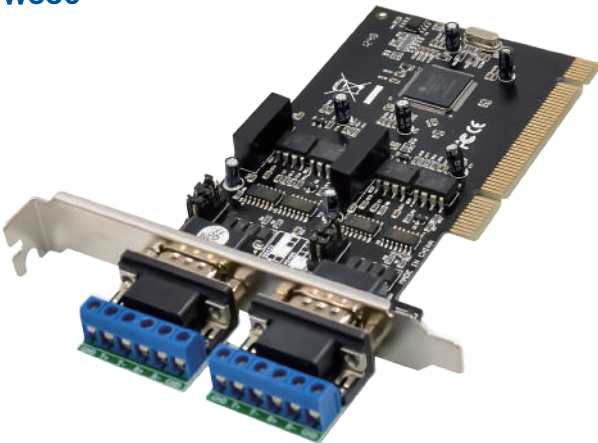

PCI MCS9865 2S 2-Port RS-422/485 Multi-I/O Card

Chipset: ASIX MCS9865 Interface: 2 x RS-422/485 Port
Data Rate: 9600bps-38400bps, 600W Surge, ±15KV ESD protection
Dimension: 120 x 70 mm (PCI Board) Product weight: 91.2 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box
2 x DB9 to 6-pin Connector


PW359

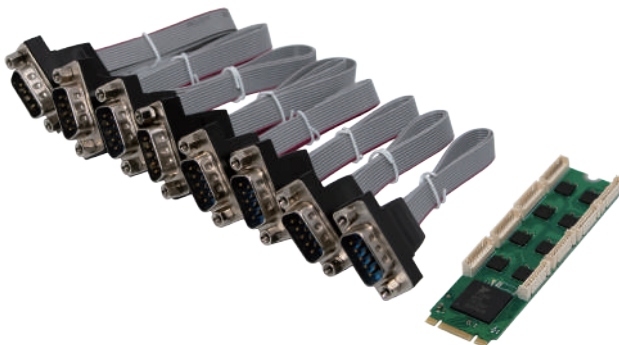

M.2 B+M XR17V358 8-Port RS-232 Multi-Serial I/O Card

Chipset: XR17V358 Interface: 8 x RS-232 Port
Data Rate: Up to 31.25Mbps Serial data rate
Dimension: 22 x 80 mm (M.2 Board) Product weight: 95.5 g
Accessories: 8 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
4 x Full height bracket, 8 x DB9 RS-232 Serial cable, 1 x Neutral box

PW366

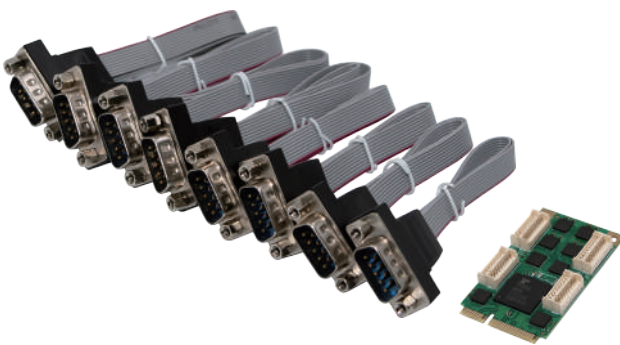

MiniPCIE XR17V358 8-Port RS-232 Multi-Serial I/O Card

Chipset: XR17V358 Interface: 8 x RS-232 Port
Data Rate: Up to 31.25Mbps Serial data rate
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 95.5 g
Accessories: 8 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
4 x Full height bracket, 8 x DB9 RS-232 Serial cable, 1 x Neutral box

PW332



M.2 B+M AX99100 2-Port RS-232 Multi-Serial I/O Card

Chipset: ASIX AX99100 Interface: 2 x RS-232 Port
Data Rate: Transmission speed up to 115200bps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 6.5 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Full height bracket, 2 x DB9 RS-232 Serial cable, 1 x Neutral box


PW334



M.2 B+M AX99100 4-Port RS-232 Multi-Serial I/O Card

Chipset: ASIX AX99100 Interface: 4 x RS-232 Port
Data Rate: Transmission speed up to 115200bps
Dimension: 22 x 80 mm (M.2 Board) Product weight: 6.5 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x Full height bracket, 4 x DB9 RS-232 Serial cable, 1 x Neutral box


PW344

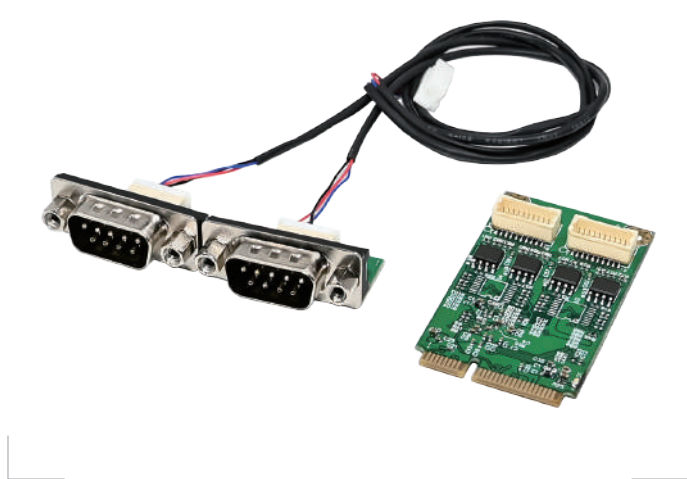

MiniPCIE AX99100 2-Port RS-232 Multi-Serial I/O Card

Chipset: ASIX AX99100 Interface: 2 x RS-232 Port
Data Rate: Transmission speed up to 115200bps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 5.1 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Full height bracket, 4 x DB9 RS-232 Serial cable, 1 x Neutral box

PW346

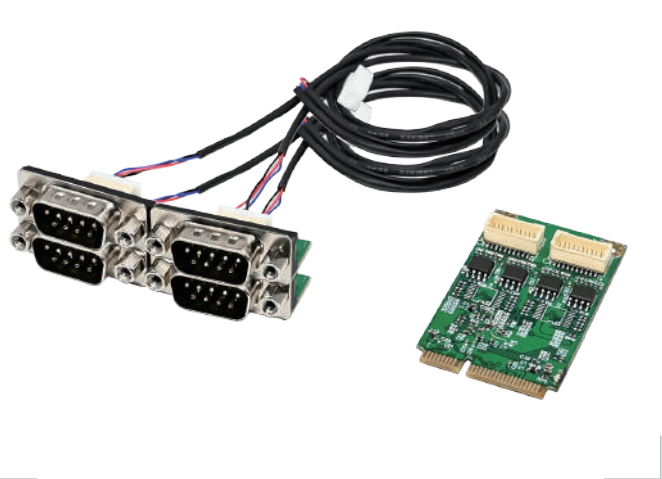

MiniPCIE AX99100 4-Port RS-232 Multi-Serial I/O Card

Chipset: ASIX AX99100 Interface: 4 x RS-232 Port
Data Rate: Transmission speed up to 115200bps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 5.1 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x Full height bracket, 4 x DB9 RS-232 Serial cable, 1 x Neutral box


PW341



MiniPCIE CH384 1P Single-Port DB25 LTP Parallel Card

Chipset: WCH CH384 Interface: 1 x DB25 Parallel Port
Data Rate: Transmission speed up to 1 Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 8.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Full height bracket, 1 x DB25 Parallel cable, 1 x Neutral box

PW354

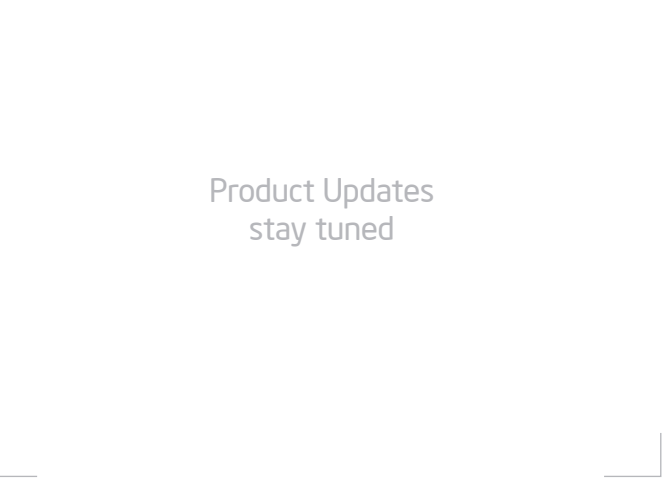

M.2 B+M CH384 4S 4-Port RS-232 Multi-Serial I/O Card

Chipset: WCH CH384 Interface: 4 x RS-232 Port
Baud Rate: Support 115200bps to 8Mbps (Programmable)
Dimension: 22 x 80 mm (M.2 Board) Product weight: 7.2 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x Full height bracket, 4 x DB9 RS-232 Serial cable, 1 x Neutral box

PW342



MiniPCIE CH384 4S 4-Port RS-232 Multi-Serial I/O Card

Chipset: WCH CH384 Interface: 4 x RS-232 Port
Baud Rate: Support 115200bps to 8Mbps (Programmable)
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 48 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x Full height bracket, 4 x DB9 RS-232 Serial cable, 1 x Neutral box


PW343



MiniPCIE CH384 4S1P Serial & Parallel Multi-I/O Card

Chipset: WCH CH384 Interface: 4 x Serial + 1 x Parallel
Transmission rate: Serial up to 115 Kbps, Parallel up to 1 Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 48 g
Accessories: 5 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
3 x Full height bracket, 4 x DB9 RS-232 Serial cable, 1 x Neutral box


PW321

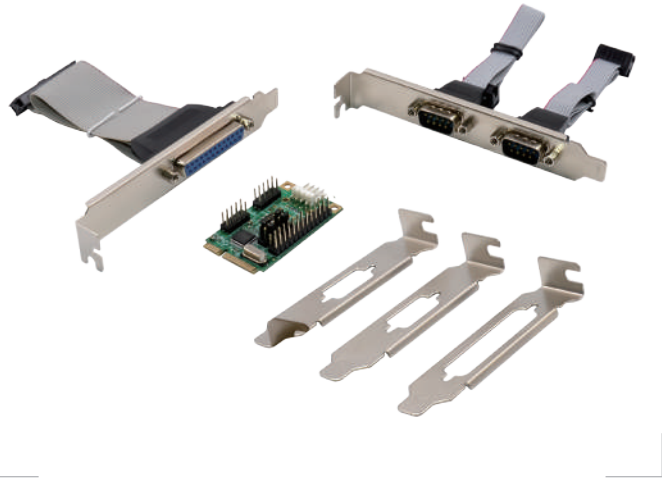

MiniPCIE CH382 2S1P Serial & Parallel Multi-I/O Card

Chipset: WCH CH382 Interface: 2 x Serial + 1 x Parallel
Transmission rate: Serial up to 115 Kbps, Parallel up to 1 Mbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 7.9 g
Accessories: 3 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x Full height bracket, 2 x DB9 RS-232 Serial cable, 1 x Neutral box


PW322

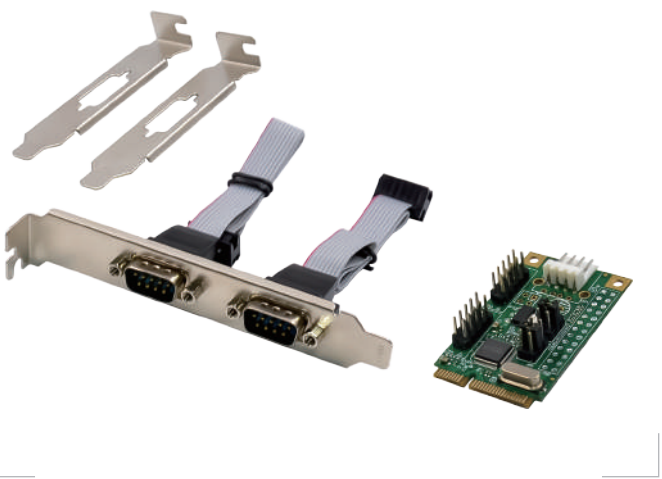

PCIe x1 MCS9904 4-Port RS-232 Multi-Serial I/O Card

Chipset: WCH CH382 Interface: 2 x RS-232 Port
Data Rate: Transmission speed up to 115 Kbps
Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 7.9 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Full height bracket, 2 x DB9 RS-232 Serial cable, 1 x Neutral box

PW361

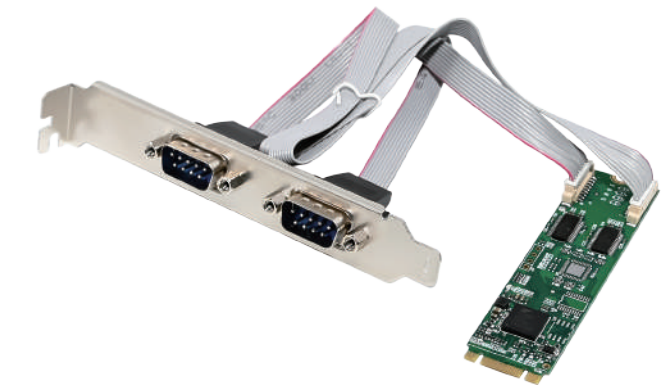


M.2 B+M XR17V352 2-Port RS-232 Multi-Serial I/O Card

Chipset: XR17V352 Interface: 2 x RS-232 Port
Data Rate: Up to 31.25Mbps Serial data rate

Dimension: 22 x 80 mm (M.2 Board) Product weight: 39 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Full height bracket, 2 x DB9 RS-232 Serial cable, 1 x Neutral box

PW369

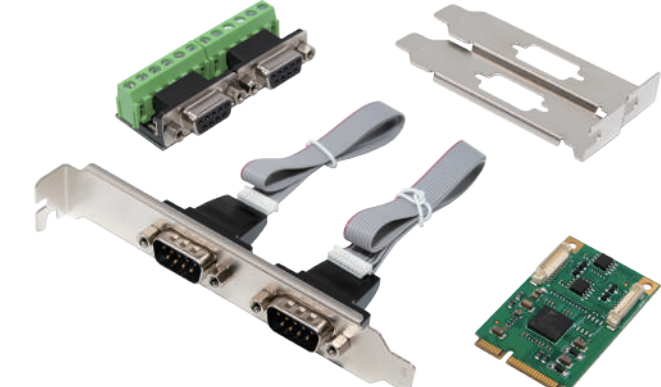

PCIe X1 WCH382 1S1P Serial & Parallel Multi-I/O Card

Chipset: WCH CH382 Interface: 1 x Serial + 1 x Parallel
Transmission rate: Serial up to 115 Kbps, Parallel up to 1 Mbps

Dimension: 85 x 60 mm (PCIe Board) Product weight: 52 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box

PW363




MiniPCIE MCS9901 2S1P Serial & Parallel Multi-I/O Card

Chipset: ASIX MCS9901 Interface: 2 x Serial + 1 x Parallel
Transmission rate: Serial up to 230.4 Kbps, Parallel up to 1.5 Mbps

Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 8.3 g
Accessories: 3 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
2 x Full height bracket, 2 x DB9 RS-232 Serial cable, 1 x Neutral box

PW360

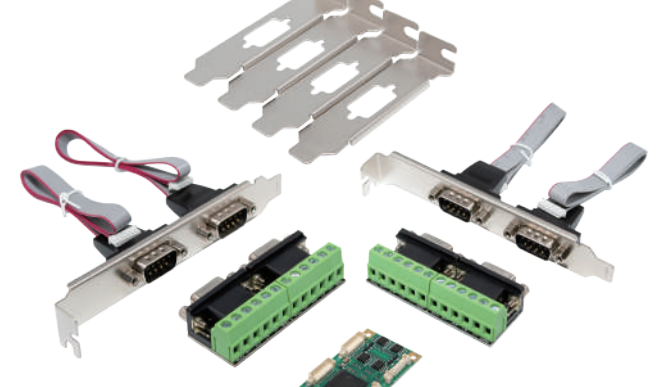

PCIe X1 AX99100 1S1P Serial & Parallel Multi-I/O Card

Chipset: ASIX AX99100 Interface: 2 x Serial + 1 x Parallel
Transmission rate: Serial up to 921.6 Kbps, Parallel up to 1.5 Mbps

Dimension: 85 x 60 mm (PCIe Board) Product weight: 34.6 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box

PW347




MiniPCIE CH382 1P Single-Port DB25 LTP Parallel Card

Chipset: WCH CH382 Interface: 1 x DB25 Parallel Port
Data Rate: Transmission speed up to 1 Mbps

Dimension: 30 x 51 mm (MiniPCIE Board) Product weight: 45.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Full height bracket, 1 x DB25 Parallel cable, 1 x Neutral box

PW368

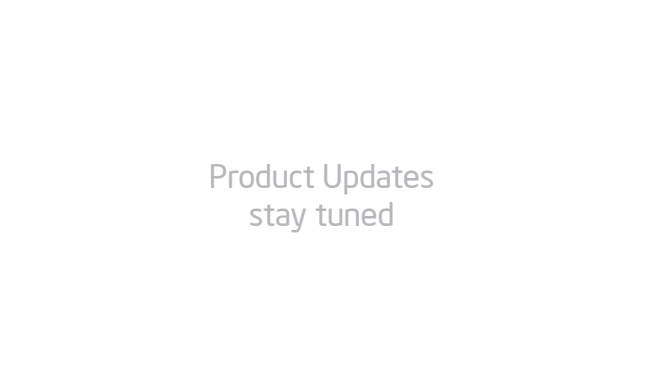

USB2.0 to TUSB3410 RS-485 Serial Converter Adapter

Chipset: TI TUSB3410 Interface: 1 x RS-422/485 Port
Baud rate: 50 bps~921.6 Kbps 600W surge, ±15KV ESD protection

Dimension: L60 x W38 x H20 mm Product weight: 50.3 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW353



USB2.0 to FT232RL RS-422/RS-485 Converter Adapter

Chipset: FTDI FT232RL Interface: 1 x RS-422/485 Port
Baud rate: 300 bps~3 Mbps 600W surge, ±15KV ESD protection

Dimension: x mm Product weight: g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW364



USB2.0 to TUSB3410 RS-232 Serial Converter Adapter

Chipset: TI TUSB3410 Interface: 1 x RS-232 Port
Baud rate: 50 bps~921.6 Kbps

Dimension: L60 x W38 x H20 mm Product weight: 50.3 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW419



HDMI Cable Length: 35cm

M.2 B+M SM768 4K HDMI High Definition Graphics Card

Chipset: Siliconmotion SM768 Output I/F: 1 x HDMI Port
Graphics Engine: 128-bit 2D Engine w/ Video Decoder
Resolution: 4K UHD - 3840x2160 @30p
Dimension: 22 x 80 mm(M.2 Board) Product weight: 44.8 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW421



HDMI Cable Length: 35cm

MiniPCIE SM768 4K HDMI High Definition Graphics Card

Chipset: Siliconmotion SM768 Output I/F: 1 x HDMI Port
Graphics Engine: 128-bit 2D Engine w/ Video Decoder
Resolution: 4K UHD - 3840x2160 @30p
Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 58.3 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW420



DVI-D Cable Length: 35cm

M.2 B+M SM768 2K DVI-D High Definition Graphics Card

Chipset: Siliconmotion SM768 Output I/F: 1 x DVI-D Port
Graphics Engine: 128-bit 2D Engine w/ Video Decoder
Resolution: 2K Full HD - 1920x1080 @60p
Dimension: 22 x 80 mm(M.2 Board) Product weight: 57.3 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW422



DVI-D Cable Length: 35cm

MiniPCIE SM768 2K DVI-D High Definition Graphics Card

Chipset: Siliconmotion SM768 Output I/F: 1 x DVI-D Port
Graphics Engine: 128-bit 2D Engine w/ Video Decoder
Resolution: 2K Full HD - 1920x1080 @60p
Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 58.4 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW418




HDMI Cable Length: 35cm

MiniPCIE SM750 1 x HDMI Embedded 2D Graphics Card

Chipset: Siliconmotion SM750 Form-Factor: MiniPCIE
Graphics Engine: 128-bit 2D Engine Output I/F: 1 x HDMI Port
Resolution: 1920x1200 (max)
Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 41.2 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW426

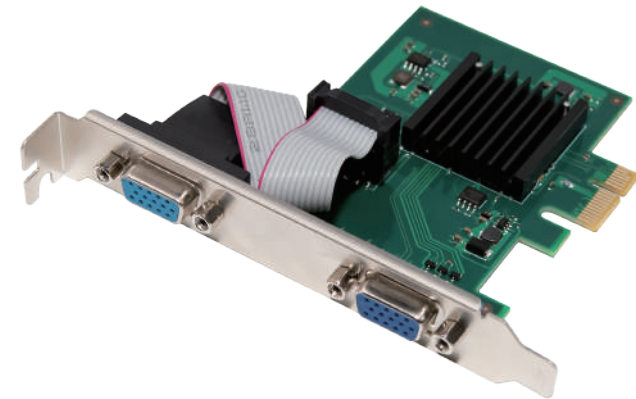

PCIe X1 SM750 Dual-VGA Embedded 2D Graphics Card

Chipset: Siliconmotion SM750 Output I/F: 2 x VGA Port
Graphics Engine: 128-bit 2D Engine Host Interface: PCIe x 1
Resolution: 1920x1440 (max)
Dimension: 87 x 69 mm(PCIe Board) Product weight: 59.3 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW416




HDMI Cable Length: 35cm

MiniPCIE SM750 2 x VGA Embedded 2D Graphics Card

Chipset: Siliconmotion SM750 Form-Factor: MiniPCIE
Graphics Engine: 128-bit 2D Engine Output I/F: 1 x VGA Port
Resolution: 1920x1440 (max)
Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 78.8 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box


PW427

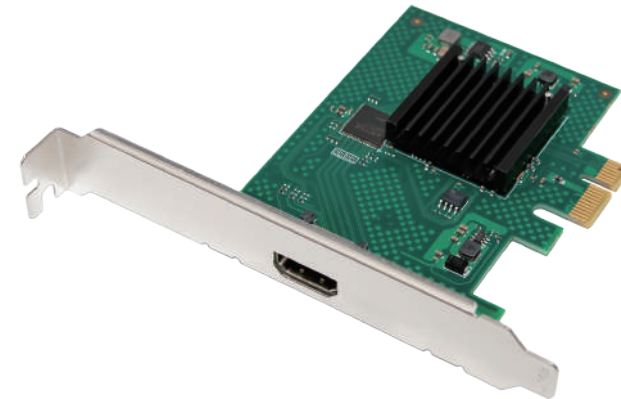

PCIe X1 SM750 1 x HDMI Embedded 2D Graphics Card

Chipset: Siliconmotion SM750 Output I/F: 1 x HDMI Port
Graphics Engine: 128-bit 2D Engine Host Interface: PCIe x 1
Resolution: 1920x1200 (max)
Dimension: 87 x 69 mm(PCIe Board) Product weight: 48.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW414

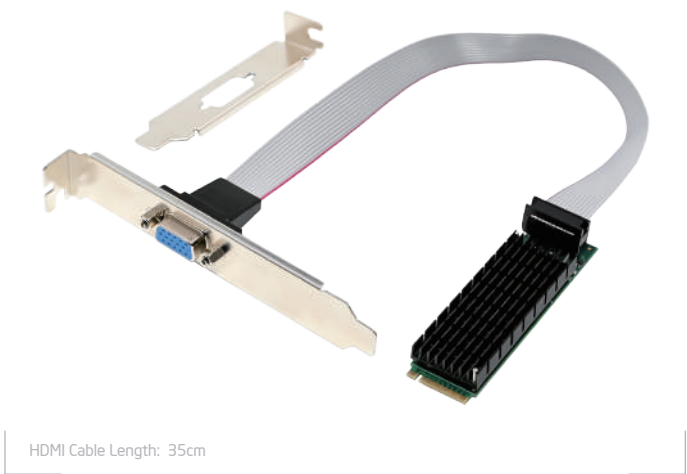

HDMI Cable Length: 35cm

M.2 M AST2400 1 x VGA Embedded 2D Graphics Card

Chipset: ASPEED AST2400	Form-Factor: M.2 M Key
Graphics Engine: 128-bit 2D Engine	Output I/F: 1 x VGA Port
Resolution: WUXGA- 1920x1200 32bpp@60Hz	
Dimension: 22 x 80 mm(M.2 Board)	Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box	


PW425



PCIe X1 AST2400 1 x VGA Embedded 2D Graphics Card

Chipset: ASPEED AST2400	Host Interface: PCIe x1
Graphics Engine: 128-bit 2D Engine	Output I/F: 1 x VGA Port
Resolution: WUXGA- 1920x1200 32bpp@60Hz	
Dimension: 87 x 69 mm(PCIe Board)	Product weight: 51.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box	

PW423

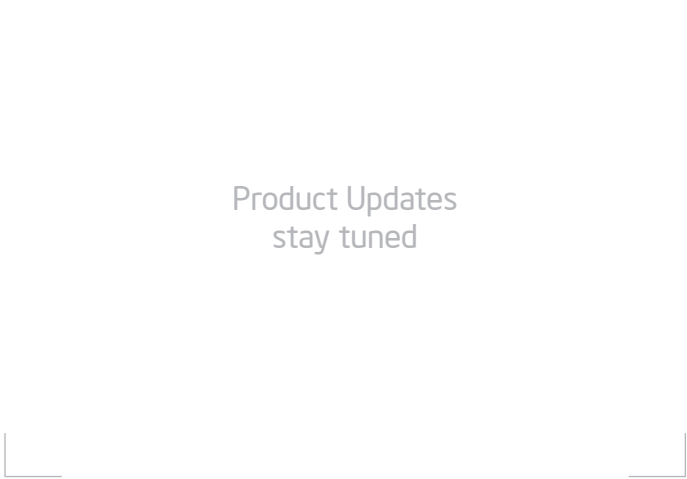


Product Updates
stay tuned

PCIe X1 SM750 1 x VGA Embedded 2D Graphics Card

Chipset: Siliconmotion SM750	Output I/F: 1 x VGA Port
Graphics Engine: 128-bit 2D Engine	Host Interface: PCIe x 1
Resolution: 1920x1440 (max)	
Dimension: 87 x 69 mm(PCIe Board)	Product weight: g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box	

PW4

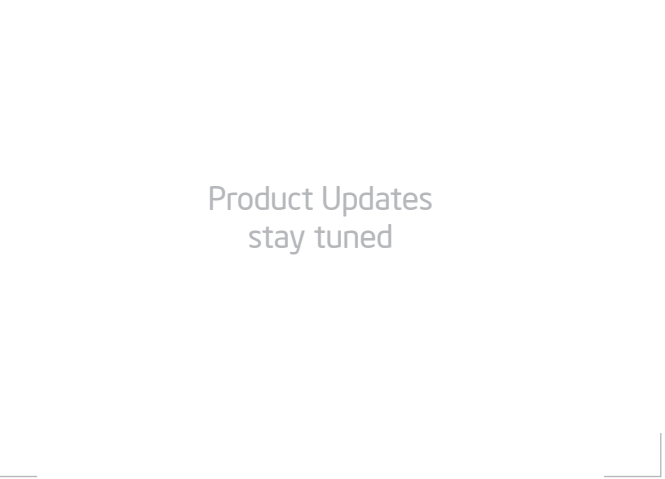


Product Updates
stay tuned

PCIe X1 SM768 4K HDMI High Definition Graphics Card

Chipset: Siliconmotion SM768	Output I/F: 1 x HDMI Port
Graphics Engine: 128-bit 2D Engine w/ Video Decoder	
Resolution: 4K UHD - 3840x2160 @30p	
Dimension: 87 x 69 mm(PCIe Board)	Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box	


PW42

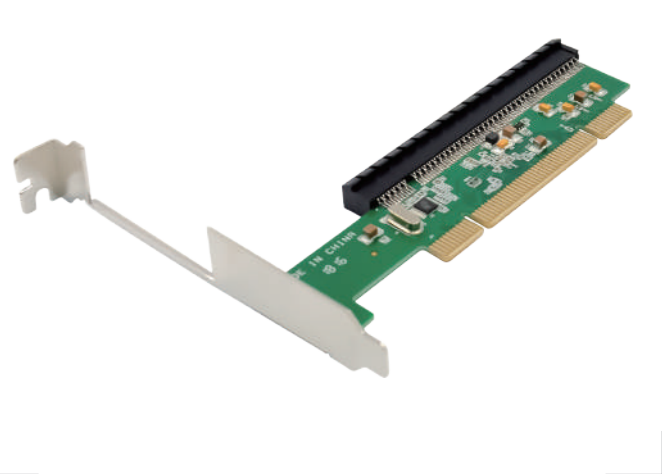

PCI to PCI Express PEX8112 Bridge Conversion Card

Chipset: PLX PEX8112	Host Interface: PCI 32bit/33MHz
Endpoint Interface: 1 x PCIe slot (x1, 2.5 Gbps per direction)	
Dimension: 130 x 39 mm(PCI Board)	Product weight: 36.8 g
Accessories: 1 x Anti-static bag, 1 x Neutral box	

PW43

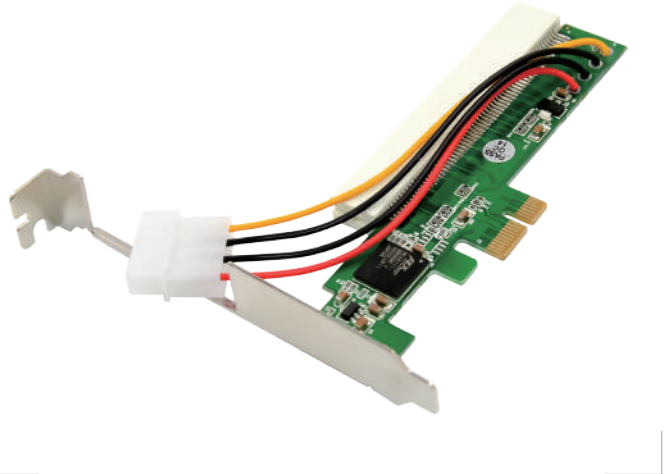

PCI Express X1 to PCI PEX8112 Bridge Conversion Card

Chipset: PLX PEX8112	Host Interface: PCIe x1
Endpoint Interface: 1 x PCI 32 bit/33MHz	
Dimension: 123 x 45 mm(PCI Board)	Product weight: 41.6 g
Accessories: 1 x Anti-static bag, 1 x Neutral box	


PW45



PCIe X1 to 1xPCI Slot ASM1083 Bridge Conversion Card

Chipset: ASMedia ASM1083	Host Interface: PCIe x1
Endpoint Interface: 1 x PCI 32 bit/33MHz	
Dimension: 60 x 58 mm(PCIe) / 132 x 38mm(PCI)	Weight: g
Accessories: 1 x SATA 15PIN Power cable: 5 cm, 1 x Anti-static bag	
1 x USB3.0 cable: 60cm, 1 x Neutral box	


PW46

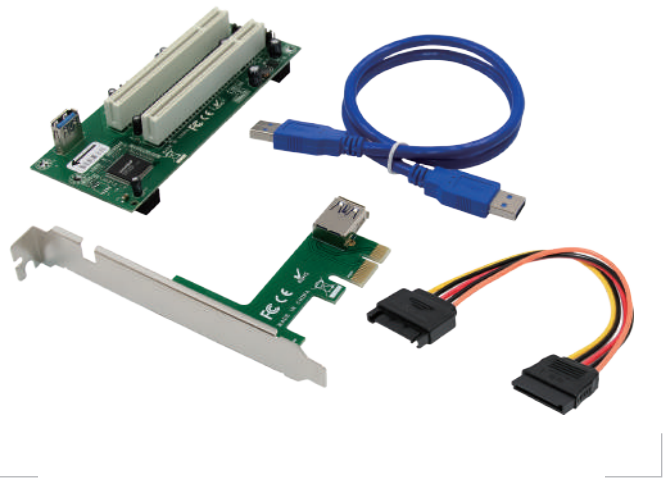

PCIe X1 to 2xPCI Slot ASM1083 Bridge Conversion Card

Chipset: ASMedia ASM1083	Host Interface: PCIe x1
Endpoint Interface: 2 x PCI 32 bit/33MHz	
Dimension: 60 x 58 mm(PCIe) / 132 x 56mm(PCI)	Weight: g
Accessories: 1 x SATA 15PIN Power cable: 5 cm, 1 x Anti-static bag	
1 x USB3.0 cable: 60cm, 1 x Neutral box	

PW47

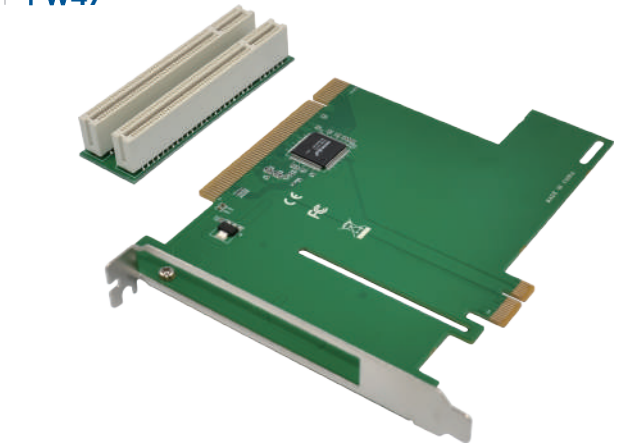


Self-powered


PCIe X1 to 1xPCI Slot ASM1083 Bridge Conversion Card

Chipset: ASMedia ASM1083 Host Interface: PCIe x1
Endpoint Interface: 1 x PCI 32 bit/33MHz (Inverted insertion)
Dimension: 143 x 115 mm(PCle) / 88 x 28mm(PCI) Weight: 93.5 g
Accessories: 1 x Anti-static bag, 1 x Neutral box

PW41

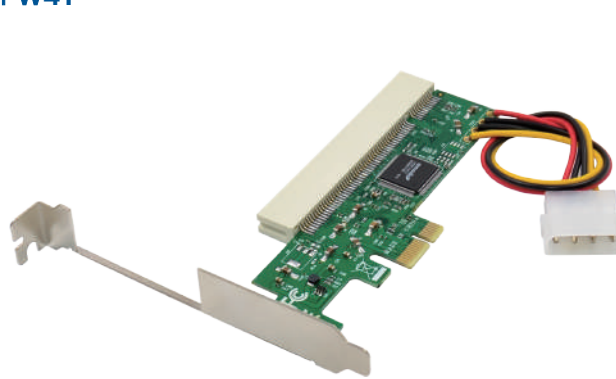


PW48

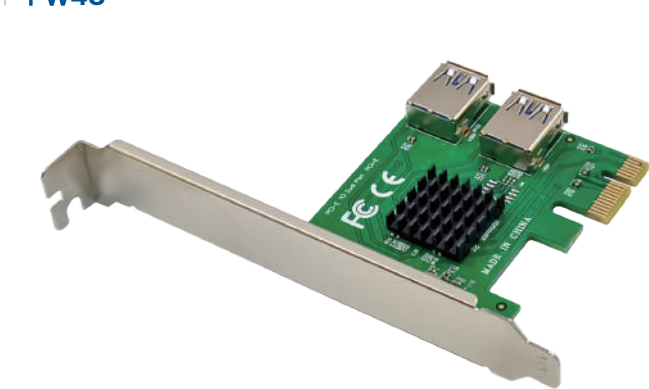

PCIe x1 2-Port USB3.0 to PCIe Slot ASM1182 Riser Card

Chipset: ASMedia ASM1182e Host Interface: PCIe 2.0 x1
Main function: Split a single PCIe x1 lane into two separate x1 lanes
Dimension: 65 x 55 mm(PCle Board) Product weight: 33.2 g
Accessories: 1 x Anti-static bag, 1 x Neutral box

PW49

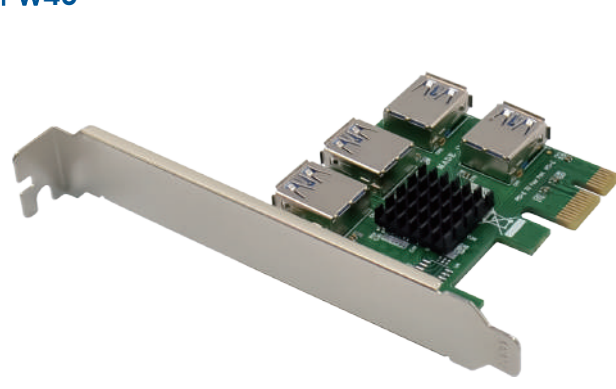

PCIe x1 4-Port USB3.0 to PCIe Slot ASM1184 Riser Card

Chipset: ASMedia ASM1184e Host Interface: PCIe 2.0 x1
Main function: Split a single PCIe x1 lane into four separate x1 lanes
Dimension: 65 x 55 mm(PCle Board) Product weight: 38.1 g
Accessories: 1 x Anti-static bag, 1 x Neutral box

PW411



PCIe x1 4-Port PCIe x1 Slot ASM1184 Bridge Riser Card

Chipset: ASMedia ASM1184e Host Interface: PCIe 2.0 x1
Main function: Split a single PCIe x1 lane into four separate x1 lanes
Dimension: 50 x 58 mm / 120 x 83mm(PCle Board) Weight: 92.3 g
Accessories: 1 x SATA 15PIN Power cable: 5cm, 1 x Anti-static bag
1 x USB3.0 cable: 60cm, 1 x Neutral box


PW412



PCIe x1 6-Port USB3.0 to PCIe Slot ASM1187 Riser Card

Chipset: ASMedia ASM1187 Host Interface: PCIe 2.0 x1
Main function: Split a single PCIe x1 lane into six separate x1 lanes
Dimension: 118 x 59 mm(PCI Board) Product weight: 61.8 g
Accessories: 1 x Anti-static bag, 1 x Neutral box


PW415

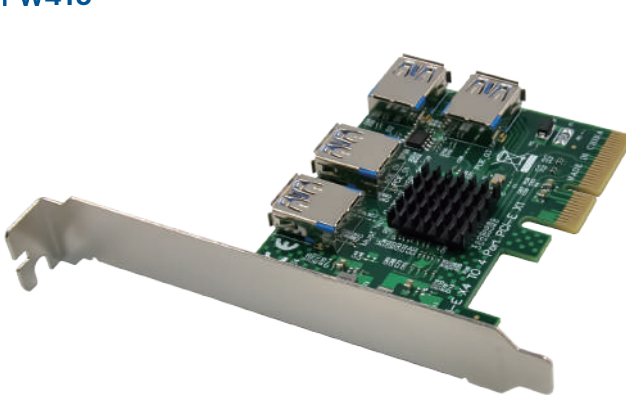

PCIe x4 4-Port USB3.0 to PCIe Slot ASM1184 Riser Card

Chipset: ASMedia ASM1184e Host Interface: PCIe 2.0 x4
Main function: Split a single PCIe x4 lane into four separate x1 lanes
Dimension: 79 x 60 mm(PCle Board) Product weight: 43.8 g
Accessories: 1 x Anti-static bag, 1 x Neutral box

PW413

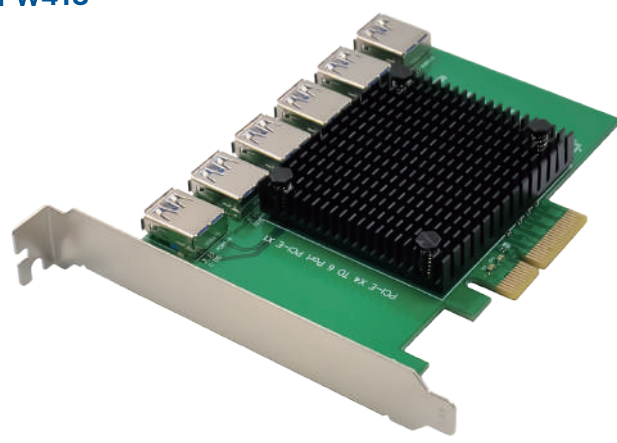

PCIe x4 4-Port USB3.0 to PCIe Slot ASM1812 Riser Card

Chipset: ASMedia ASM1812 Host Interface: PCIe 2.0 x4
Main function: Split a single PCIe x4 lane into six separate x1 lanes
Dimension: x mm(PCle Board) Product weight: 105 g
Accessories: 1 x Anti-static bag, 1 x Neutral box

PW115

PW114

Product Updates
stay tuned

Drive-free

Drive-free

PCle X1 CM6635 Fiber Coax Digital HiFi Sound Card

Chipset: Cmedia CM6635 + Interface: 4 x Audio jack
Sampling rate: 44.1KHz/48KHz, Resolution: 16/24bit, SNR: ≥90dB

Dimension: 150 x 66 mm (PCle Board) Product weight: 90 g
Accessories: 1 x Low profile bracket, 1 x Anti-static bag
1 x Neutral box

PCle X1 CM108AH Fiber Coax Digital HiFi Sound Card

Chipset: Cmedia CM108AH + Interface: 4 x Audio jack
Sampling rate: 44.1KHz/48KHz, Resolution: 16/24bit, SNR: ≥90dB

Dimension: 141 x 66 mm (PCle Board) Product weight: 80 g
Accessories: 1 x Low profile bracket, 1 x Anti-static bag
1 x Neutral box

PW113

PW112

Drive-free

PCle X1 SSS1700 Fiber Coax Digital HiFi Sound Card

Chipset: 3S SSS1700 + Interface: 5 x Audio jack
Sampling rate: 44.1/48/96KHz, Resolution: 16/24bit, SNR: ≥91dB

Dimension: 149 x 66 mm (PCle Board) Product weight: 77 g
Accessories: 1 x Low profile bracket, 1 x Anti-static bag
1 x Neutral box

PCle X1 CM8828 7.1-Channel TXCO Stereo Sound Card

Chipset: CM8828 + CM9882A Interface: 5 x Audio jack
Sampling rate: 44.1~192KHz, Resolution: 16/24bit, SNR: 100dB

Dimension: 149 x 65 mm(PCle Board) Product weight: 68.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box

PW18

PW19

PCle X1 CM8828 7.1-CH HD Audio Surround Sound Card

Chipset: CM8828 + CM9882A Interface: 8 x Audio jack
Sampling rate: 44.1~192KHz, Resolution: 16/24bit, SNR: 100dB

Dimension: 110 x 70 mm(PCle Board) Product weight: 60.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box

PCle X1 CM8828 7.1-CH Fiber Coax Digital Sound Card

Chipset: CM8828 + CM9882A Interface: 10 x Audio jack
Sampling rate: 44.1~192KHz, Resolution: 16/24bit, SNR: 100dB

Dimension: 110 x 70 mm(PCle Board) Product weight: 120 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-static bag
1 x Neutral box, 1 x Digital Audio Front Panel extension

PW14

PW111

PCle x1 CMi8738 4-CH 3D Stereo Surround Sound Card

Chipset: CMi8738 + ASM1083 Interface: 5 x Audio jack
Sampling rate: 44.1KHz/48KHz Resolution: 16/24-bit


Dimension: 93 x 63 mm(PCle Board) Product weight: 45 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PCle X1 CM8828 7.1CH TXCO Stereo Sound Card PRO

Chipset: CM8828 + CM9882A Interface: 8 x Audio jack
Sampling rate: 44.1~192KHz, Resolution: 16/24bit, SNR: 100dB

Dimension: 155 x 100 mm(PCle Board) Product weight: 111.3 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box

PW22

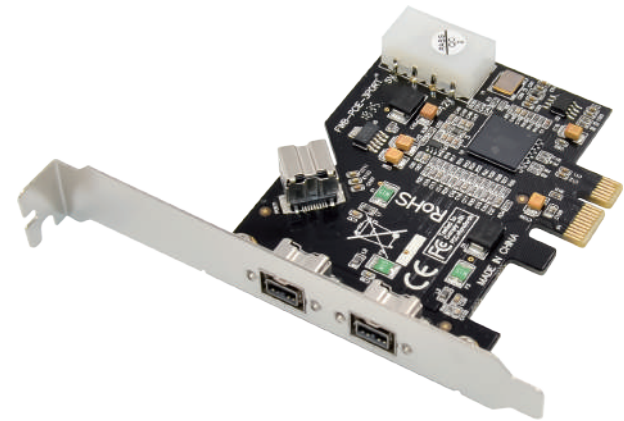


Drive-free

PCIe x1 XIO2213B 3-Port IEEE1394B 2+1 FireWire Card

Chipset: TI XIO2213BZAY Interface: IEEE 1394B(2+1) port
Data Transfer Rate: Supported 100M/200M 400M/800M Bits/s
Dimension: 87 x 69 mm(PCIe Board) Product weight: 45.3 g
Accessories: 1 x Anti-static bag, 1 x Neutral box

PW23

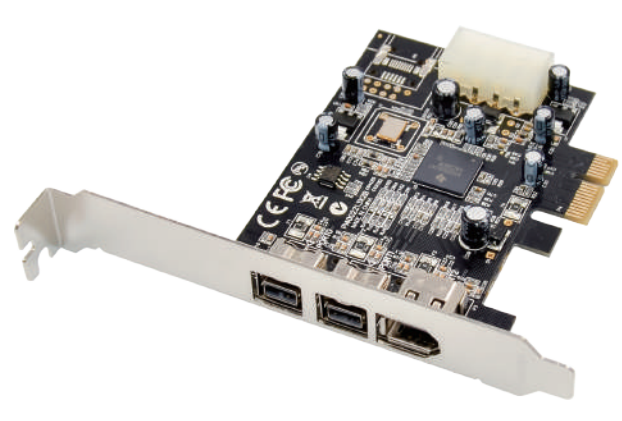


Drive-free

PCIe x1 XIO2213B 3-Port IEEE1394 2B1A FireWire Card

Chipset: TI XIO2213BZAY Interface: IEEE 1394(2B+1A) port
Data Transfer Rate: Supported 100M/200M 400M/800M Bits/s
Dimension: 87 x 69 mm(PCIe Board) Product weight: 46 g
Accessories: 1 x Anti-static bag, 1 x Neutral box

PW24

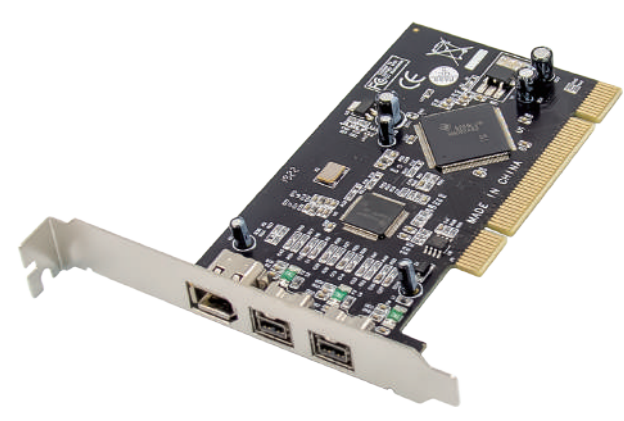


Drive-free

PCI TSB81BA3 3-Port IEEE 1394 2B1A FireWire Card

Chipset: TSB81BA3+SN082AA2 Interface: IEEE 1394(2B+1A) port
Data Transfer Rate: Supported 100M/200M 400M/800M Bits/s
Dimension: 120 x 67 mm(PCI Board) Product weight: 51.6 g
Accessories: 1 x Anti-static bag, 1 x Neutral box


PW21

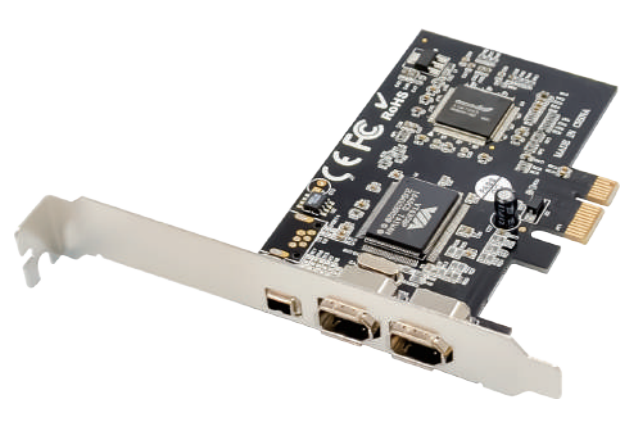

PCIe x1 VT6308P 3-Port IEEE1394A 2+1 FireWire Card

Chipset: VIA VT6308P Interface: IEEE 1394A 2+1 port
Data Transfer Rate: Supported 100M/200M 400M Bits/s
Dimension: 99 x 63 mm(PCIe Board) Product weight: 43 g
Accessories: 1 x Anti-static bag, 1 x Neutral box

PW26

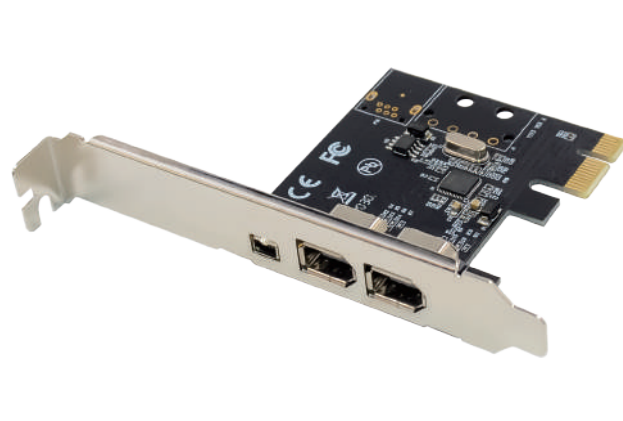

PCIe x1 VT6315N 3-Port IEEE1394A 2+1 FireWire Card

Chipset: VIA VT6315N Interface: IEEE 1394A 2+1 port
Data Transfer Rate: Supported 100M/200M 400M Bits/s
Dimension: 76 x 55 mm(PCIe Board) Product weight: 35 g
Accessories: 1 x Anti-static bag, 1 x Neutral box


PW25



PCIe x1 VT6315N 4-Port IEEE1394A 3+1 FireWire Card

Chipset: VIA VT6315N Interface: IEEE 1394A 3+1 port
Data Transfer Rate: Supported 100M/200M 400M Bits/s
Dimension: 76 x 55 mm(PCIe Board) Product weight: 38 g
Accessories: 1 x Anti-static bag, 1 x Neutral box

PW27

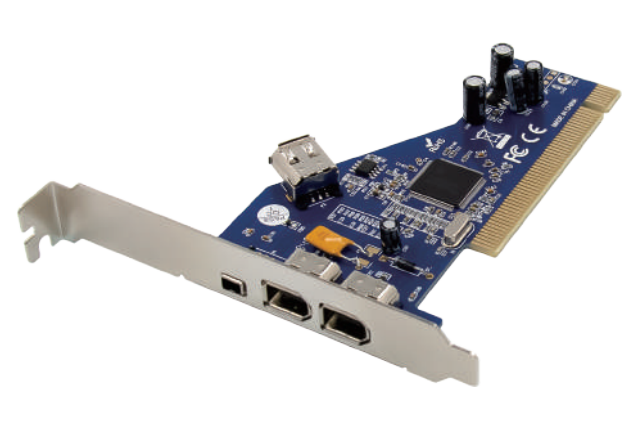

PCI TSB43AB23 4-Port IEEE 1394A 3+1 FireWire Card

Chipset: TSB43AB23 Interface: IEEE 1394A 3+1 port
Data Transfer Rate: Supported 100M/200M 400M Bits/s
Dimension: 114 x 63 mm(PCI Board) Product weight: g
Accessories: 1 x Anti-static bag, 1 x Neutral box

PW

Product Updates
stay tuned

PCIe X1 CM8828 7.1CH TXCO Stereo Sound Card PRO

Chipset: CM8828 + CM9882A Interface: 8 x Audio jack
Sampling rate: 44.1~192KHz, Resolution: 16/24bit, SNR: 100dB
Dimension: 155 x 100 mm(PCIe Board) Product weight: 111.3 g
Accessories: 1 x CD-Driver, 1 x Anti-static bag, 1 x Neutral box