PW7339



PCIe 4.0 RDMA

PCIex16 E810CQDA2 Dual-100GbE QSFP28 Server NIC

Chipset: Intel E810-CAM2 Port Configuration: 2 x QSFP28
Data Rate Per Port: 100/50/25/10GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 173.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7340



PCIe 4.0 RDMA

PCIe x16 E810CQDA1 Single-100GbE QSFP28 Server NIC

Chipset: Intel E810-CAM1 Port Configuration: 1 x QSFP28
Data Rate Per Port: 100/50/25/10GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 165 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7342

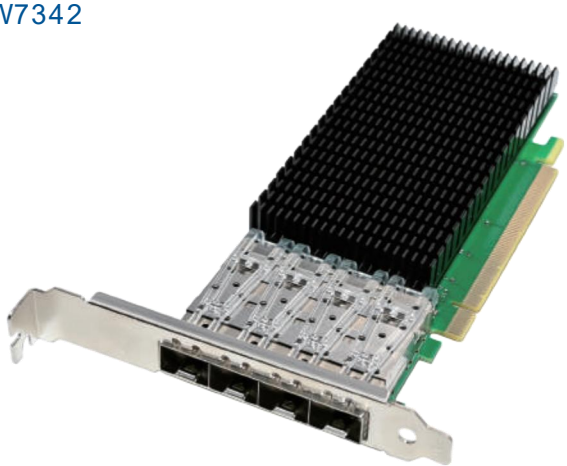

PCIe 4.0 RDMA

PCIe x16 E810-XXVDA4 Quad-25GbE SFP28 Server NIC

Chipset: Intel E810-CAM1 Port Configuration: 4 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 278 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7341



PCIe 4.0 RDMA

PCIe x8 E810-XXVDA2 Dual- 25GbE SFP28 Server NIC

Chipset: Intel E810-XXVAM2 Port Configuration: 2 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 174.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7570



PCIe 5.0

PCIe x16 E835CQDA2 Dual-100GbE QSFP56 Server NIC

Chipset: Intel E835-CQDA2 Port Configuration: 2 x QSFP28
Data Rate Per Port: 100/50/25/10GbE

Dimension: 170 x 69 mm(PCIe Board) Product weight: 170.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW

Product Updates
PWay tuned

PCIe 5.0

PCIe x16 E835CCQDA1 1 x 200GbE QSFP56 Server NIC

Chipset: Intel E830-CCAM1 Port Configuration: 1 x QSFP56
Data Rate Per Port: 200/100/50/25/10GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7571

Product Updates
PWay tuned

PCIe 4.0

PCIe x8 E835-XXVDA2 Dual- 25GbE SFP28 Server NIC

Chipset: Intel E835-XXVAM2 Port Configuration: 2 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 278 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7572

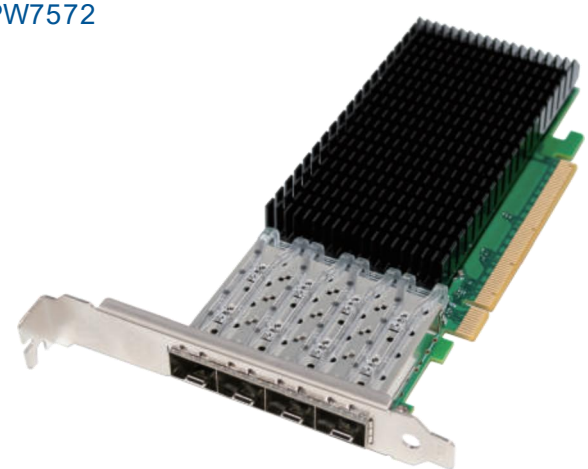

PCIe 5.0

PCIe x16 E835XXVDA4 Quad-25GbE SFP28 Server NIC

Chipset: Intel E835-CCAM1 Port Configuration: 4 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 167 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7329



PCIe 3.0 RDMA

PCIe x8 X722DA4 Quad- 10GbE SFP+ RDMA Server NIC

Chipset: Intel X722-DA4 Port Configuration: 4 x SFP+
Data Rate Per Port: 10GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 203.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7328



PCIe 3.0 RDMA

PCIe x8 X722DA2 Dual- 10GbE SFP+ RDMA Server NIC

Chipset: Intel X722-DA2 Port Configuration: 2 x SFP+
Data Rate Per Port: 10GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 185 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7222



PCIe 3.0

PCIex8 XL710-QDA1 Single- 40GbE QSFP+ Server NIC

Chipset: Intel XL710-BM1 Port Configuration: 1 x QSFP+
Data Rate Per Port: 40/10GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 118.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7448



PCIe 3.0 V2.0

PCIe x8 XL710-QDA2 Dual-40GbE QSFP+ Server NIC2.0

Chipset: Intel XL710-BM2 Port Configuration: 2 x QSFP+
Data Rate Per Port: 40/10GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 163 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7220
PW7538



PCIe 3.0 x8 XXV710DA2 Dual-25GbE SFP28 Server NIC

Chipset: Intel XXV710-AM2 Port Configuration: 2 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 106.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

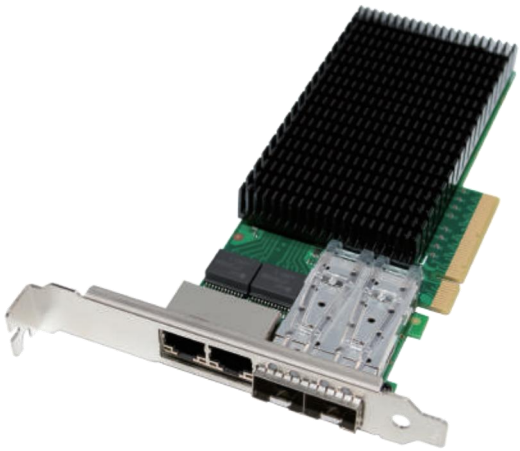

PCIe x8 X710-TM4 10GbE T2&F2 Converged Server NIC

Chipset: Intel X710-TM4 Port Configuration: 2 x SFP+
Data Rate Per Port: 10/5/2.5/1GbE, 100Mb 2 x RJ45

Dimension: 157 x 69 mm(PCIe Board) Product weight: 168.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7218
PW7219



PCIex8 X710DA2 Dual-10G SFP+ Server Converged NIC

Chipset: Intel X710-BM2 Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 132.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

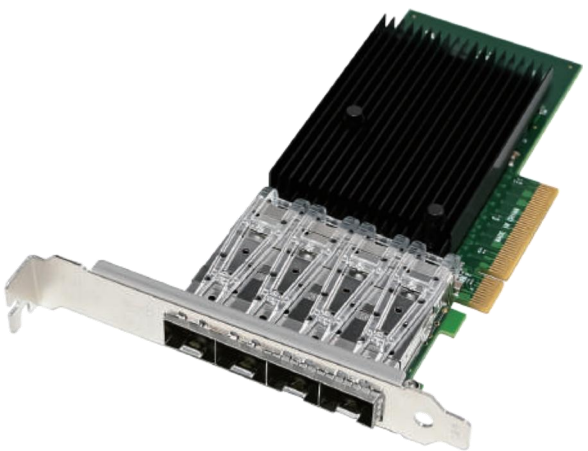

PCIe x8 X710DA4 Quad-10G SFP+ Server Converged NIC

Chipset: Intel XL710-BM1 Port Configuration: 4 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 147.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7268
PW7313



PCIe x8 X520-DA2 Dual- 10GbE SFP+ Fiber Server NIC

Chipset: Intel 82599ES Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 105.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x8 X520 Quad-10GbE SFP+ Server Converged NIC

Chipset: Intel 82599ES+PEX8747 Port Configuration: 4 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 186.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7379
PW7327

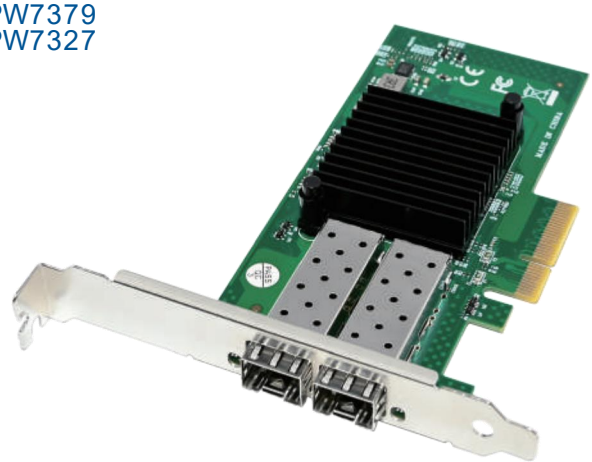

PCIe x4 X520-DA2 Dual- 10GbE SFP+ Fiber Server NIC

Chipset: Intel 82599ES Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 130 x 69 mm(PCIe Board) Product weight: 127.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x8 X520-DA2 Dual- 10GbE SFP+ Fiber Server NIC

Chipset: Intel 82599ES Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 130 x 69 mm(PCIe Board) Product weight: 123.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7315



PCIe 2.0 PXE / UEFI

PCIe x4 X520-DA1 Single-10GbE SFP+ Fiber Server NIC

Chipset: Intel 82599EN Port Configuration: 1 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 130 x 69 mm(PCIe Board) Product weight: 76.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7316



PCIe 2.0 PXE / UEFI

PCIe x8 X520-DA1 Single-10GbE SFP+ Fiber Server NIC

Chipset: Intel 82599EN Port Configuration: 1 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 130 x 69 mm(PCIe Board) Product weight: 77.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7278



PCIe 2.0 V2.0

PCIe x8 X520-DA1 Single-10GbE SFP+ Fiber Server NIC

Chipset: Intel 82599EN Port Configuration: 1 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 95.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7468



PCIe 2.0 V2.1

PCIe x8 X520-DA1 Single-10GbE SFP+ Fiber Server NIC

Chipset: Intel 82599EN Port Configuration: 1 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 130 x 69 mm(PCIe Board) Product weight: 74.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7498
PW7526



PCIe x4 X520-DA1 Single-10GbE SFP+ Fiber Server NIC

Chipset: Intel 82599EN Port Configuration: 1 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 119 x 67 mm(PCIe Board) Product weight: 89.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x1 X520-DA1 Single-10GbE SFP+ Fiber Server NIC

Chipset: Intel 82599EN Port Configuration: 1 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 130 x 69 mm(PCIe Board) Product weight: 75 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7211
PW723



PCIe x8 X520-DA1 Single-10GbE SFP+ Fiber Server NIC

Chipset: Intel 82599EN Port Configuration: 1 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 145 x 69 mm(PCIe Board) Product weight: 98.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x8 X520-DA2 Dual- 10GbE SFP+ Fiber Server NIC

Chipset: Intel 82599ES Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 145 x 69 mm(PCIe Board) Product weight: 107.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7407
PW7212



PCIe x1 I350-F4 Quad-Port 1GbE SFP Fiber Server NIC

Chipset: Intel I350AM4 Port Configuration: 4 x SFP
Data Rate Per Port: 1GbE

Dimension: 120 x 69 mm(PCIe Board) Product weight: 83.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x4 I350-F4 Quad-Port 1GbE SFP Fiber Server NIC

Chipset: Intel I350AM4 Port Configuration: 4 x SFP
Data Rate Per Port: 1GbE

Dimension: 120 x 69 mm(PCIe Board) Product weight: 83.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW72



PCIe 2.1

PCIe x4 I350-F2 Dual-Port 1GbE SFP Fiber Server NIC

Chipset: Intel I350AM2 Port Configuration: 2 x SFP
Data Rate Per Port: 1GbE

Dimension: 113 x 69 mm(PCIe Board) Product weight: 82 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7256



PCIe 2.1

PCIe x1 I350-F2 Dual-Port 1GbE SFP Fiber Server NIC

Chipset: Intel I350AM2 Port Configuration: 2 x SFP
Data Rate Per Port: 1GbE

Dimension: 113 x 69 mm(PCIe Board) Product weight: 80 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW722
PW7404



PCIe x4 82576 Dual-Port 1GbE SFP Fiber Server NIC

Chipset: Intel 82576EB
Port Configuration: 2 x SFP
Data Rate Per Port: 1GbE

Dimension: 113 x 69 mm(PCIe Board)
Product weight: 65 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

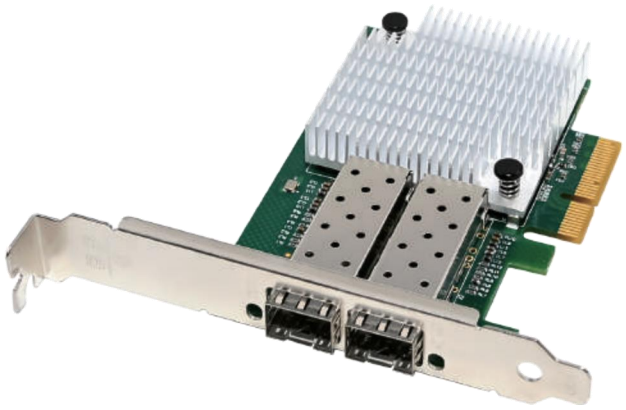

PCIe x4 82576 Dual-Port 1GbE SFP Fiber Server NIC 2.0

Chipset: Intel 82576EB
Port Configuration: 2 x SFP
Data Rate Per Port: 1GbE

Dimension: 98 x 69 mm(PCIe Board)
Product weight: 81.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7257



PCIe 2.0

PCIe x1 82576 Dual-Port 1GbE SFP Fiber Server NIC

Chipset: Intel 82576EB
Port Configuration: 2 x SFP
Data Rate Per Port: 1GbE

Dimension: 113 x 69 mm(PCIe Board)
Product weight: 62 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW729



PCIe 2.0

PCIe x1 82576 Single-Port 1GbE SFP Fiber Server NIC

Chipset: Intel 82576EB
Port Configuration: 1 x SFP
Data Rate Per Port: 1GbE

Dimension: 98 x 69 mm(PCIe Board)
Product weight: 59.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7390
PW721

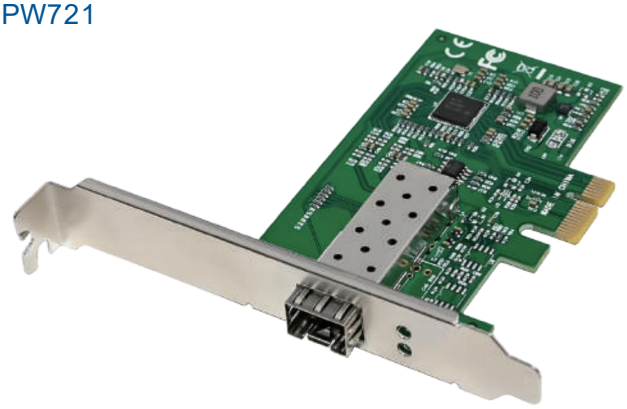

PCIe x1 I210-F1 Single-Port 1GbE SFP Fiber Server NIC

Chipset: Intel I210CS
Port Configuration: 1 x SFP
Data Rate Per Port: 1GbE

Dimension: 96 x 62 mm(PCIe Board)
Product weight: 42.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

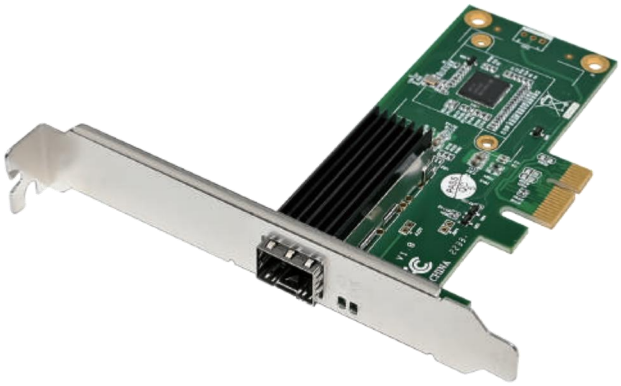

PCIe x1 I210-F1 Single-Port 1GbE SFP Fiber Server NIC

Chipset: Intel I210CS
Port Configuration: 1 x SFP
Data Rate Per Port: 1GbE

Dimension: 105 x 56 mm(PCIe Board)
Product weight: 42.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW728

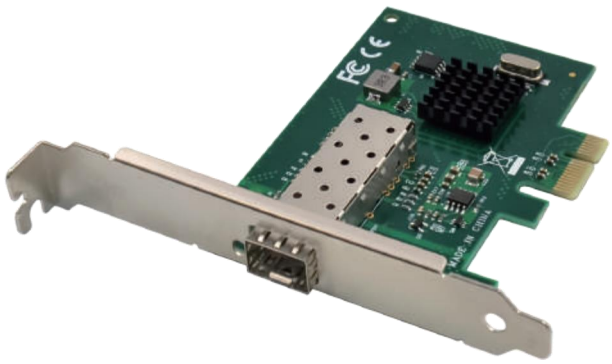

PCIe 2.0

PCIe BCM5720 Single-Port 1GbE SFP Fiber Server NIC

Chipset: Broadcom BCM5720
Port Configuration: 1 x SFP
Data Rate Per Port: 1GbE

Dimension: 88 x 68 mm(PCIe Board)
Product weight: 47 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7263

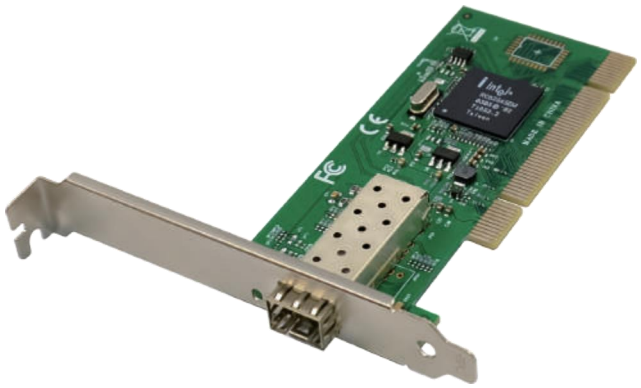

PCIe 2.0

PCI RC82545EM Single- 1GbE SFP Fiber Ethernet NIC

Chipset: Intel RC82545EM
Port Configuration: 1 x SFP
Data Rate Per Port: 1GbE

Dimension: 120 x 53 mm(PCI Board)
Product weight: 46.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7441



PCIe 5.0 PXE, UEFI

PCIe 5.0 x16 ConnectX-7 400GbE OSFP InfiniBand NIC

Chipset: MT29108A Port Configuration: 1 x OSFP
Data Rate Per Port: 400/200/100/50/25/10GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 203.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW

Product Updates
PWay tuned

PCIe 5.0 RDMA

PCIe 5.0 x16 ConnectX-7 200GbE OSFP InfiniBand NIC

Chipset: MT29108A Port Configuration: 1 x OSFP
Data Rate Per Port: 200/100/50/25/10GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 203.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7439



PCIe 5.0 PXE, UEFI

PCIe x16 ConnectX-7 Dual 200GbE QSFP112 Server NIC

Chipset: MT29108A Port Configuration: 2 x QSFP112
Data Rate Per Port: 200/100/50/25/10GbE

Dimension: 170 x 69 mm(PCIe Board) Product weight: 183.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7438



PCIe 4.0 PXE, UEFI

PCIe x16 ConnectX-6 Dual-200GbE QSFP56 Server NIC

Chipset: MT28908A Port Configuration: 2 x QSFP56
Data Rate Per Port: 200/100/50/40/25/10GbE

Dimension: 170 x 69 mm(PCIe Board) Product weight: 183.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7436

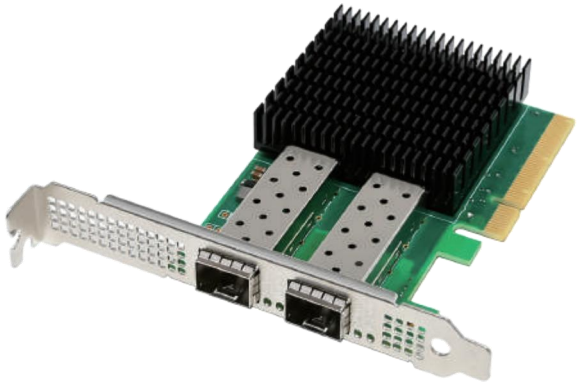

PCIe 4.0 PXE, UEFI

PCIe 4.0 x8 ConnectX-6 Dual-25GbE SFP28 Server NIC

Chipset: MT28942A Port Configuration: 2 x SFP28
Data Rate Per Port: 25/10GbE

Dimension: 95 x 69 mm(PCIe Board) Product weight: 93.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7437



PCIe 4.0 PXE, UEFI

PCIe x16 ConnectX-6 Dual-100GbE QSFP28 Server NIC

Chipset: MT28928A Port Configuration: 2 x QSFP28
Data Rate Per Port: 100/50/40/25/10GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 147.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7386



PCIe 4.0 PXE, UEFI

PCIe x16 ConnectX-5 Dual-100GbE QSFP28 Server NIC

Chipset: MT28808A Port Configuration: 2 x QSFP28
Data Rate Per Port: 100/50/40/25/10/1GbE

Dimension: 150 x 68 mm(PCIe Board) Product weight: 155.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7338



PCIe 3.0 PXE, UEFI

PCIe x16 ConnectX-5 Dual-100GbE QSFP28 Server NIC

Chipset: MT27808A Port Configuration: 2 x QSFP28
Data Rate Per Port: 100/50/40/25/10/1GbE

Dimension: 170 x 69 mm(PCIe Board) Product weight: 183.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7548



PCIe 3.0 PXE, UEFI

PCIe x8 ConnectX-4 LX Single-25GbE SFP28 Server NIC

Chipset: MT27711A Port Configuration: 1 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 147 x 68 mm(PCIe Board) Product weight: 138 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7337

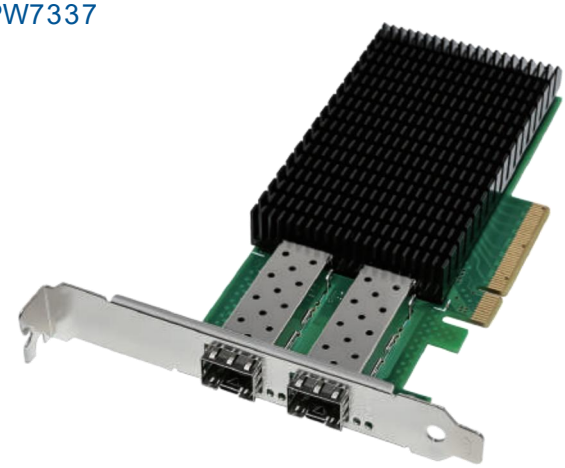

PCIe 3.0 PXE, UEFI

PCIe 3.0 x8 ConnectX-5 Dual-25GbE SFP28 Server NIC

Chipset: MT28808A Port Configuration: 2 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 145 x 68 mm(PCIe Board) Product weight: 137.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7330



PCIe 3.0 PXE, UEFI

PCIe x8 ConnectX-4 Single- 50GbE QSFP28 Server NIC

Chipset: MT27711A Port Configuration: 1 x QSFP28
Data Rate Per Port: 50/40/25/10/1GbE

Dimension: 150 x 68 mm(PCIe Board) Product weight: 154 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7336



PCIe 3.0 PXE, UEFI

PCIe x16 ConnectX-4 Dual-100GbE QSFP28 Server NIC

Chipset: MT27708A Port Configuration: 2 x QSFP28
Data Rate Per Port: 100/50/40/25/10/1GbE

Dimension: 150 x 68 mm(PCIe Board) Product weight: 156.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7312



PCIe 3.0 PXE, UEFI

PCIe x8 ConnectX-4 LX Dual- 25GbE SFP28 Server NIC

Chipset: MT27711A Port Configuration: 2 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 150 x 68 mm(PCIe Board) Product weight: 139.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7369



PCIe 3.0 PXE, UEFI

PCIe x8 ConnectX-4 LX Dual- 25GbE SFP28 Server NIC

Chipset: MT27711A Port Configuration: 2 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 150 x 68 mm(PCIe Board) Product weight: 153.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7380



PCIe 3.0 PXE, UEFI

PCIe x16 ConnectX-4 LX Quad-10GbE SFP+ Server NIC

Chipset: MT27711A Port Configuration: 4 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 150 x 68 mm(PCIe Board) Product weight: 193.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7350



PCIe 3.0 PXE, UEFI

PCIe x16 ConnectX-4 LX Quad-25GbE SFP28 Server NIC

Chipset: MT27711A Port Configuration: 4 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 150 x 68 mm(PCIe Board) Product weight: 195.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7374

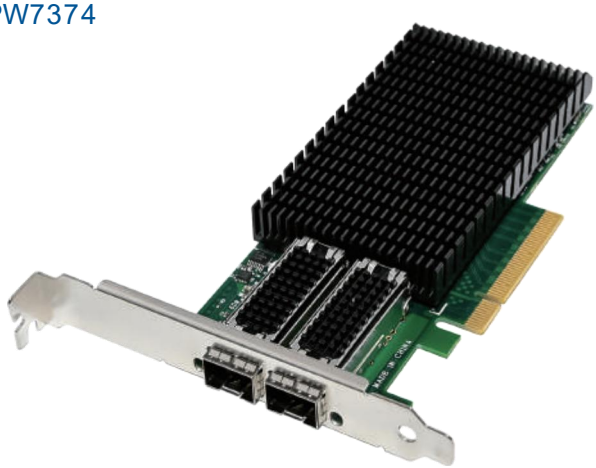

PCIe 3.0 PXE, UEFI

PCIe x8 ConnectX-4 LX Dual- 10GbE SFP+ Server NIC

Chipset: MT27711A Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 150 x 68 mm(PCIe Board) Product weight: 153.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7286



PCIe 3.0 PXE

PCIe 3.0 x8 ConnectX-3 Dual- 10GbE SFP+ Server NIC

Chipset: MT27508A Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 165 x 69 mm(PCIe Board) Product weight: 110.9 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7493



PCIe 3.0 PXE, UEFI

PCIe x8 ConnectX-4 Single- 25GbE SFP28 Server NIC

Chipset: MT27711A Port Configuration: 1 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 142 x 69 mm(PCIe Board) Product weight: 102.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7500



PCIe 3.0 PXE, UEFI

PCIe x8 ConnectX-4 Single- 25GbE SFP28 Server NIC

Chipset: MT27711A Port Configuration: 1 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 145 x 69 mm(PCIe Board) Product weight: 138 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7288



PCIe 3.0 PXE

PCIe 3.0 x8 ConnectX-3 Dual-40GbE QSFP+ Server NIC

Chipset: MT27508A Port Configuration: 2 x QSFP+
Data Rate Per Port: 40/10/1GbE

Dimension: 150 x 68 mm(PCIe Board) Product weight: 139.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7509



PCIe 3.0 PXE, UEFI

PCIe 3.0 x8 ConnectX-3 Dual-40GbE QSFP+ Server NIC

Chipset: MT27508A Port Configuration: 2 x QSFP+
Data Rate Per Port: 40/10/1GbE

Dimension: 142 x 68 mm(PCIe Board) Product weight: 108.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7294



PCIe 3.0 PXE

PCIe x8 ConnectX-3 Single- 40GbE QSFP+ Server NIC

Chipset: MT27508A Port Configuration: 1 x QSFP+
Data Rate Per Port: 40/10/1GbE

Dimension: 150 x 68 mm(PCIe Board) Product weight: 128.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7510



PCIe 3.0 PXE, UEFI

PCIe x8 ConnectX-3 Single- 40GbE QSFP+ Server NIC

Chipset: MT27508A Port Configuration: 1 x QSFP+
Data Rate Per Port: 40/10/1GbE

Dimension: 142 x 68 mm(PCIe Board) Product weight: 98 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7295



PCIe 3.0 PXE

PCIe x8 ConnectX-3 Dual-56GbE QSFP+ InfiniBand NIC

Chipset: MT27508A Port Configuration: 2 x QSFP+
Data Rate Per Port: 56/40/10/1GbE

Dimension: 150 x 68 mm(PCIe Board) Product weight: 139.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7506



PCIe 3.0 PXE, UEFI

PCIe 3.0 x8 ConnectX-3 Dual- 10GbE SFP+ Server NIC

Chipset: MT27508A Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 152 x 69 mm(PCIe Board) Product weight: 108.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7507



PCIe 3.0 PXE, UEFI

PCIe 3.0 x8 ConnectX-3 Single- 10GbE SFP+ Server NIC

Chipset: MT27508A Port Configuration: 1 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 152 x 69 mm(PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7508



PCIe 3.0 PXE, UEFI

PCIe 3.0 x4 ConnectX-3 Single- 10GbE SFP+ Server NIC

Chipset: MT27508A Port Configuration: 1 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 152 x 69 mm(PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7511



PCIe 3.0 PXE, UEFI

PCIe 3.0 x4 ConnectX-3 Dual- 10GbE SFP+ Server NIC

Chipset: MT27508A Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 152 x 69 mm(PCIe Board) Product weight: 113.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7524



PCIe 3.0 PXE, UEFI

PCIe 3.0 x1 ConnectX-3 Single- 10GbE SFP+ Server NIC

Chipset: MT27508A Port Configuration: 1 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 152 x 69 mm(PCIe Board) Product weight: 109.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7306



PCIe 3.0 PXE

PCIe 3.0 x8 ConnectX-3 Single-10GbE SFP+ Server NIC

Chipset: MT27508A Port Configuration: 1 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 165 x 69 mm(PCIe Board) Product weight: 103.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7545



PCIe 3.0 PXE, UEFI

PCIe x8 ConnectX-4 LX Dual- 10GbE SFP+ Server NIC

Chipset: MT27711A Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 147.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7558



PCIe 5.0 RDMA

PCIe 5.0 x16 BCM57608 2x200GbE QSFP112 Server NIC

Chipset: Broadcom BCM57608 Port Configuration: 2 x QSFP112
Data Rate Per Port: 200/100/50/25/10GbE

Dimension: x mm(PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

Product Updates
PWay tuned

PCIe 4.0 RDMA

PCIe 4.0 x16 BCM57508 2x100GbE QSFP28 Server NIC

Chipset: Broadcom BCM57508 Port Configuration: 2 x QSFP28
Data Rate Per Port: 100/50/25/10GbE

Dimension: x mm(PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7444

Product Updates
PWay tuned

PCIe 4.0 RDMA

PCIe 4.0 x16 BCM57504 4 x 25GbE SFP28 Server NIC

Chipset: Broadcom BCM57504 Port Configuration: 4 x SFP28
Data Rate Per Port: 25/10GbE

Dimension: x mm(PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW744



PCIe 3.0 RDMA

PCIe 3.0 x8 BCM57414 Dual- 25GbE SFP28 Server NIC

Chipset: Broadcom BCM57414 Port Configuration: 2 x SFP28
Data Rate Per Port: 25/10GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 123.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7442



PCIe 3.0, PXE / UEFI RDMA

PCIe 3.0 x8 BCM57412 Dual- 10GbE SFP+ Server NIC

Chipset: Broadcom BCM57412 Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 123.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7477



PCIe 3.0, PXE / UEFI

PCIe 3.0 x8 BCM57302 Dual- 10GbE SFP+ Server NIC

Chipset: Broadcom BCM57302 Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 123.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7519



PCIe 3.0, PXE / UEFI RDMA

PCIe 3.0 x8 BCM57412 Single-25GbE SFP28 Server NIC

Chipset: Broadcom BCM57412 Port Configuration: 1 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 109 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7525



PCIe 3.0, PXE / UEFI

PCIe 3.0 x8 BCM57302 Single- 10GbE SFP+ Server NIC

Chipset: Broadcom BCM57302 Port Configuration: 1 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 167 x 69 mm(PCIe Board) Product weight: 109 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7321
PW7322



PCIe 3.0

PCIe 3.0 x8 BCM57810 Dual- 10GbE SFP+ Server NIC

Chipset: Broadcom BCM57810 Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 165 x 68 mm(PCIe Board) Product weight: 117.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe 3.0 x8 BCM57840 Quad- 10GbE SFP+ Server NIC

Chipset: Broadcom BCM57840 Port Configuration: 4 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 165 x 68 mm(PCIe Board) Product weight: 135 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

P

Product Updates
PWay tuned

PCIe 4.0 RMDA

PCIe 4.0 x16 BCM57508 1x100GbE QSFP28 Server NIC

Chipset: Broadcom BCM57508 Port Configuration: 1 x QSFP28
Data Rate Per Port: 100/50/25/10GbE

Dimension: x mm(PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW

Product Updates
PWay tuned

PCIe 4.0 RMDA

PCIe 4.0 x16 BCM57504 1x100GbE QSFP28 Server NIC

Chipset: Broadcom BCM57504 Port Configuration: 1 x QSFP28
Data Rate Per Port: 100/50/25/10GbE

Dimension: x mm(PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7299



PCIe 3.0 V2.0

PCIe x8 X710-T4 4x10GbE RJ45 Converged Server NIC

Chipset: Intel XL710-BM1 + X557 Port Configuration: 4 x RJ45
Data Rate Per Port: 10G/1G/100Mbps

Dimension: 167 x 69 mm(PCIe Board) Product weight: 189.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7561



PCIe 4.0, Low power consumption

PCIe x8 E610-XT4 4x10GbE RJ45 Converged Server NIC

Chipset: Intel E610-XAT2 Port Configuration: 4 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 158 x 69 mm(PCIe Board) Product weight: 185.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7560



PCIe 4.0, Low power consumption

PCIe x4 E610-XT2 2x10GbE RJ45 Converged Server NIC

Chipset: Intel E610-XAT2 Port Configuration: 2 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 150 x 69 mm(PCIe Board) Product weight: 159.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7565



PCIe 4.0, Low power consumption

PCIe x4 E610-XT 1x10GbE RJ45 Converged Server NIC

Chipset: Intel E610-XAT2 Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 150 x 69 mm(PCIe Board) Product weight: 139.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7323
PW7449



PCIe x8 X710-T2L 2x10GbE RJ45 Converged Server NIC

Chipset: Intel X710-AT2 Port Configuration: 2 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 167 x 69 mm(PCIe Board) Product weight: 111.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x8 V710-T2 2x5GbE RJ45 Converged Server NIC

Chipset: Intel V710-AT2 Port Configuration: 2 x RJ45
Data Rate Per Port: 5G/2.5G/1G/100Mbps

Dimension: 167 x 69 mm(PCIe Board) Product weight: 111.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7368
PW7405

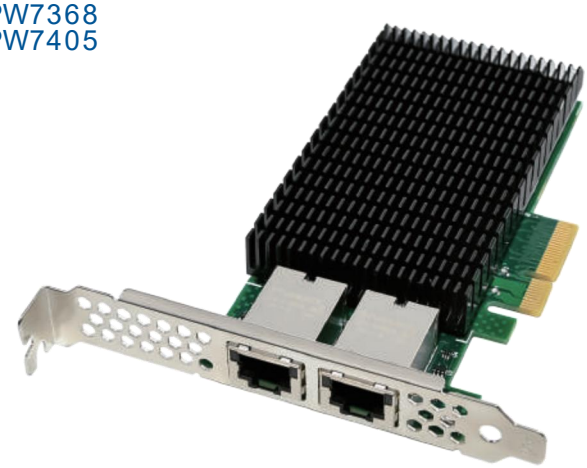

PCIe x4 X550-T2 2x10GbE RJ45 Converged Server NIC

Chipset: Intel X550-AT2 Port Configuration: 2 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 130 x 68 mm(PCIe Board) Product weight: 140.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x4 X550-T2 2x10GbE RJ45 Converged Server NIC

Chipset: Intel X550-AT2 Port Configuration: 2 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 130 x 68 mm(PCIe Board) Product weight: 128.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7280



PCIe 3.0 V2.0

PCIe x8 X550-T2 2x10GbE RJ45 Converged Server NIC

Chipset: Intel X550-BT2 Port Configuration: 2 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 167 x 69 mm(PCIe Board) Product weight: 132.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7352



PCIe 3.0 V2.0

PCIe x4 X550-T2 2x10GbE RJ45 Converged Server NIC

Chipset: Intel X550-BT2 Port Configuration: 2 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 167 x 69 mm(PCIe Board) Product weight: 127.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7216
PW7217



PCIe x4 X550-T2 2x10GbE RJ45 Converged Server NIC

Chipset: Intel X550-AT2 Port Configuration: 2 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 153 x 69 mm(PCIe Board) Product weight: 137 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x4 X550-T1 1x10GbE RJ45 Converged Server NIC

Chipset: Intel X550-AT Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 153 x 69 mm(PCIe Board) Product weight: 130 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7381



PCIe 3.0

PCIe x4 X550-T1 1x10GbE RJ45 Converged Server NIC

Chipset: Intel X550-AT Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 130 x 68 mm(PCIe Board) Product weight: 130.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7307



PCIe 3.0 V2.0

PCIe x8 X550-T1 1x10GbE RJ45 Converged Server NIC

Chipset: Intel X550-BT Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 167 x 69 mm(PCIe Board) Product weight: 114.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7546



PCIe 2.1, PXE / UEFI / WOL

PCIe x8 X540-T1 1x10GbE RJ45 Converged Server NIC

Chipset: Intel X540-AT Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/1G/100Mbps

Dimension: 137 x 68 mm(PCIe Board) Product weight: 143.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7547



PCIe 2.1, PXE / UEFI / WOL

PCIe x4 X540-T1 1x10GbE RJ45 Converged Server NIC

Chipset: Intel X540-AT Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/1G/100Mbps

Dimension: 137 x 68 mm(PCIe Board) Product weight: 135.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7318
PW7319



PCIe x8 X540-T2 2x10GbE RJ45 Converged Server NIC

Chipset: Intel X540-AT2 Port Configuration: 2 x RJ45
Data Rate Per Port: 10G/1G/100Mbps

Dimension: 145 x 69 mm(PCIe Board) Product weight: 149.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x4 X540-T2 2x10GbE RJ45 Converged Server NIC

Chipset: Intel X540-AT2 Port Configuration: 2 x RJ45
Data Rate Per Port: 10G/1G/100Mbps

Dimension: 145 x 69 mm(PCIe Board) Product weight: 148 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7253



PCIe 2.1

PCIe x8 X540-T2 2x10GbE RJ45 Converged Server NIC

Chipset: Intel X540-AT2 Port Configuration: 2 x RJ45
Data Rate Per Port: 10G/1G/100Mbps

Dimension: 153 x 68 mm(PCIe Board) Product weight: 135 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7499



PCIe 2.1, PXE / UEFI

PCIe x4 X540-T1 1x10GbE RJ45 Converged Server NIC

Chipset: Intel X540-AT Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/1G/100Mbps

Dimension: 130 x 67 mm(PCIe Board) Product weight: 96.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7214
PW7215

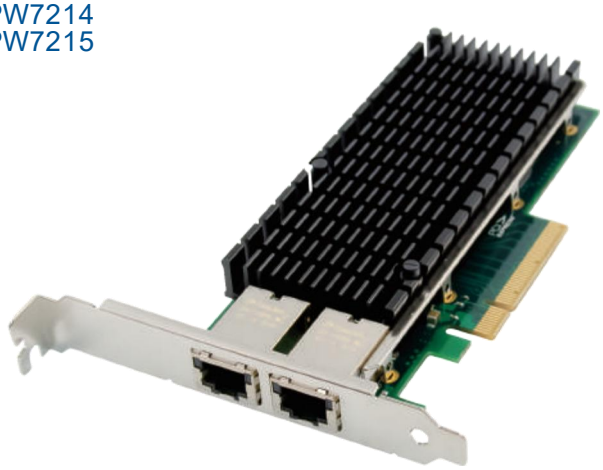

PCIe x8 X540-T2 2x10GbE RJ45 Converged Server NIC

Chipset: Intel X540-AT2 Port Configuration: 2 x RJ45
Data Rate Per Port: 10G/1G/100Mbps

Dimension: 153 x 69 mm(PCIe Board) Product weight: 173 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x8 X540-T1 1x10GbE RJ45 Converged Server NIC

Chipset: Intel X540-AT Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/1G/100Mbps

Dimension: 153 x 69 mm(PCIe Board) Product weight: 163 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7450



PCIe 2.0, PXE / UEFI

PCIe x4 X520-T1 1x10GbE RJ45 Converged Server NIC

Chipset: Intel 82599EN + AQR113 Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M/10Mbps

Dimension: 140 x 69 mm(PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7499



PCIe 2.0, PXE / UEFI / WOL

PCIe x4 X520-T1 1x10GbE RJ45 Converged Server NIC

Chipset: Intel 82599EN + AQR113 Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M/10Mbps

Dimension: 140 x 69 mm(PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7409



PCIe 2.0, PXE / UEFI

PCIe x4 X520-T1 1x10GbE RJ45 Converged Server NIC

Chipset: Intel 82599EN + 88X3310 Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/1G/100M/10Mbps

Dimension: 138 x 67 mm(PCIe Board) Product weight: 106.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7213



PCIe 2.0, PXE / UEFI

PCIe x8 X520-T1 1x10GbE RJ45 Converged Server NIC

Chipset: Intel 82599EN + 88X3310 Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/1G/100M/10Mbps

Dimension: 145 x 69 mm(PCIe Board) Product weight: 106.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7419



PCIe 3.1

PCIe x4 I226-T4 Quad 2.5GbE RJ45 Ethernet Server NIC

Chipset: Intel I226 + Port Configuration: 4 x RJ45
Data Rate Per Port: 2.5G/1G/100M/10Mbps

Dimension: 140 x 69 mm(PCIe Board) Product weight: 159.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7421



PCIe 3.1 V2.0

PCIe x4 I225-T4 Quad 2.5GbE RJ45 Ethernet Server NIC

Chipset: Intel I225+PI7C9X2G608P Port Configuration: 4 x RJ45
Data Rate Per Port: 2.5G/1G/100M/10Mbps

Dimension: 140 x 69 mm(PCIe Board) Product weight: 162 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7470
PW7486

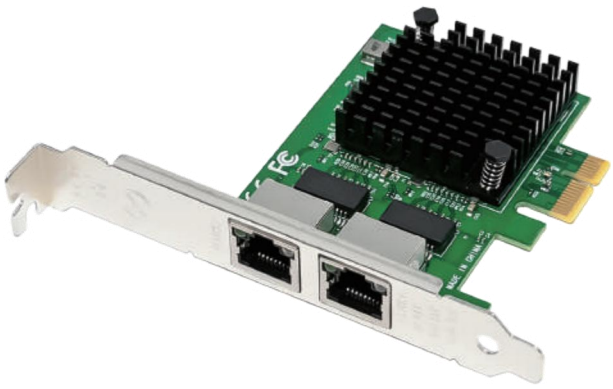

PCIe x1 I226-T2 Dual-2.5GbE RJ45 Ethernet Server NIC

Chipset: Intel I226 + ASM1187 Port Configuration: 2 x RJ45
Data Rate Per Port: 2.5G/1G/100M/10Mbps

Dimension: 82 x 67 mm(PCIe Board) Product weight: 60.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

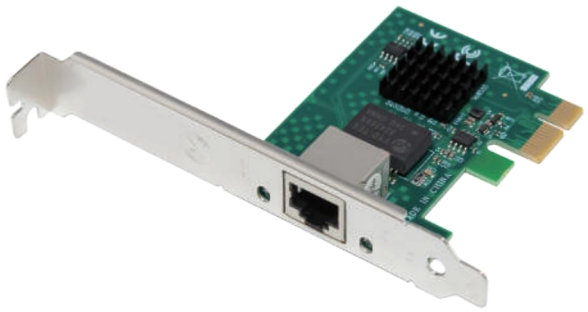

PCIe x1 I226T1 Single 2.5GbE RJ45 Ethernet Server NIC

Chipset: Intel I226 Port Configuration: 1 x RJ45
Data Rate Per Port: 2.5G/1G/100M/10Mbps

Dimension: 72 x 55 mm(PCIe Board) Product weight: 37.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7207
PW7258

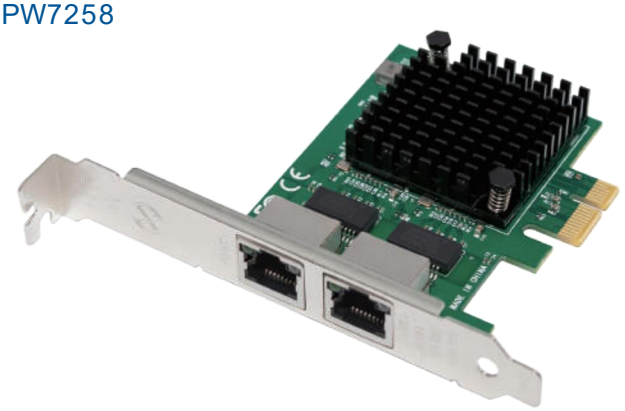

PCIe x1 I225-T2 Dual-2.5GbE RJ45 Ethernet Server NIC

Chipset: Intel I225 + ASM1187 Port Configuration: 2 x RJ45
Data Rate Per Port: 2.5G/1G/100M/10Mbps

Dimension: 82 x 67 mm(PCIe Board) Product weight: 60.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

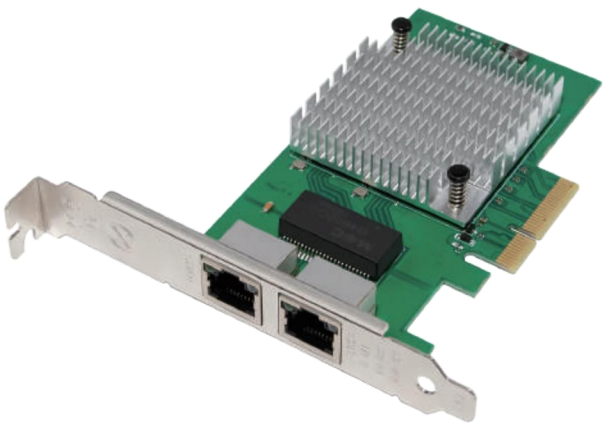

PCIe x4 I225-T2 Dual-2.5GbE RJ45 Ethernet Server NIC

Chipset: Intel I225+PI7C9X2G608P Port Configuration: 2 x RJ45
Data Rate Per Port: 2.5G/1G/100M/10Mbps

Dimension: 116 x 69 mm(PCIe Board) Product weight: 80.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7309
PW7413



PCIe x4 I225T4 Quad 2.5GbE RJ45 Ethernet Server NIC

Chipset: Intel I225 + Port Configuration: 4 x RJ45
Data Rate Per Port: 2.5G/1G/100M/10Mbps

Dimension: 108 x 69 mm(PCIe Board) Product weight: 98.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x1 82572EB Dual- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel 82572EB Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 86 x 68 mm(PCIe Board) Product weight: 65.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7373
PW7376



PCIe x4 I350-T8 Eight- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I350AM4 Port Configuration: 8 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 132 x 98 mm(PCIe Board) Product weight: 262.3 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box



PCIe x4 I350-T6 Six- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I350AM4 Port Configuration: 6 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 132 x 98 mm(PCIe Board) Product weight: 244.8 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box

PW7418
PW7462

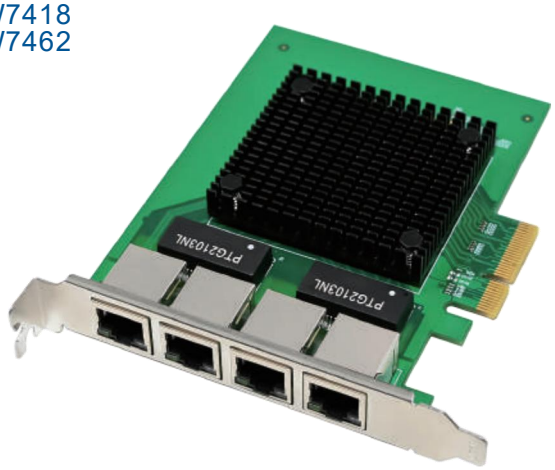

PCIe x4 I350-T4 Quad- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I350AM4 Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 126 x 100 mm(PCIe Board) Product weight: 125.3 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box



PCIe x4 I350-T6 Six- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I350AM4 Port Configuration: 6 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 132 x 98 mm(PCIe Board) Product weight: 213.4 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box

PW7238
PW7233



PCIe x4 I350-T4 Quad- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I350AM4 Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 130 x 69 mm(PCIe Board) Product weight: 84 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x1 I350-T4 Quad- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I350AM4 Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 130 x 69 mm(PCIe Board) Product weight: 83 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7420
PW7308



PCIe x4 I350-T4 Quad- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I350AM4 Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 135 x 69 mm(PCIe Board) Product weight: 104.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x4 I350T4V2 Quad 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I350AM2*2 Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 155 x 68 mm(PCIe Board) Product weight: 125 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW724



PCIe 2.1

PCIe x4 I350-T4 Quad- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I350AM4 Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 100 x 69 mm(PCIe Board) Product weight: 84 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW723



PCIe 2.1

PCIe x1 I350-T4 Quad- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I350AM4 Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 100 x 69 mm(PCIe Board) Product weight: 83 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7232
PW727

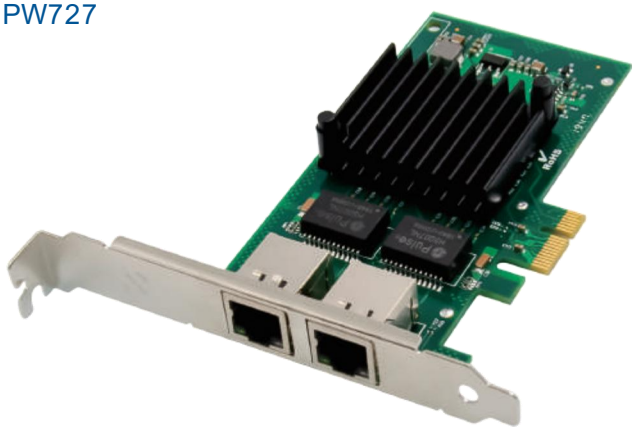

PCIe x1 I350-T2 Dual- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I350AM2 Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 118 x 69 mm(PCIe Board) Product weight: 83.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x4 I350-T2 Dual- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I350AM2 Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 118 x 69 mm(PCIe Board) Product weight: 84.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7372



PCIe 2.1

PCIe x4 I210-T4 Quad- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I210 + Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 145 x 99 mm(PCIe Board) Product weight: 192.7 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box

PW740



PCIe 2.1, WOL

PCIe x4 I210-T4 Quad- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I210+PI7C9X2G608P Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 149 x 68 mm(PCIe Board) Product weight: 173 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7255
PW7385



PCIe x4 I210-T2 Dual- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I210 + PEX8606 Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 123 x 68 mm(PCIe Board) Product weight: 97.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x4 I210-T4 Quad- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I210 + PEX8747 Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 149 x 68 mm(PCIe Board) Product weight: 172.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7492
PW7455

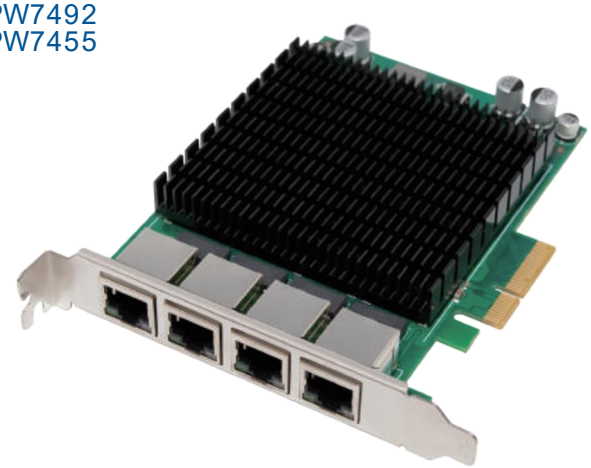

PCIe x4 82574L Quad- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel 82574L + Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 130 x 100 mm(PCIe Board) Product weight: 178.1 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box



PCIe x4 I211-T4 Quad- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I211+PI7C9X2G608P Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 149 x 68 mm(PCIe Board) Product weight: 173 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7260
PW7270



PCIe x4 I340-T4 Quad- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel 82580EB Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 135 x 69 mm(PCIe Board) Product weight: 84 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x1 I340-T4 Quad- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel 82580EB Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 135 x 69 mm(PCIe Board) Product weight: 83 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7259



PCIe 2.0

PCIe x1 I340-T2 Dual- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel 82580EB Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 129 x 68 mm(PCIe Board) Product weight: 85.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7422



PCIe 2.0 V2.0

PCIe x4 I340-T4 Quad- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel 82580EB Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 135 x 69 mm(PCIe Board) Product weight: 119.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7279
PW7297



PCIe x1 82571EB Dual- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel 82571EB
Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 86 x 68 mm(PCIe Board)
Product weight: 65.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x1 82571GB Quad-1GbE RJ45 Ethernet Server NIC

Chipset: Intel 82571GB
Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 132 x 68 mm(PCIe Board)
Product weight: 106.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW725



PCIe 2.0

PCIe x1 82575EB Dual- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel 82575EB
Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 105 x 68 mm(PCIe Board)
Product weight: 74 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7291



PCIe 2.0 V2.0

PCIe x1 82575EB Quad-1GbE RJ45 Ethernet Server NIC

Chipset: Intel 82575EB
Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 158 x 69 mm(PCIe Board)
Product weight: 142 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7239
PW7229



PCIe x1 82576EB Dual- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel 82576EB
Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 113 x 69 mm(PCIe Board)
Product weight: 74 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x1 82576EB Quad-1GbE RJ45 Ethernet Server NIC

Chipset: Intel 82576EB
Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 158 x 69 mm(PCIe Board)
Product weight: 142 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW726



PCIe 2.0

PCIe x4 82576EB Dual- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel 82576EB
Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 113 x 69 mm(PCIe Board)
Product weight: 79 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW723



PCIe 1.1

PCIe x1 82583V Single-1GbE RJ45 Ethernet Server NIC

Chipset: Intel 82583V
Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 103 x 56 mm(PCIe Board)
Product weight: 40.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7252
PW729



PCIe x1 I210-T1 Single- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I210AT
Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 65 x 55 mm(PCIe Board)
Product weight: 36.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x1 I210-T1 Single- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I210AT
Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 93 x 55 mm(PCIe Board)
Product weight: 41.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW722



PCIe 2.1

PCIe x1 I211-T1 Single- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I211AT
Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 80 x 43 mm(PCIe Board)
Product weight: 32.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7204



PCIe 2.1

PCIe x1 I210-T1 Single- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I210AT
Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 80 x 43 mm(PCIe Board)
Product weight: 32.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7416
PW7250



PCI RC82545EM Single-1GbE RJ45 Ethernet Server NIC

Chipset: Intel RC82545EM Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 120 x 63 mm(PCI Board) Product weight: 53.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

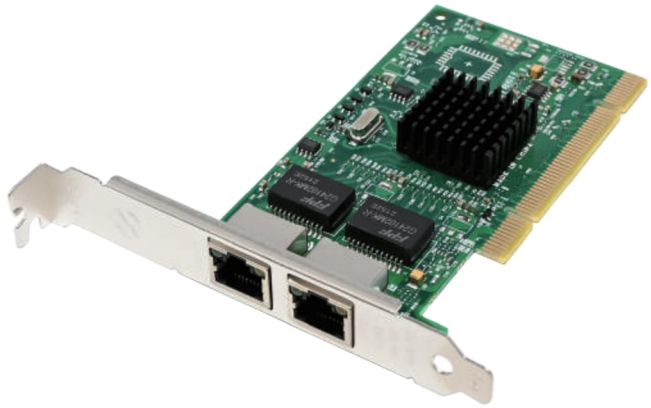

PCI 82546EB Dual-Port 1GbE RJ45 Ethernet Server NIC

Chipset: Intel 82546EB Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 130 x 65 mm(PCI Board) Product weight: 62.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7264

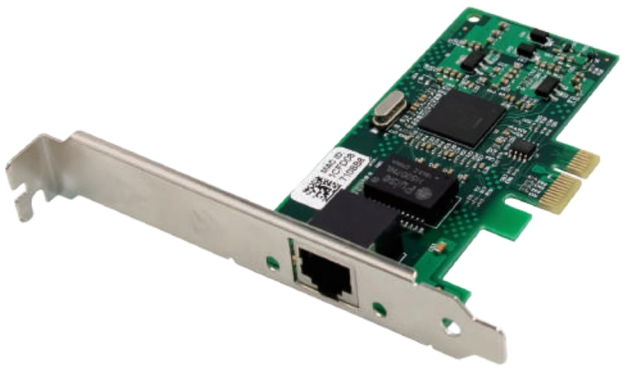

PCIe 1.0

PCIe x1 82573L Single- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel 82573L Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 99 x 50 mm(PCIe Board) Product weight: 40.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW721

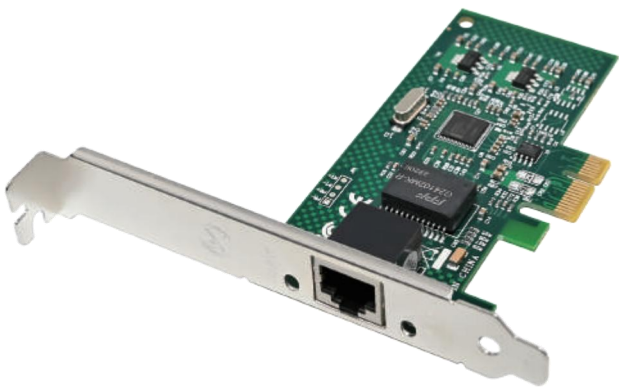

PCIe 1.1

PCIe x1 82574L Single- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel 82574L Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 103 x 56 mm(PCIe Board) Product weight: 40.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7358
PW7488

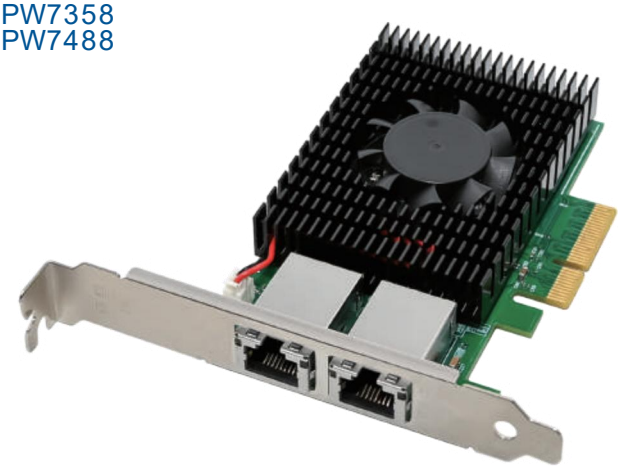

PCIe x4 AQC107S Dual-10GbE RJ45 Ethernet Server NIC

Chipset: Marvell AQC107S + Port Configuration: 2 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M

Dimension: 107 x 69 mm(PCIe Board) Product weight: 126 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

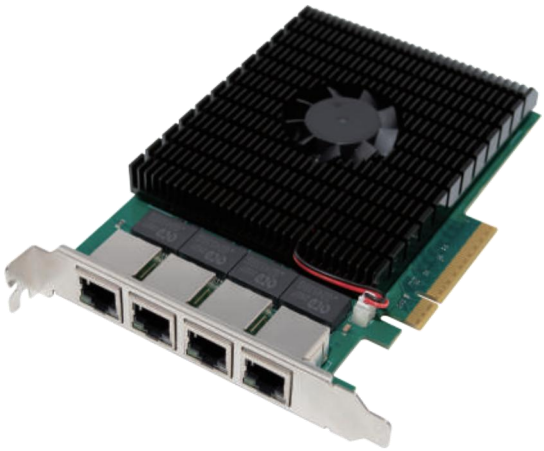

PCIe x8 AQC113 Quad-10GbE RJ45 Ethernet Server NIC

Chipset: Marvell AQC113 + Port Configuration: 4 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M/10M

Dimension: 156 x 104 mm(PCIe Board) Product weight: 264.4 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box

PW7357
PW7356

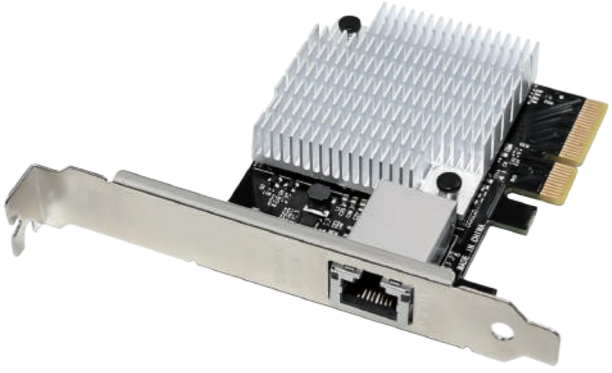

PCIe x4 AQC107S Single-10G RJ45 Ethernet Server NIC

Chipset: Marvell AQC107S Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M

Dimension: 79 x 68 mm(PCIe Board) Product weight: 76.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

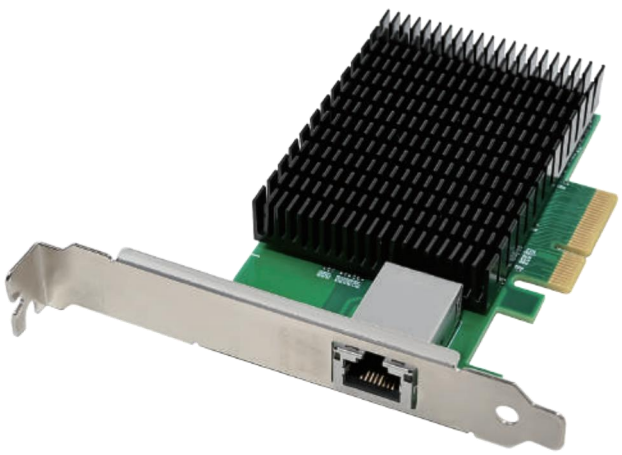

PCIe x4 AQC107S Single-10G RJ45 Ethernet Server NIC

Chipset: Marvell AQC107S Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M

Dimension: 105 x 68 mm(PCIe Board) Product weight: 114.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7406
PW7267

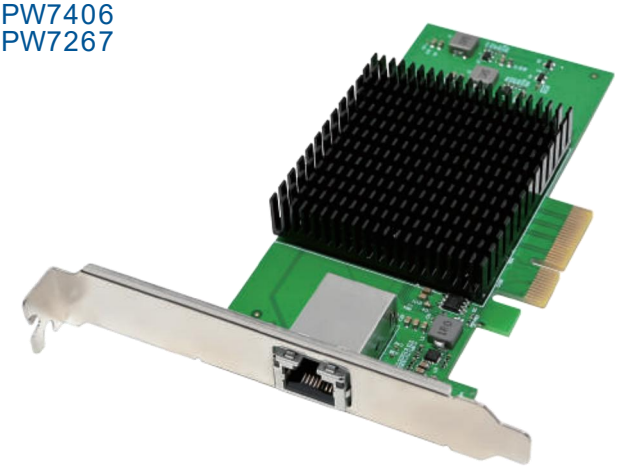

PCIe x4 AQC107 Single- 10G RJ45 Ethernet Server NIC

Chipset: Marvell AQC107 Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M

Dimension: 132 x 69 mm(PCIe Board) Product weight: 100.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

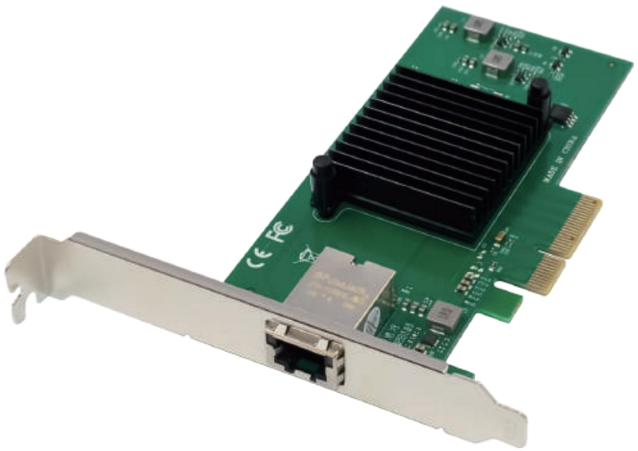

PCIe x4 AQC107 Single- 10G RJ45 Ethernet Server NIC

Chipset: Marvell AQC107 Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M

Dimension: 132 x 68 mm(PCIe Board) Product weight: 75.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7472
PW7473

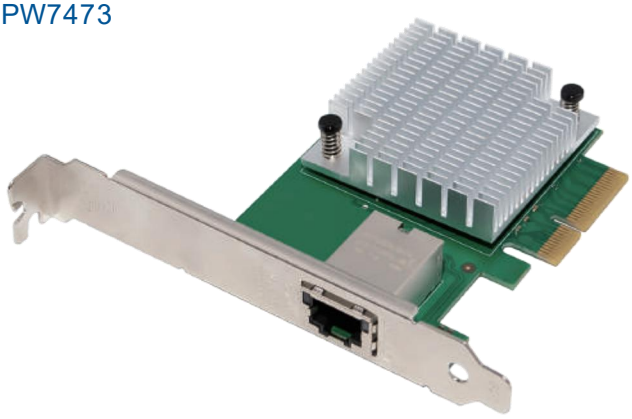

PCIe x4 AQC113 Single- 10G RJ45 Ethernet Server NIC

Chipset: Marvell AQC113 Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M/10M

Dimension: 90 x 67 mm(PCIe Board) Product weight: 80.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

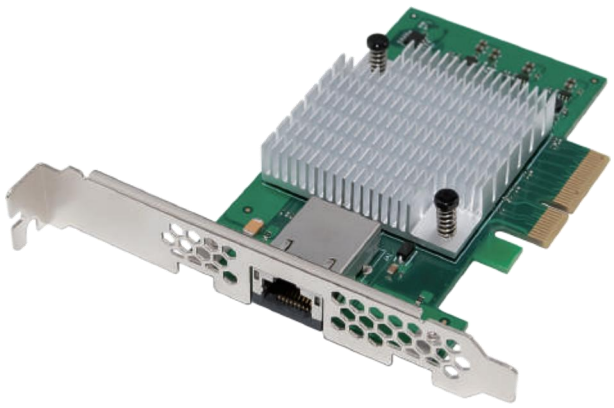

PCIe x4 AQC113 Single- 10G RJ45 Ethernet Server NIC

Chipset: Marvell AQC113 Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M/10M

Dimension: 105 x 68 mm(PCIe Board) Product weight: 77.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7504
PW7505

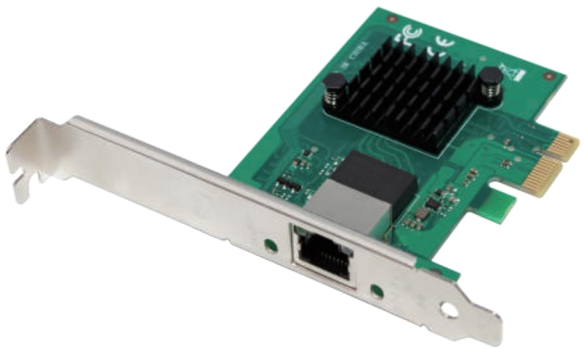

PCIe x1 AQC114 Single-5GbE RJ45 Ethernet Server NIC

Chipset: Marvell AQC114 Port Configuration: 1 x RJ45
Data Rate Per Port: 5G/2.5G/1G/100M/10M

Dimension: 83 x 65 mm(PCIe Board) Product weight: 49.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

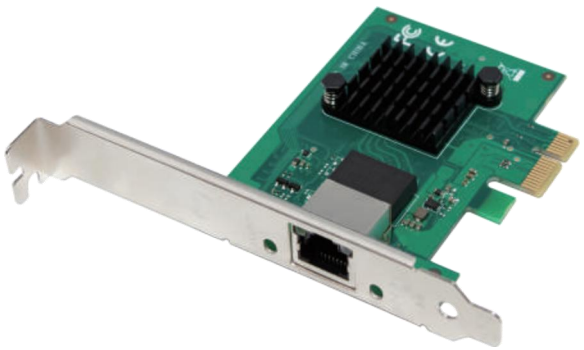

PCIe x1 AQC115 Single- 2.5G RJ45 Ethernet Server NIC

Chipset: Marvell AQC115 Port Configuration: 1 x RJ45
Data Rate Per Port: 2.5G/1G/100M/10M

Dimension: 83 x 65 mm(PCIe Board) Product weight: 49.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW753

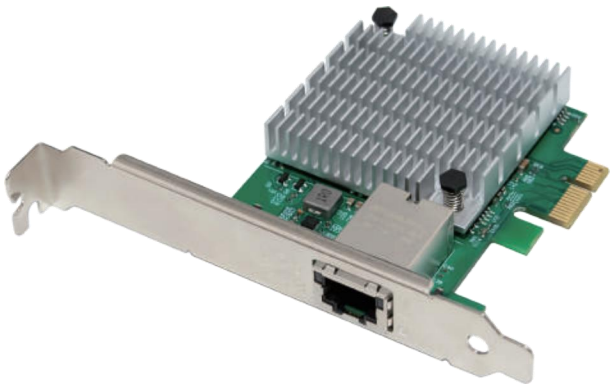

PCIe 3.0

PCIe x1 AQC107 Single- 10G RJ45 Ethernet Server NIC

Chipset: Marvell AQC107 Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M

Dimension: 79 x 68 mm(PCIe Board) Product weight: 76.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7532

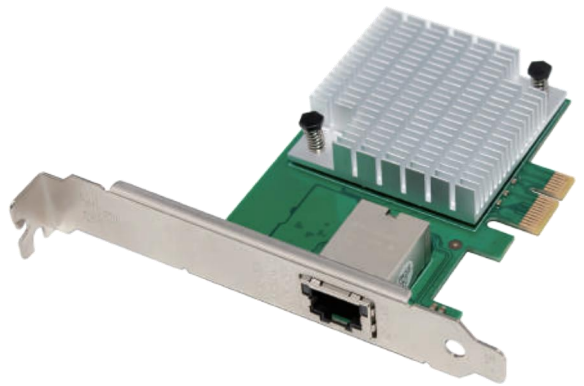

PCIe 4.0

PCIe x1 AQC113 Single- 10G RJ45 Ethernet Server NIC

Chipset: Marvell AQC113 Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M/10M

Dimension: 90 x 67 mm(PCIe Board) Product weight: 77.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7375

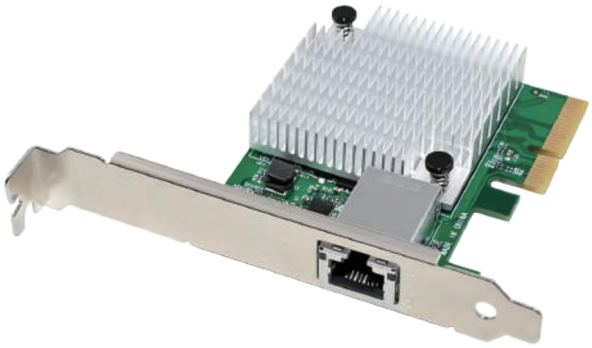

PCIe 3.0

PCIe x4 AQC113C Single-10G RJ45 Ethernet Server NIC

Chipset: Marvell AQC113C Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M/10M

Dimension: 79 x 68 mm(PCIe Board) Product weight: 75 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

P...

Product Updates
PWay tuned

PCIe 3.0

PCIe x1 AQC113C Single-10G RJ45 Ethernet Server NIC

Chipset: Marvell AQC113C Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M/10M

Dimension: 79 x 68 mm(PCIe Board) Product weight: 75 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7425



PCIe 3.0 RMDA

PCIe x8 QL41xx Dual- 10G SFP+ Converged Server NIC

Chipset: Marvell QLogic QL41xx Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 165 x 69 mm(PCIe Board) Product weight: 174.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7426



PCIe 3.0 RMDA

PCIe x8 QL41xx Quad- 10G SFP+ Converged Server NIC

Chipset: Marvell QLogic QL41xx Port Configuration: 4 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 165 x 69 mm(PCIe Board) Product weight: 190.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7446



PCIe 3.0 RDMA

PCIe x8 BCM57416 2x10GbE RJ45 Ethernet Server NIC

Chipset: Broadcom BCM57416 Port Configuration: 2 x RJ45
Data Rate Per Port: 10G/1G/100M/10M

Dimension: 142 x 68 mm(PCIe Board) Product weight: 163.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7484



PCIe 2.1 V2.0

PCIe x4 BCM5719 Quad- 1G RJ45 Ethernet Server NIC

Chipset: Broadcom BCM5719 Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 118 x 68 mm(PCIe Board) Product weight: 84.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7208
PW7209



PCIe x4 BCM5719 Quad- 1G RJ45 Ethernet Server NIC

Chipset: Broadcom BCM5719 Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 118 x 68 mm(PCIe Board) Product weight: 84.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box



PCIe x1 BCM5719 Quad- 1G RJ45 Ethernet Server NIC

Chipset: Broadcom BCM5719 Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 118 x 68 mm(PCIe Board) Product weight: 83.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7284



PCIe 2.1

PCIe x1 BCM5718 Dual- 1G RJ45 Ethernet Server NIC

Chipset: Broadcom BCM5718 Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 75 x 68 mm(PCIe Board) Product weight: 49.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW728



PCIe 2.1

PCIe x1 BCM5720 Dual- 1G RJ45 Ethernet Server NIC

Chipset: Broadcom BCM5720 Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 85 x 68 mm(PCIe Board) Product weight: 51.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW728

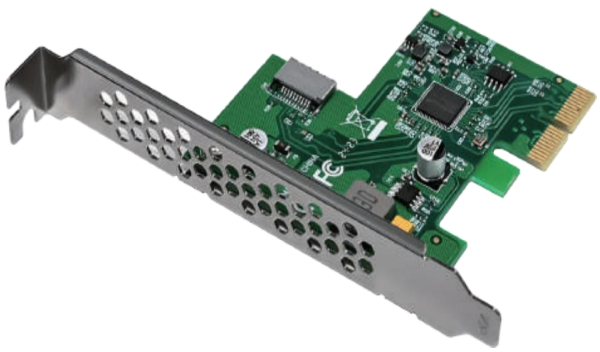

PCIe 1.1

PCIe x1 BCM5721 Single- 1G RJ45 Ethernet Server NIC

Chipset: Broadcom BCM5721 Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 82 x 55 mm(PCIe Board) Product weight: 45.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7292

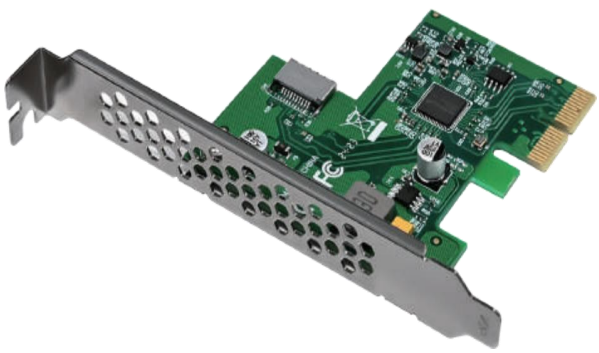

PCIe 1.1

PCIe x1 BCM5751 Single- 1G RJ45 Ethernet Server NIC

Chipset: Broadcom BCM5751 Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 82 x 55 mm(PCIe Board) Product weight: 45.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7533
PW7562

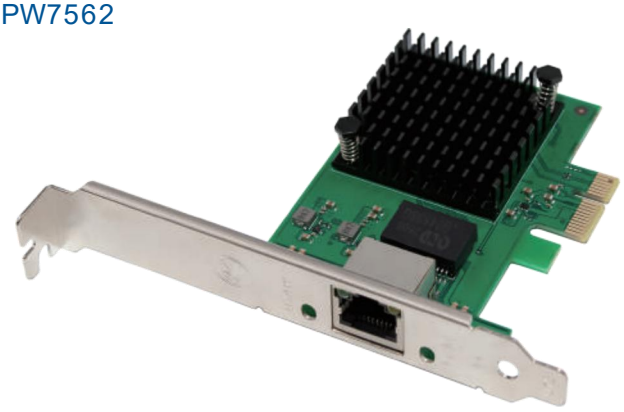

PCIe 4.0 x1 RTL8127AT Single- 10GbE RJ45 Server NIC

Chipset: Realtek RTL8127AT Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M/10Mbps

Dimension: 72 x 42 mm(PCIe Board) Product weight: 57.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

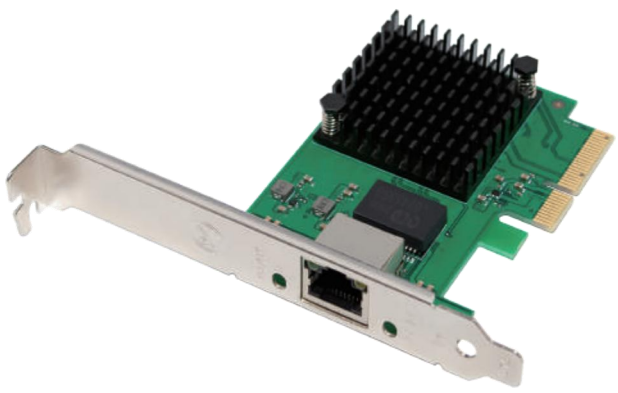

PCIe 3.0 x4 RTL8127AT Single- 10GbE RJ45 Server NIC

Chipset: Realtek RTL8127AT Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M/10Mbps

Dimension: 72 x 42 mm(PCIe Board) Product weight: 57.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW7563
PW7564



PCIe 4.0 x1 RTL8127ATF Single-10GbE SFP+ Server NIC

Chipset: Realtek RTL8127ATF Port Configuration: 1 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 72 x 42 mm(PCIe Board) Product weight: 57.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)



PCIe 3.0 x4 RTL8127ATF Single-10GbE SFP+ Server NIC

Chipset: Realtek RTL8127ATF Port Configuration: 1 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 72 x 42 mm(PCIe Board) Product weight: 58.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW746

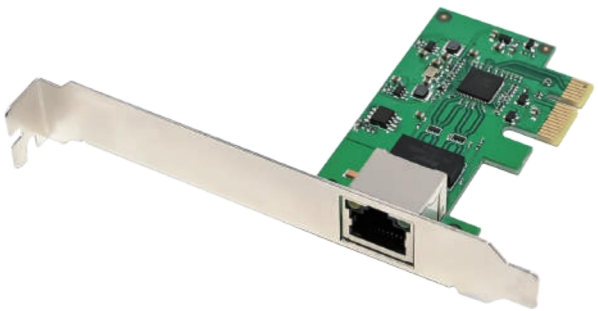

PCIe 3.1

PCIe x1 RTL8126 Single-5GbE RJ45 Ethernet Server NIC

Chipset: Realtek RTL8126 Port Configuration: 1 x RJ45
Data Rate Per Port: 5G/2.5G/1G/100M/10Mbps

Dimension: 72 x 42 mm(PCIe Board) Product weight: 30 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW7266



PCIe 2.1

PCIe x1 8125BG Single-2.5G RJ45 Copper Ethernet NIC

Chipset: Realtek RTL8125BG Port Configuration: 1 x RJ45
Data Transfer Rate: 2.5G/1G/100M/10Mbps

Dimension: 70 x 56 mm(PCIe Board) Product weight: 39 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW727

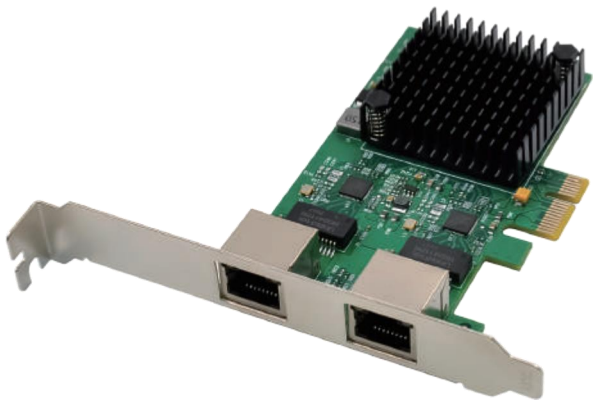

PCIe 2.1

PCIe x1 8125BG Dual-2.5GbE RJ45 Copper Ethernet NIC

Chipset: RTL8125BG+ASM1806 Port Configuration: 2 x RJ45
Data Transfer Rate: 2.5G/1G/100M/10Mbps

Dimension: 100 x 62 mm(PCIe Board) Product weight: 60.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW7276



PCIe 2.1

PCIe x4 8125BG Quad- 2.5G RJ45 Copper Ethernet NIC

Chipset: RTL8125BG+ASM1806 Port Configuration: 4 x RJ45
Data Transfer Rate: 2.5G/1G/100M/10Mbps

Dimension: 108 x 69 mm(PCIe Board) Product weight: 101 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW7447
PW7454



PCIe x4 RTL8125BG Six-2.5G RJ45 Ethernet Server NIC

Chipset: RTL8125BG+ASM1812 Port Configuration: 6 x RJ45
Data Transfer Rate: 2.5G/1G/100M/10Mbps

Dimension: 110 x 98 mm(PCIe Board) Product weight: 194.7 g
Accessories: 1 x CD-Driver, 1 x Neutral box, 1 x User's Manual (OEM)

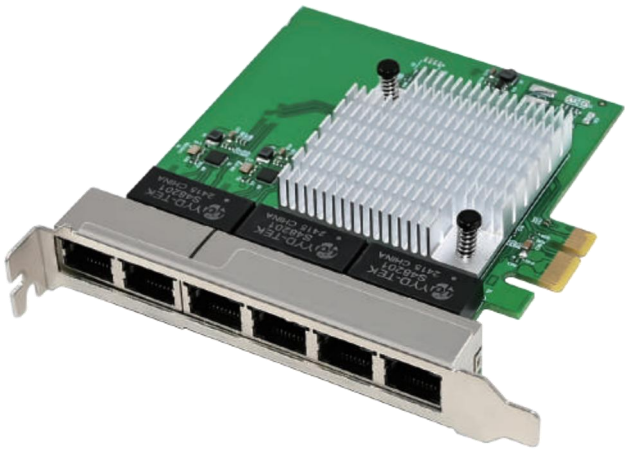

PCIe x1 RTL8111H Six- 1GbE RJ45 Ethernet Server NIC

Chipset: Realtek RTL8111H+ Port Configuration: 6 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 110 x 100 mm(PCIe Board) Product weight: 117.7 g
Accessories: 1 x CD-Driver, 1 x Neutral box, 1 x User's Manual (OEM)

PW7424



PCIe 2.1 V2.0

PCIe x4 8125BG Quad- 2.5G RJ45 Copper Ethernet NIC

Chipset: RTL8125BG+P17C9X2G608 Port Configuration: 4 x RJ45
Data Transfer Rate: 2.5G/1G/100M/10Mbps

Dimension: 123 x 69 mm(PCIe Board) Product weight: 108.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW7487



PCIe 2.1 V3.0

PCIe x4 8125BG Quad- 2.5G RJ45 Copper Ethernet NIC

Chipset: RTL8125BG+PEX8608 Port Configuration: 4 x RJ45
Data Transfer Rate: 2.5G/1G/100M/10Mbps

Dimension: 130 x 69 mm(PCIe Board) Product weight: 140.9 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW7387

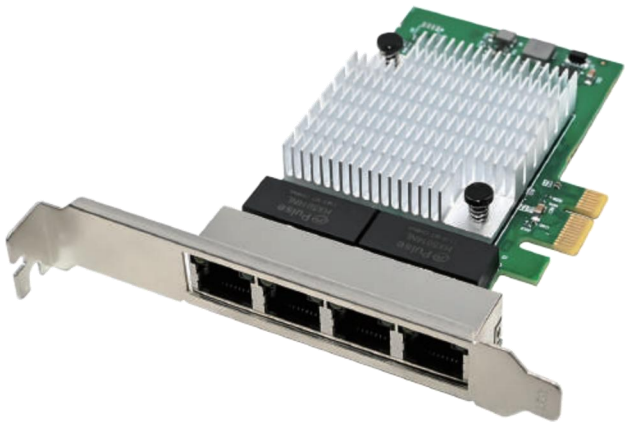

PCIe 1.1 V2.0

PCIe x1 8111H Quad- 1GbE RJ45 Ethernet Network Card

Chipset: RTL8111H+ASM1187 Port Configuration: 4 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 110 x 69 mm(PCIe Board) Product weight: 94.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW7414

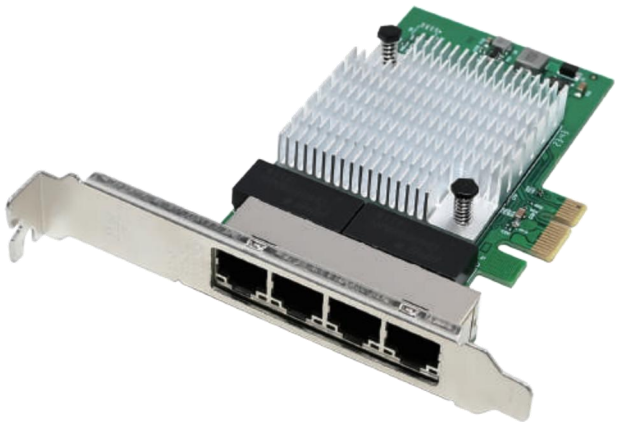

PCIe 1.1 V2.1

PCIe x1 8111H Quad-1GbE RJ45 Ethernet Network Card

Chipset: RTL8111H+ASM1187 Port Configuration: 4 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 110 x 69 mm(PCIe Board) Product weight: 95.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW7244



PCIe 1.1 V2.0

PCIe x1 8111H Dual- 1GbE RJ45 Ethernet Network Card

Chipset: RTL8111H+ASM1182e Port Configuration: 2 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 79 x 60 mm(PCIe Board) Product weight: 50.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW744

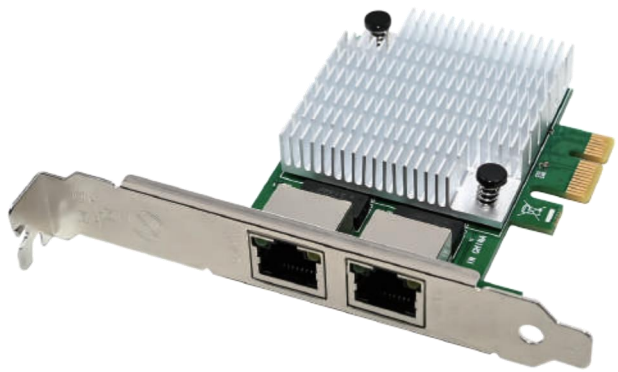

PCIe 1.1 V3.0

PCIe x1 8111H Dual- 1GbE RJ45 Ethernet Network Card

Chipset: RTL8111H+ASM1187 Port Configuration: 2 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 76 x 65 mm(PCIe Board) Product weight: 72.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW7314
PW708



PCIe x1 8111H Quad- 1GbE RJ45 Ethernet Network Card

Chipset: RTL8111H+ASM2806 Port Configuration: 4 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 113 x 67 mm(PCIe Board) Product weight: 80.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)



PCIe x1 8111F Quad- 1GbE RJ45 Ethernet Network Card

Chipset: RTL8111F+ASM1184e Port Configuration: 4 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 100 x 69 mm(PCIe Board) Product weight: 74.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW7311
PW7310



PCIe x1 WX1860 Quad- 1GbE RJ45 Ethernet Server NIC

Chipset: Net-swift WX1860 Port Configuration: 4 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 150 x 68 mm(PCIe Board) Product weight: 110.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x AntiPWatic bag 1 x Neutral box



PCIe x4 WX1860 Quad-1GbE RJ45 Ethernet Server NIC

Chipset: Net-swift WX1860 Port Configuration: 4 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 150 x 68 mm(PCIe Board) Product weight: 112.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x AntiPWatic bag 1 x Neutral box

PW707

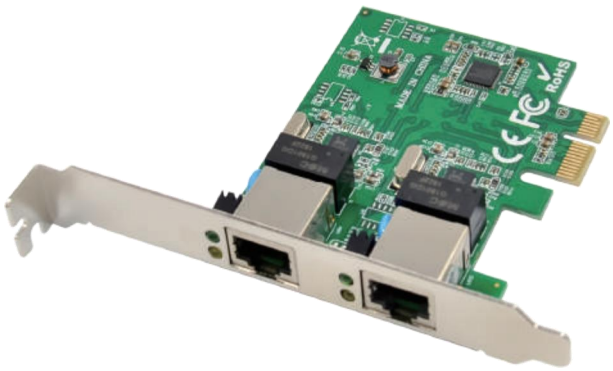

PCIe 1.1

PCIe x1 8111F Dual- 1GbE RJ45 Ethernet Network Card

Chipset: RTL8111F+ASM1182e Port Configuration: 2 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 82 x 67 mm(PCIe Board) Product weight: 48 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW71



PCIe 1.1

PCIe x1 8111F Dual- 1GbE RJ45 Ethernet Network Card

Chipset: RTL8111F+ASM1182e Port Configuration: 2 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 82 x 67 mm(PCIe Board) Product weight: 45 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW7377

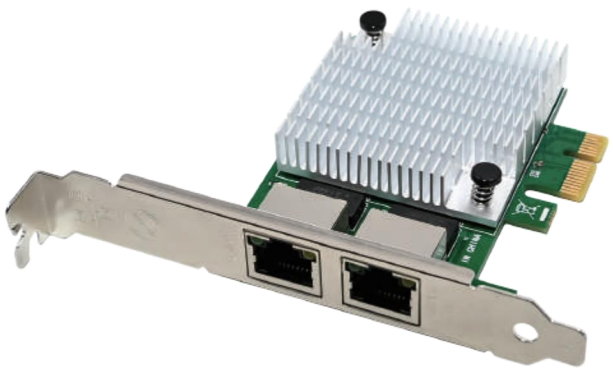

PCIe 1.1

PCIe x1 8111F Dual- 1GbE RJ45 Ethernet Network Card

Chipset: RTL8111F+ASM1187 Port Configuration: 2 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 76 x 65 mm(PCIe Board) Product weight: 72.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW70

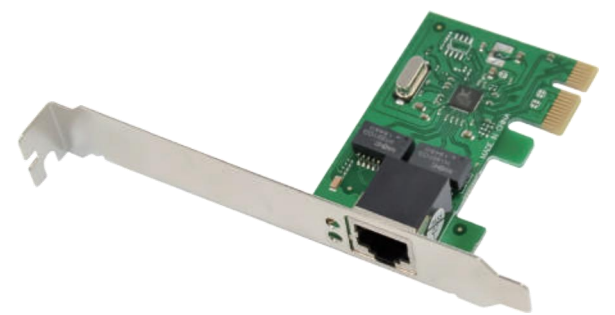

PCIe 1.1

PCIe x1 8111F Single-1GbE RJ45 Ethernet Network Card

Chipset: Realtek RTL8111F Port Configuration: 1 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 67 x 45 mm(PCIe Board) Product weight: 28.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW713



PCIe 1.1

PCIe x1 8111G Single-1GbE RJ45 Ethernet Network Card

Chipset: Realtek RTL8111G Port Configuration: 1 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 70 x 65 mm(PCIe Board) Product weight: 35.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW732

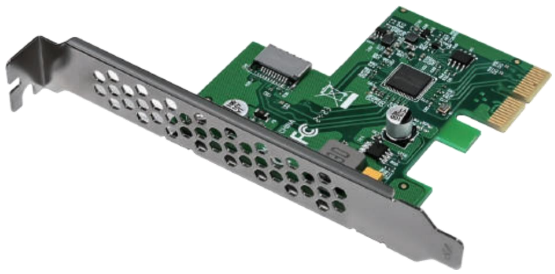

PCIe 1.1

PCIe x1 8111H Single-1GbE RJ45 Ethernet Network Card

Chipset: Realtek RTL8111H Port Configuration: 1 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 70 x 65 mm(PCIe Board) Product weight: 35.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW705

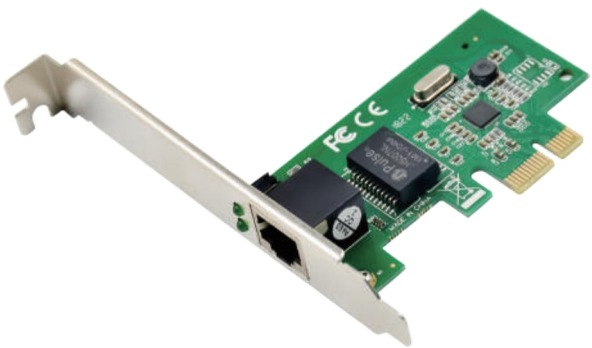

PCIe 1.1

PCIe x1 8111E Single-1GbE RJ45 Ethernet Network Card

Chipset: Realtek RTL8111E Port Configuration: 1 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 80 x 47 mm(PCIe Board) Product weight: 32.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW71



PCIe 1.1

PCIe x1 8111C Single-1GbE RJ45 Ethernet Network Card

Chipset: Realtek RTL8111C Port Configuration: 1 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 65 x 40 mm(PCIe Board) Product weight: 28.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual (OEM)

PW703
PW719



PCI Quad-Port 100M Ethernet Integrated Switch Board

Chipset: RTL8305SC+RTL8100CL Port Configuration: 4 x RJ45
Data Transfer Rate: 100/10Mbps

Dimension: 120 x 92 mm(PCIe Board) Product weight: 80 g
Accessories: 1 x AntiPWatic bag, 1 x CD-Driver, 1 x Neutral box



PCIe x1 5-Port 100M Ethernet Integrated Switch Board

Chipset: IC PLUS IP175 Port Configuration: 5 x RJ45
Data Transfer Rate: 100/10Mbps

Dimension: 72 x 105 mm(PCIe Board) Product weight: 70 g
Accessories: 1 x AntiPWatic bag, 1 x CD-Driver, 1 x Neutral box

PW70

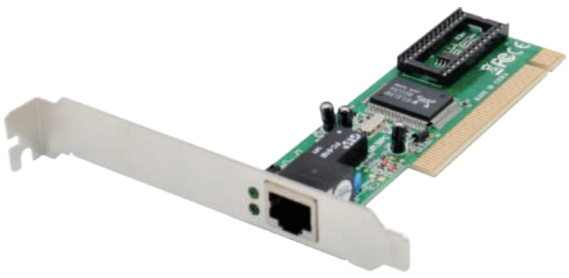

PCI 8139D Single- 100Mb RJ45 Ethernet Network Card

Chipset: Realtek RTL8139D Port Configuration: 1 x RJ45
Data Transfer Rate: 100/10Mbps

Dimension: 118 x 39 mm(PCI Board) Product weight: 43 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW702

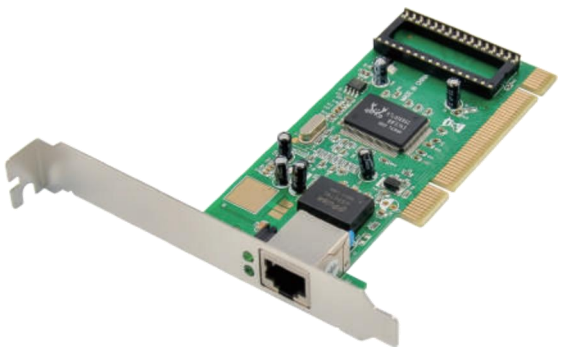

PCI 8169SC Single- 1GbE RJ45 Ethernet Network Card

Chipset: Realtek RTL8169SC Port Configuration: 1 x RJ45
Data Transfer Rate: 1000/100/10Mbps

Dimension: 118 x 58 mm(PCI Board) Product weight: 48 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW7391
PW7383



PCIe x1 82576 Single-Port Gigabit SC Fiber Server NIC

Chipset: Intel 82576EB Port Configuration: 1 x SC Fiber
Data Rate Per Port: 1GbE

Dimension: 115 x 67 mm(PCIe Board) Product weight: 75.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

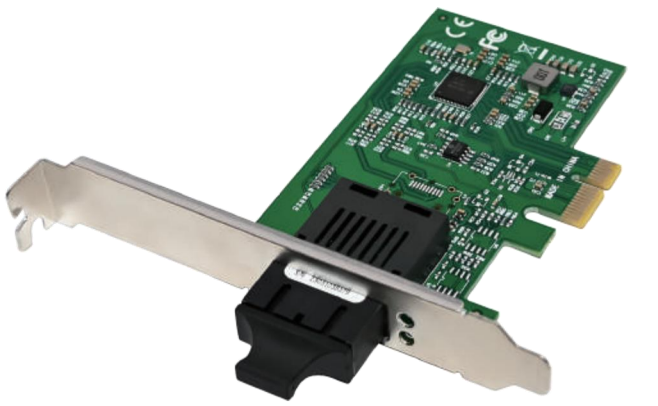

PCIe x1 I210-F1 Single-Port Gigabit SC Fiber Server NIC

Chipset: Intel I210CL Port Configuration: 1 x SC Fiber
Data Rate Per Port: 1GbE

Dimension: 96 x 62 mm(PCIe Board) Product weight: 46.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW711

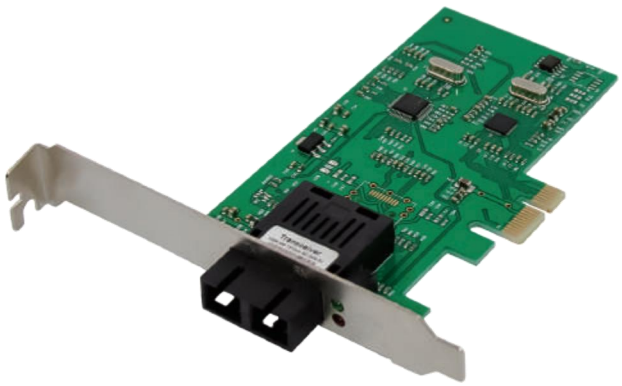

PCIe 1.1

PCIe x1 RTL8105E SC Fiber FaPW Ethernet Network

Chipset: RTL8105E + IC IP113C Port Configuration: 1 x SC Fiber
Data Transfer Rate: 10/100Mbps Auto-negotiation

Dimension: 113 x 65 mm(PCIe Board) Product weight: 49.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual(OEM)

PW731



PCIe 1.1

PCIe x1 RTL8106E SC Fiber FaPW Ethernet Network

Chipset: RTL8106E + IC IP113C Port Configuration: 1 x SC Fiber
Data Transfer Rate: 10/100Mbps Auto-negotiation

Dimension: 71 x 55 mm(PCIe Board) Product weight: 38.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual(OEM)

PW7261



PCI IP100A Single-SC Fiber FaPW Ethernet Network Card

Chipset: IC Plus IP100A LF Port Configuration: 1 x SC Fiber
Data Transfer Rate: 10/100 Mbps Auto-negotiation

Dimension: 120 x 50 mm (PCI Board) Product weight: 48.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual(OEM)



PCI RC82545EM Single- SC Fiber Ethernet Server NIC

Chipset: Intel RC82545EM Port Configuration: 1 x SC Fiber
Data Rate Per Port: 1GbE

Dimension: 119 x 53 mm (PCI Board) Product weight: 50 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x Neutral box

PW7290

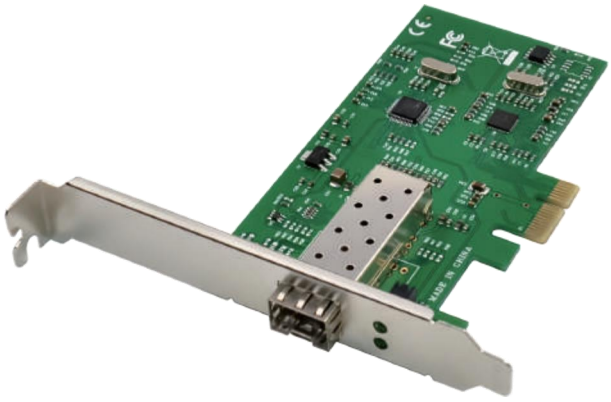

PCIe 1.1

PCIe RTL8105E Single-SFP FaPW Ethernet Network Card

Chipset: RTL8105E + IC IP113C Port Configuration: 1 x SFP
Data Transfer Rate: 10/100Mbps Auto-negotiation

Dimension: 101 x 65 mm(PCIe Board) Product weight: 46 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual(OEM)

PW7354

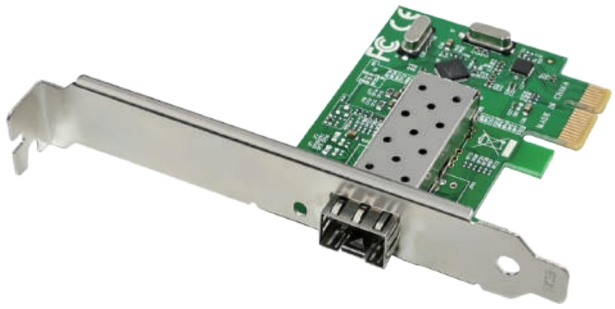

PCIe 1.1

PCIe RTL8106E Single-SFP FaPW Ethernet Network Card

Chipset: RTL8106E + IC IP113C Port Configuration: 1 x SFP
Data Transfer Rate: 10/100Mbps Auto-negotiation

Dimension: 71 x 55 mm(PCIe Board) Product weight: 36.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual(OEM)

PW7478



Data rate per port: 1Gbps M12 8-pin X-Code

PCIe x4 I350AM4 Quad-1GbE PoE+ Vision Grabber NIC

Chipset: Intel I350AM4 Port Configuration: 4 x M12 PoE+
PoE+ Power Output: 44~57VDC, 30W per port, Total Power: 120W

Dimension: 167 x 111 mm(PCIe Board) Product weight: 221 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box

PW7542



Data rate per port: 1Gbps with isolation

PCIe x4 I350AM2 Dual- 1GbE PoE+ Vision Grabber NIC

Chipset: Intel I350AM2 Port Configuration: 2 x RJ45 PoE+
PoE+ Power Output: 44~57VDC, 30W per port, Total Power: 60W

Dimension: 167 x 111 mm(PCIe Board) Product weight: g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box

PW7458



Data rate per port: 1Gbps with isolation

PCIe x4 I350AM4 Quad-1GbE PoE+ Vision Grabber NIC

Chipset: Intel I350AM4 Port Configuration: 4 x RJ45 PoE+
PoE+ Power Output: 44~57VDC, 30W per port, Total Power: 120W

Dimension: 167 x 111 mm(PCIe Board) Product weight: 188.5 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box

PW7488



Data rate per port: 1Gbps M12 8-pin X-Code

PCIe x4 I350AM2 Dual- 1GbE PoE+ Vision Grabber NIC

Chipset: Intel I350AM2 Port Configuration: 2 x M12 PoE+
PoE+ Power Output: 44~57VDC, 30W per port, Total Power: 60W

Dimension: 167 x 111 mm(PCIe Board) Product weight: g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box

PW7456



Data rate per port: 1Gbps

Surge Protection

PCIe x4 I350AM4 Quad-1GbE PoE+ Vision Grabber NIC

Chipset: Intel I350AM4 Port Configuration: 4 x RJ45 PoE+
PoE+ Power Output: 44~57VDC, 30W per port, Total Power: 120W

Dimension: 160 x 69 mm(PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual

PW7457



Data rate per port: 1Gbps

Built-in Filter

PCIe x4 I350AM4 Quad-1GbE PoE+ Vision Grabber NIC

Chipset: Intel I350AM4 Port Configuration: 4 x RJ45 PoE+
PoE+ Power Output: 44~57VDC, 30W per port, Total Power: 120W

Dimension: 157 x 103 mm(PCIe Board) Product weight: 174 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box

PW7246



Data rate per port: 1Gbps

PCIe x4 I350AM4 Quad-1GbE PoE+ Vision Grabber NIC

Chipset: Intel I350AM4 Port Configuration: 4 x RJ45 PoE+
PoE+ Power Output: 44~57VDC, 30W per port, Total Power: 120W

Dimension: 160 x 69 mm(PCIe Board) Product weight: 130 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual

PW7283



Data rate per port: 1Gbps

PCIe x4 I350AM2 Dual- 1GbE PoE+ Vision Grabber NIC

Chipset: Intel I350AM2 Port Configuration: 2 x RJ45 PoE+
PoE+ Power Output: 44~57VDC, 30W per port, Total Power: 60W

Dimension: 160 x 69 mm(PCIe Board) Product weight: 171.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual

PW7483



Data rate per port: 2.5Gbps

PCIe x4 I226-T4 Quad- 2.5GbE PoE Vision Grabber NIC

Chipset: Intel I226 + Port Configuration: 4 x RJ45 PoE
PoE Power Output: 44~57VDC, 30W per port, Total Power: 120W

Dimension: 140 x 103 mm(PCIe Board) Product weight: 138.3 g
Accessories: 1 x User's Manual, 1 x CD-Driver, 1 x Neutral box

PW7482



Data rate per port: 2.5Gbps

PCIe x4 I226-T2 Dual- 2.5GbE PoE Vision Grabber NIC

Chipset: Intel I226 + Port Configuration: 2 x RJ45 PoE
PoE Power Output: 44~57VDC, 30W per port, Total Power: 60W

Dimension: 140 x 75 mm(PCIe Board) Product weight: 109.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual

PW7481

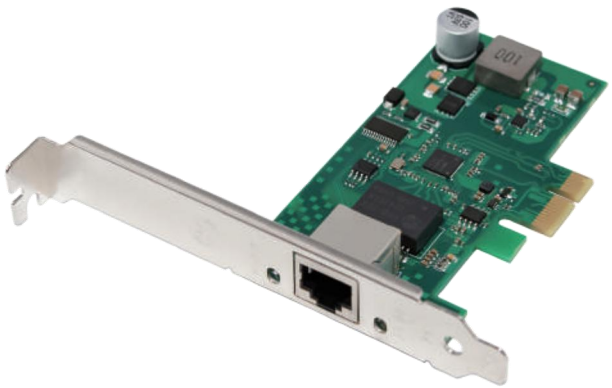

Data rate per port: 2.5Gbps

PCIe x1 I226-T1 Single- 2.5GbE PoE Vision Grabber NIC

Chipset: Intel I226 Port Configuration: 1 x RJ45 PoE
PoE Power Output: 44~57VDC, 30W per port, Total Power: 30W

Dimension: 97 x 55 mm(PCIe Board) Product weight: 58.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual

PW7225



Data rate per port: 1Gbps

PCIe x1 I210-T1 Single- 1GbE PoE Vision Grabber NIC

Chipset: Intel I210AT Port Configuration: 1 x RJ45 PoE
PoE Power Output: 44~57VDC, 30W per port, Total Power: 30W

Dimension: 115 x 69 mm(PCIe Board) Product weight: 80.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual

PW7298



Data rate per port: 10Gbps

PCIe x4 X550-T2 Dual- 10GbE PoE Vision Grabber NIC

Chipset: Intel X550-AT2 Port Configuration: 2 x RJ45 PoE
PoE Power Output: 44~57VDC, 30W per port, Total Power: 60W

Dimension: 156 x 68 mm(PCIe Board) Product weight: 173.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual

PW7335



Data rate per port: 10Gbps

PCIe x8 X540-T2 Dual- 10GbE PoE Vision Grabber NIC

Chipset: Intel X540-AT2 Port Configuration: 2 x RJ45 PoE
PoE Power Output: 44~57VDC, 30W per port, Total Power: 60W

Dimension: 156 x 68 mm(PCIe Board) Product weight: 178.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual

PW7474

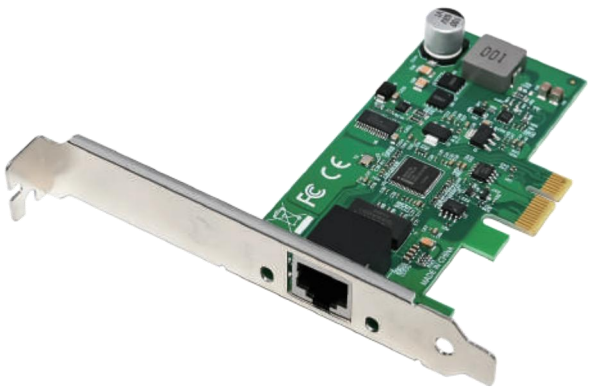

Data rate per port: 1Gbps

PCIe x1 82574L Single-Port 1G PoE Vision Grabber NIC

Chipset: Intel 82574L Port Configuration: 1 x RJ45 PoE
PoE Power Output: 44~57VDC, 30W per port, Total Power: 30W

Dimension: 97 x 55 mm(PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual

PW7231



Data rate per port: 1Gbps

PCIe x4 82576EB Dual-Port 1G PoE Vision Grabber NIC

Chipset: Intel 82576EB Port Configuration: 2 x RJ45 PoE
PoE Power Output: 44~57VDC, 30W per port, Total Power: 60W

Dimension: 160 x 69 mm(PCIe Board) Product weight: 165.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual

P

Product Updates
PWay tuned

Data rate per port: 1Gbps

PCIe x4 I350AM4 Eight-1GbE PoE+ Vision Grabber NIC

Chipset: Intel I350AM4 Port Configuration: 8 x RJ45 PoE+
PoE+ Power Output: 44~57VDC, 30W per port, Total Power: 240W

Dimension: x mm(PCIe Board) Product weight: g
Accessories: 1 x CD-Driver, 1 x Neutral box, 1 x User's Manual

PW

Product Updates
PWay tuned

Data rate per port: 1Gbps

PCIe x4 I210-T4 Quad- 1GbE PoE Vision Grabber NIC

Chipset: Intel I210AT+ Port Configuration: 4 x RJ45 PoE
PoE Power Output: 44~57VDC, 30W per port, Total Power: 120W

Dimension: x mm(PCIe Board) Product weight: g
Accessories: 1 x CD-Driver, 1 x Neutral box, 1 x User's Manual

P

Product Updates
PWay tuned

Data rate per port: 1Gbps

PCIe x4 I210T2 Dual-Port 1GbE PoE Vision Grabber NIC

Chipset: Intel I210AT+ Port Configuration: 2 x RJ45 PoE
PoE Power Output: 44~57VDC, 30W per port, Total Power: 60W

Dimension: x mm(PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual

PW

Product Updates
PWay tuned

Data rate per port: 1Gbps

PCIe x4 I210T4 Quad-Port 1GbE PoE Vision Grabber NIC

Chipset: Intel I210AT+ Port Configuration: 4 x RJ45 PoE
PoE Power Output: 44~57VDC, 30W per port, Total Power: 120W

Dimension: x mm(PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x User's Manual

PW7388



PCIe 4.0 RDMA

OCP3.0 E810-CQDA2 Dual-100GbE QSFP28 Server NIC

Chipset: Intel E810-CAM2 Port Configuration: 2 x QSFP28
Data Rate Per Port: 100/50/25/10GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: 117 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7389



PCIe 4.0 RDMA

OCP3.0 E810CQDA1 Single-100GbE QSFP28 Server NIC

Chipset: Intel E810-CAM1 Port Configuration: 1 x QSFP28
Data Rate Per Port: 100/50/25/10GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: 105.2 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7400



PCIe 4.0 RDMA

OCP3.0 E810-XXVDA2 Dual- 25GbE SFP28 Server NIC

Chipset: Intel E810XXVAM2 Port Configuration: 2 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: 105.7 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7394



PCIe 4.0 RDMA

OCP3.0 E810-XXVDA4 Quad-25GbE SFP28 Server NIC

Chipset: Intel E810-CAM1 Port Configuration: 4 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: 116.5 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7566

Product Updates
PWay tuned

PCIe 5.0

PW7430



PCIe 3.0

OCP3.0 BCM57608 Single 400GbE QSFP112 Server NIC

Chipset: Broadcom BCM57608 Port Configuration: 2 x QSFP112
Data Rate Per Port: 400/200/100/50/25GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

OCP3.0 QL41xx Quad- 10G SFP+ Converged Server NIC

Chipset: Marvell QLogic QL41xx Port Configuration: 4 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: 107.1 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW735



PCIe 3.0

PW7431



PCIe 3.0

OCP3.0 X710-DA2 Dual- 10GbE SFP+ Fiber Server NIC

Chipset: Intel X710-BM2 Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: 101 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

OCP3.0 X710-DA4 Quad- 10GbE SFP+ Fiber Server NIC

Chipset: Intel XL710-BM1 Port Configuration: 4 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: 112.8 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7555
PW7432



OCP3.0 I350AM2 Dual-Port 1GbE SFP Fiber Server NIC

Chipset: Intel I350AM2 Port Configuration: 2 x SFP
Data Rate Per Port: 1GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: 96.2 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack



OCP3.0 I350AM4 Quad-Port 1GbE SFP Fiber Server NIC

Chipset: Intel I350AM4 Port Configuration: 4 x SFP
Data Rate Per Port: 1GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: 116 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW739



PCIe 2.0

OCP 3.0 X520-DA2 Dual- 10GbE SFP+ Fiber Server NIC

Chipset: Intel 82599ES Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: 102.4 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7429

Product Updates
PWay tuned

PCIe 3.0

OCP 3.0 XL710-QDA2 Dual- 40GbE QSFP+ Server NIC

Chipset: Intel XL710-BM2 Port Configuration: 2 x QSFP+
Data Rate Per Port: 40/10GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7427



PCIe 3.0 RDMA

OCP 3.0 ConnectX-4 LX Dual- 25GbE SFP28 Server NIC

Chipset: MCX4121A-ACAT Port Configuration: 2 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: 106.1 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7549



PCIe 3.0 RDMA

OCP 3.0 ConnectX-4 LX Dual- 25GbE SFP28 Server NIC

Chipset: MCX4121A-ACAT Port Configuration: 2 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: 101.9 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7435



PCIe 3.0 RDMA

OCP 3.0 ConnectX-4 LX Dual- 10GbE SFP+ Server NIC

Chipset: MCX4121A-XCAT Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: 101.4 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7550



PCIe 3.0 RDMA

OCP 3.0 ConnectX-4 LX Dual- 10GbE SFP+ Server NIC

Chipset: MCX4121A-XCAT Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: 101.9 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7556

Product Updates
PWay tuned

PCIe 4.0

PW755



PCIe 4.0

OCP3.0 E610XT4 4x10GbE RJ45 Converged Server NIC

Chipset: Intel E610-XAT2 Port Configuration: 4 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 115 x 76 mm(Form Factor) Product weight: g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

OCP3.0 E610XT2 2x10GbE RJ45 Converged Server NIC

Chipset: Intel E610-XAT2 Port Configuration: 2 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 115 x 76 mm(Form Factor) Product weight: 100.3 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7398



PCIe 2.1

PW739



PCIe 3.0

OCP3.0 X540T2 Dual-10GbE RJ45 Ethernet Server NIC

Chipset: Intel X540-AT2 Port Configuration: 2 x RJ45
Data Rate Per Port: 10G/1G/100Mbps

Dimension: 115 x 76 mm(Form Factor) Product weight: 99.3 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

OCP3.0 X550T2 Dual-10GbE RJ45 Ethernet Server NIC

Chipset: Intel X550-AT2 Port Configuration: 2 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 115 x 76 mm(Form Factor) Product weight: 99.3 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7428



PCIe 3.0

OCP3.0 X710T2L 2x10GbE RJ45 Converged Server NIC

Chipset: Intel X710-AT2 Port Configuration: 2 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 115 x 76 mm(Form Factor) Product weight: 103.6 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW

Product Updates
PWay tuned

PCIe 3.0

OCP3.0 X710-T4 4x10GbE RJ45 Converged Server NIC

Chipset: Intel XL710-BM1 + X557 Port Configuration: 4 x RJ45
Data Rate Per Port: 10G/1G/100Mbps

Dimension: 115 x 76 mm(Form Factor) Product weight: g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7396



PCIe 2.1

OCP3.0 I350-T2 Dual- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I350AM2 Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 115 x 76 mm(Form Factor) Product weight: 98 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7397



PCIe 2.1

OCP3.0 I350-T4 Quad- 1GbE RJ45 Ethernet Server NIC

Chipset: Intel I350AM4 Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 115 x 76 mm(Form Factor) Product weight: 101.8 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7402
PW7403



OCP3.0 BCM5720 Quad-1Gb RJ45 Ethernet Server NIC

Chipset: Broadcom BCM5720 Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 115 x 76 mm(Form Factor) Product weight: 104.1 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack



OCP3.0 BCM5719 Quad-1Gb RJ45 Ethernet Server NIC

Chipset: Broadcom BCM5719 Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 115 x 76 mm(Form Factor) Product weight: 103 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW751



PCIe 2.1

OCP3.0 BCM5720 Dual-1Gb RJ45 Ethernet Server NIC

Chipset: Broadcom BCM5720 Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 115 x 76 mm(Form Factor) Product weight: 95.3 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW

Product Updates
PWay tuned

PCIe 2.1

OCP3.0 BCM57302 Dual- 10GbE SFP+ Fiber Server NIC

Chipset: Broadcom BCM57302 Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: 101.8 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7345



PCIe 3.0 RDMA

OCP2.0 ConnectX-4 Single- 25GbE SFP28 Server NIC

Chipset: MCX4121A-ACAT Port Configuration: 1 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 110 x 68 mm(Form Factor) Product weight: 51.5 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW734



PCIe 3.0 RDMA

OCP2.0 ConnectX-4 LX Dual- 25GbE SFP28 Server NIC

Chipset: MCX4121A-ACAT Port Configuration: 2 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 110 x 68 mm(Form Factor) Product weight: 53.6 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW734



PCIe 4.0 RDMA

OCP2.0 ConnectX-3 Dual-Port 10GbE SFP+ Server NIC

Chipset: Mellanox MCX312A Port Configuration: 2 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 110 x 68 mm(Form Factor) Product weight: 56 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7348



PCIe 4.0 RDMA

OCP2.0 ConnectX-4 Single-50GbE QSFP28 Server NIC

Chipset: MCX4131A-GCAT Port Configuration: 1 x QSFP28
Data Rate Per Port: 50/40/25/10/1GbE

Dimension: 110 x 68 mm(Form Factor) Product weight: 57.6 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW734



PCIe 3.0 RDMA

OCP2.0 ConnectX-3 Dual-40G QSFP+ Fiber Server NIC

Chipset: Mellanox MCX314A-BCCT Port Configuration: 2 x QSFP+
Data Rate Per Port: 40/10/1GbE

Dimension: 110 x 68 mm(Form Factor) Product weight: 62.5 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW7344



PCIe 3.0 RDMA

OCP2.0 ConnectX-3 Dual-10GbE SFP+ Fiber Server NIC

Chipset: Mellanox MCX311A Port Configuration: 1 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 110 x 68 mm(Form Factor) Product weight: 53.8 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

P

Product Updates
PWay tuned

PCIe 3.0

OCP3.0 BCM57412 Dual-25GbE SFP28 Fiber Server NIC

Chipset: Broadcom BCM57412 Port Configuration: 2 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: 101 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW

Product Updates
PWay tuned

PCIe 3.0

OCP3.0 BCM57414 Dual-25GbE SFP28 Fiber Server NIC

Chipset: Broadcom BCM57414 Port Configuration: 2 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 115 x 76 mm(Form Factor) Product weight: 112.8 g
Accessories: 1 x CD-Driver, 1 x User's Manual, 1 x Neutral box
1 x Anti-PWatic BliPWer Pack

PW750



SFP+ Board: 130 x 68/55 mm

SAS V2.0

M.2 X520-DA1 Single-10GbE SFP+ InduPWrial Server

Chipset: Intel 82599EN
Port Configuration: 1 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 22 x 80 mm(M.2 Board)
Product weight: 104.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x SAS cable: Approx. 42CM, 1 x Neutral box

PW7573

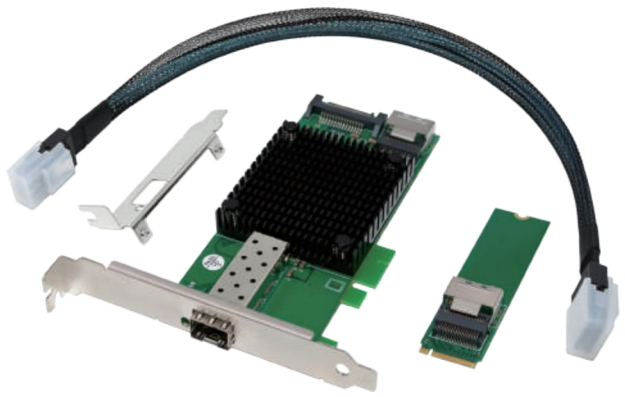

SFP28 Board: 130 x 68/55 mm

SAS

M.2 M CX-4 Single- 25GbE SFP28 InduPWrial Server NIC

Chipset: Mellanox ConnectX-4 LX
Port Configuration: 1 x SFP28
Data Rate Per Port: 25/10/1GbE

Dimension: 22 x 80 mm(M.2 Board)
Product weight: 103.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual

PW743

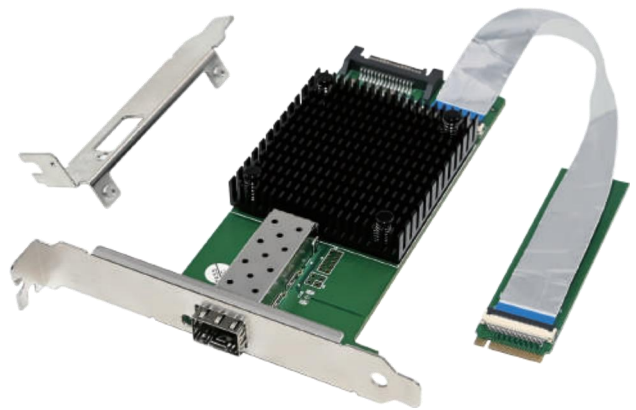

SFP+ Board: 130 x 55 mm

FPC

M.2 X520-DA1 Single-10GbE SFP+ InduPWrial Server

Chipset: Intel 82599EN
Port Configuration: 1 x SFP+
Data Rate Per Port: 10/1GbE

Dimension: 22 x 80 mm(M.2 Board)
Product weight: 98.9 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x FPC cable: Approx. 20CM, 1 x Neutral box

PW7467

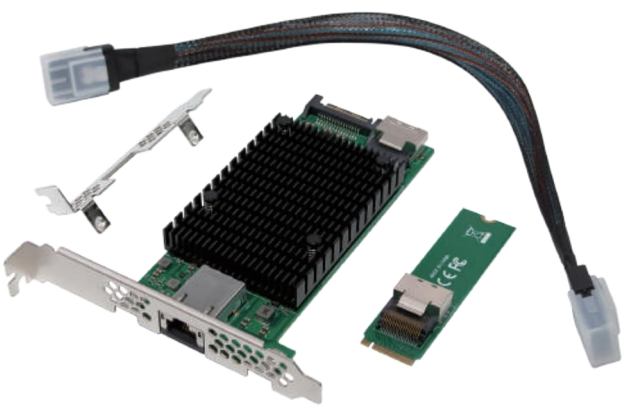

RJ45 Board: 130 x 55 mm

SAS

M.2 X520-T1 Single-10GbE RJ45 InduPWrial Server

Chipset: Intel 82599EN
Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/1GbE/100Mbps

Dimension: 22 x 80 mm(M.2 Board)
Product weight: 122.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x SAS cable: Approx. 42CM, 1 x Neutral box

PW7528



RJ45 Board: L45 x W30 x H15 mm

M.2 B+M I226 Dual- 2.5GbE RJ45 InduPWrial Server

Chipset: Intel I226 + Port Configuration: 2 x RJ45
Data Rate Per Port: 2.5G/1GbE/100M/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 50 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 12-pin Network cable: Approx. 30CM, 1 x Neutral box

PW7465



RJ45 Board: L45 x W30 x H15 mm

M.2 B+M I226 Dual- 2.5GbE RJ45 InduPWrial Server NIC

Chipset: Intel I226 + Port Configuration: 2 x RJ45
Data Rate Per Port: 2.5G/1GbE/100M/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 68 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 12-pin Network cable: Approx. 30CM, 1 x Neutral box

PW736



RJ45 Board: L45 x W30 x H15 mm

MiniPCIE I225 Dual- 2.5GbE RJ45 InduPWrial Server

Chipset: Intel I225 + Port Configuration: 2 x RJ45
Data Rate Per Port: 2.5G/1GbE/100M/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 15 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 12-pin Network cable: Approx. 30CM, 1 x Neutral box

PW7361



RJ45 Board: L33 x W30 x H15 mm

MiniPCIE I225 Dual- 2.5GbE RJ45 InduPWrial Server

Chipset: Intel I225 + Port Configuration: 2 x RJ45
Data Rate Per Port: 2.5G/1GbE/100M/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 15 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 12-pin Network cable: Approx. 30CM, 1 x Neutral box

PW7304



RJ45 Port: L35 x W21 x H22 mm

M.2 B+M I225 Single-2.5GbE RJ45 InduPWrial Server NIC

Chipset: Intel I225 Port Configuration: 1 x RJ45
Data Rate Per Port: 2.5G/1GbE/100M/10Mbps

Dimension: 22 x 42 mm(M.2 Board) Product weight: 32 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual

PW730



RJ45 Board: L25 x W38 x H15 mm

M.2 B+M I225 Single-2.5GbE RJ45 InduPWrial Server

Chipset: Intel I225 Port Configuration: 1 x RJ45
Data Rate Per Port: 2.5G/1GbE/100M/10Mbps

Dimension: 22 x 42 mm(M.2 Board) Product weight: 40.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 4-pin/10-pin Cable: Approx. 26.5CM, 1 x Neutral box

PW7366



RJ45 Board: L45 x W30 x H15 mm

M.2 B+M I225 Single-2.5GbE RJ45 InduPWrial Server NIC

Chipset: Intel I225 Port Configuration: 1 x RJ45
Data Rate Per Port: 2.5G/1GbE/100M/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 4.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 12-pin Network cable: Approx. 20CM, 1 x Neutral box

PW7365

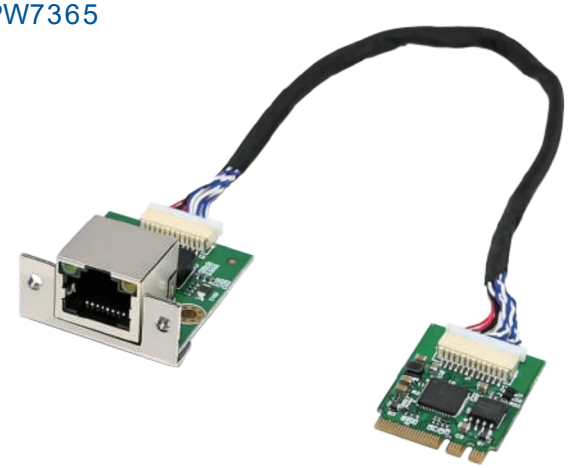

RJ45 Board: L33 x W30 x H15 mm

M.2 A+E I225 Single-2.5GbE RJ45 InduPWrial Server NIC

Chipset: Intel I225 Port Configuration: 1 x RJ45
Data Rate Per Port: 2.5G/1GbE/100M/10Mbps

Dimension: 22 x 30 mm(M.2 Board) Product weight: 2.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 12-pin Network cable: Approx. 20CM, 1 x Neutral box

PW735

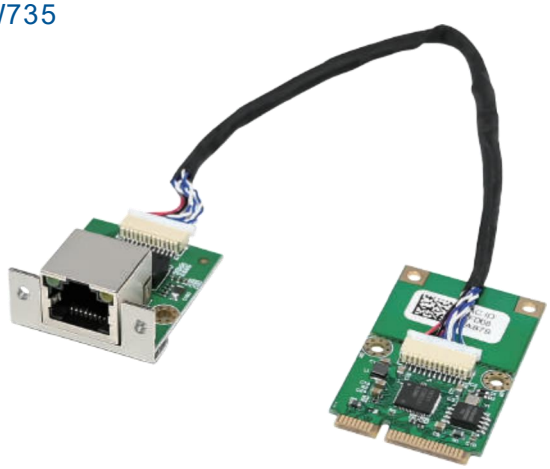

RJ45 Board: L33 x W30 x H15 mm

MiniPCIE I225 Single-2.5GbE RJ45 InduPWrial Server NIC

Chipset: Intel I225 Port Configuration: 1 x RJ45
Data Rate Per Port: 2.5G/1GbE/100M/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 4.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 10-pin Network cable: Approx. 20.8CM, 1 x Neutral box

PW7254



RJ45 Port: L35 x W21 x H22 mm

MiniPCIE I210 Single- 1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I210AT Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 36 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual

PW7301



RJ45 Port: L35 x W21 x H22 mm

M.2 B+M I210 Single- 1GbE RJ45 InduPWrial Server

Chipset: Intel I210AT Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 42 mm(M.2 Board) Product weight: 16.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 8-pin Network cable: Approx. 26.5CM, 1 x Neutral box

PW730



RJ45 Board: L63 x W25 x H15 mm

M.2 B+M I210 Single- 1GbE RJ45 InduPWrial Server

Chipset: Intel I210AT Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 42 mm(M.2 Board) Product weight: 94.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 10-pin/4-pin Cable: Approx. 26.5CM, 1 x Neutral box

PW7302



RJ45 Port: L35 x W21 x H22 mm

MiniPCIE I210-T2 Dual-1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I210AT + Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 36 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 8-pin Network cable: Approx. 30.5CM, 1 x Neutral box

PW733



RJ45 Board: L45 x W30 x H15 mm

M.2 B+M I210-T2 Dual-1GbE RJ45 InduPWrial Server

Chipset: Intel I210AT + Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 68 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 12-pin Network cable: Approx. 30CM, 1 x Neutral box

PW7362



RJ45 Board: L45 x W30 x H15 mm

MiniPCIE I210-T2 Dual-1GbE RJ45 InduPWrial Server

Chipset: Intel I210AT + Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 15.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 12-pin Network cable: Approx. 30CM, 1 x Neutral box

PW736



RJ45 Board: L33 x W30 x H15 mm

MiniPCIE I210-T2 Dual-1GbE RJ45 InduPWrial Server

Chipset: Intel I210AT + Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 15.1 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 12-pin Network cable: Approx. 30CM, 1 x Neutral box

PW7320



RJ45 Board: L45 x W30 x H15 mm

M.2 B+M I211-T2 Dual-1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I211AT + Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 68 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 12-pin Network cable: Approx. 31CM, 1 x Neutral box

PW7451



RJ45 Port: L35 x W21 x H22 mm

MiniPCIE I211-T2 Dual-1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I211AT + Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 36 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 8-pin Network cable: Approx. 30.5CM, 1 x Neutral box

PW7544



RJ45 Board: L45 x W30 x H15 mm

M.2 B+M I210-T2 Dual-1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I210AT + Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 50 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 12-pin Network cable: Approx. 30CM, 1 x Neutral box

PW7529



RJ45 Board: L33 x W30 x H15 mm

M.2 B+M I211-T2 Dual-1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I211AT + Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 50 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 12-pin Network cable: Approx. 31CM, 1 x Neutral box

PW7241



SFP Board: 52 x 63 mm

PW745



SFP Board: 50 x 30 mm FPC

MiniPCIE I210-F1 Single-1GbE SFP InduPWrial Server NIC

Chipset: Intel I210CS Port Configuration: 1 x SFP
Data Rate Per Port: 1GbE

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 50 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 10-pin cable: 26.5CM, 1 x SATA cable, 1 x Neutral box

M.2 A+E I210-F1 Single-1GbE SFP InduPWrial Server NIC

Chipset: Intel I210CL Port Configuration: 1 x SFP
Data Rate Per Port: 1GbE

Dimension: 22 x 30 mm(M.2 Board) Product weight: 17.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x FPC Network cable: Approx. 20CM, 1 x Neutral box

PW7494

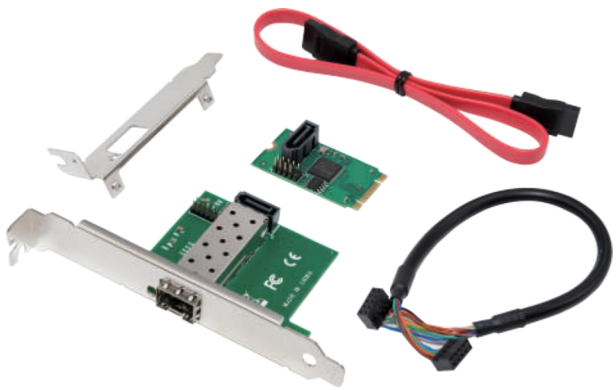

SFP Board: 52 x 63 mm

PW7497

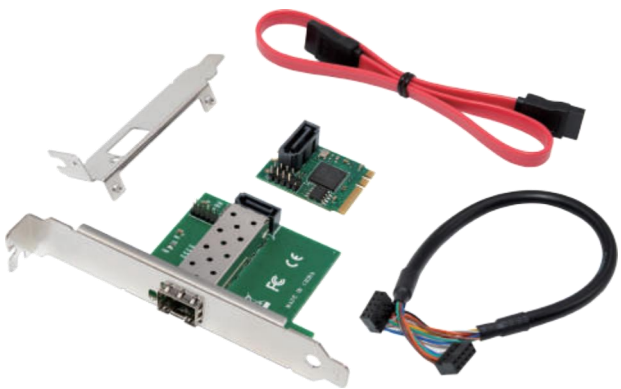

SFP Board: 52 x 63 mm

M.2 B+M I210-F1 Single-1GbE SFP InduPWrial Server NIC

Chipset: Intel I210CS Port Configuration: 1 x SFP
Data Rate Per Port: 1GbE

Dimension: 22 x 42 mm(M.2 Board) Product weight: 98 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 10-pin cable: 26.5CM, 1 x SATA cable, 1 x Neutral box

Chipset: Intel I210CS Port Configuration: 1 x SFP
Data Rate Per Port: 1GbE

Dimension: 22 x 42 mm(M.2 Board) Product weight: 98 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 10-pin cable: 26.5CM, 1 x SATA cable, 1 x Neutral box

PW7248



RJ45 Board: L25 x W38 x H15 mm

M.2 A+E I210T1 Single-1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I210AT
Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 30 mm(M.2 Board)
Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 16-pin Network cable: 18CM, 1 x Neutral box

PW7249



SFP Board: 52 x 63 mm

FPC

M.2 A+E I210-F1 Single-1GbE SFP InduPWrial Server NIC

Chipset: Intel I210CS
Port Configuration: 1 x SFP
Data Rate Per Port: 1GbE

Dimension: 22 x 30 mm(M.2 Board)
Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 16-pin Network cable: 18CM, 1 x Neutral box

PW7273



SFP Board: 50 x 30 mm

M.2 A+E I210-F1 Single-1GbE SFP InduPWrial Server NIC

Chipset: Intel I210CS
Port Configuration: 1 x SFP
Data Rate Per Port: 1GbE

Dimension: 22 x 30 mm(M.2 Board)
Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 16-pin Network cable: 18CM, 1 x Neutral box

PW7274



RJ45 Board: L30 x W33 x H15 mm

M.2 A+E I210T1 Single-1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I210AT
Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 30 mm(M.2 Board)
Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 16-pin Network cable: 18CM, 1 x Neutral box

PW7332



SFP Board: 52 x 30 mm

FPC

M.2 B+M I210-F1 Single-1GbE SFP InduPWrial Server NIC

Chipset: Intel I210CS
Port Configuration: 1 x SFP
Data Rate Per Port: 1GbE

Dimension: 22 x 42 mm(M.2 Board)
Product weight: 18 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x FPC Network cable: 20CM, 1 x Neutral box

PW7527



SFP Board: 52 x 63 mm

M.2 B+M I210-T2 Dual-1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I210AT +
Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 80 mm(M.2 Board)
Product weight: 50 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 12-pin Network cable: Approx. 30CM, 1 x Neutral box

PW7543



RJ45 Board: L30 x W33 x H15 mm

IDC

MiniPCIE I350-T2 Dual 1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I350AM2
Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board)
Product weight: 36.3 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 14-pin Network cable: Approx. 30CM, 1 x Neutral box

PW7423



RJ45 Board: 52 x 63 mm

FPC

MiniPCIE I350-T4 Quad 1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I350AM4
Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board)
Product weight: 69.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x FPC Network cable: Approx. 20CM, 1 x Neutral box

PW7332



SFP Board: 52 x 30 mm

FPC

PW7527



SFP Board: 52 x 63 mm

M.2 B+M I210-F1 Single-1GbE SFP InduPWrial Server NIC

Chipset: Intel I210CS
Port Configuration: 1 x SFP
Data Rate Per Port: 1GbE

Dimension: 22 x 42 mm(M.2 Board)
Product weight: 18 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x FPC Network cable: Approx. 20CM, 1 x Neutral box

M.2 B+M I210-T2 Dual-1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I210AT +
Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 80 mm(M.2 Board)
Product weight: 50 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 12-pin Network cable: Approx. 30CM, 1 x Neutral box

PW7535



RJ45 Port: L35 x W21 x H22 mm

IDC

PW7423



RJ45 Board: 52 x 63 mm

FPC

M.2 B+M I350-T2 Dual 1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I350AM2
Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 80 mm(M.2 Board)
Product weight: 15.3 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 8-pin Network cable: Approx. 30CM, 1 x Neutral box

MiniPCIE I350-T4 Quad 1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I350AM4
Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board)
Product weight: 69.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x FPC Network cable: Approx. 20CM, 1 x Neutral box

PW7543



RJ45 Board: L30 x W33 x H15 mm IDC

MiniPCIE I350-T2 Dual 1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I350AM2 Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 36.3 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 14-pin Network cable: Approx. 30CM, 1 x Neutral box

PW7537



RJ45 Board: L30 x W33 x H15 mm IDC

MiniPCIE I350-T4 Quad 1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I350AM4 Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 61.5 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
4 x 14-pin Network cable: Approx. 30CM, 1 x Neutral box

PW7539



RJ45 Board: L30 x W33 x H15 mm IDC

M.2 B+M I350-T2 Dual 1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I350AM2 Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 37.5 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 14-pin Network cable: Approx. 30CM, 1 x Neutral box

PW7536



RJ45 Board: L30 x W33 x H15 mm IDC

M.2 B+M I350-T4 Quad 1GbE RJ45 InduPWrial Server NIC

Chipset: Intel I350AM4 Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 62.7 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
4 x 14-pin Network cable: Approx. 30CM, 1 x Neutral box

PW724



RJ45 Board: 41 x 63 mm SAS

MiniPCIE I350-T2 Dual 1GbE RJ45 InduPWrial Server

Chipset: Intel I350AM2 Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 70 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x SAS Network cable: Approx. 30.5CM, 1 x Neutral box

PW7243



SFP Board: 72 x 63 mm SAS

MiniPCIE I350-F2 Dual- 1GbE SFP InduPWrial Server NIC

Chipset: Intel I350AM2 Port Configuration: 2 x SFP
Data Rate Per Port: 1GbE

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 80 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x SAS Network cable: Approx. 30.5CM, 1 x Neutral box

PW730



RJ45 Port: L35 x W21 x H22 mm

MiniPCIE I350-T2 Dual 1GbE RJ45 InduPWrial Server

Chipset: Intel I350AM2 Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 15.8 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 8-pin Network cable: Approx. 30CM, 1 x Neutral box

PW7521

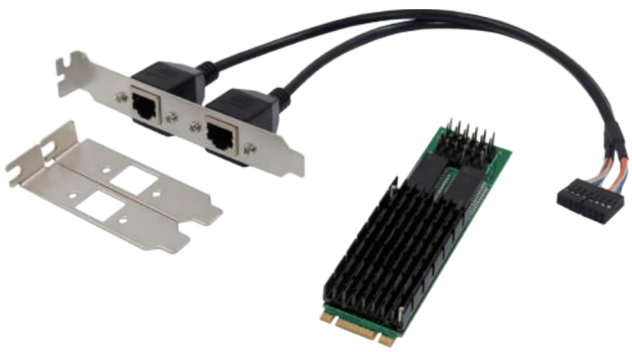

RJ45 Port: L35 x W21 x H22 mm

Chipset: Intel WG82583V + Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 15.6 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 12-pin Network cable: Approx. 30CM, 1 x Neutral box

PW7251

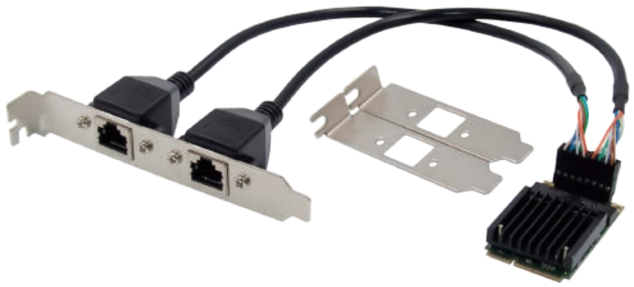

RJ45 Port: L35 x W21 x H22 mm

MiniPCIE 82583V Dual 1GbE RJ45 InduPWrial Server NIC

Chipset: Intel WG82583V + Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 86.5 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual

PW724



RJ45 Port: L35 x W21 x H22 mm

MiniPCIE 82583V Dual 1GbE RJ45 InduPWrial Server

Chipset: Intel WG82583V + Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 86.5 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 10-pin Network cable: Approx. 30.5CM, 1 x Neutral box

PW7553



RJ45 Port: L35 x W21 x H22 mm

M.2 B+M 82574L Single- 1G RJ45 InduPWrial Server NIC

Chipset: Intel WG82574L Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 58.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 10-pin Network cable: Approx. 30CM, 1 x Neutral box

PW7554



RJ45 Board: L28 x W32 x H15 mm

M.2 B+M 82574L Single- 1G RJ45 InduPWrial Server NIC

Chipset: Intel WG82574L Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 15.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x FPC Network cable: Approx. 30CM, 1 x Neutral box

PW7226

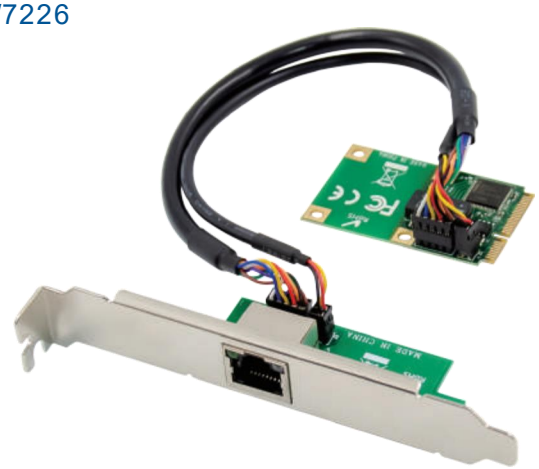

RJ45 Board: 25 x 63 mm

MiniPCIE 82574L Single- 1G RJ45 InduPWrial Server

Chipset: Intel WG82574L Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x 10-pin/4-pin Cable: 30.5CM, 1 x Neutral box

PW723

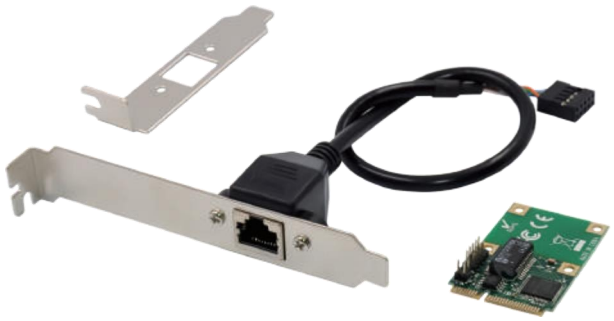

RJ45 Port: L35 x W21 x H22 mm

MiniPCIE 82574L Single- 1G RJ45 InduPWrial Server NIC

Chipset: Intel WG82574L Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual

PW752

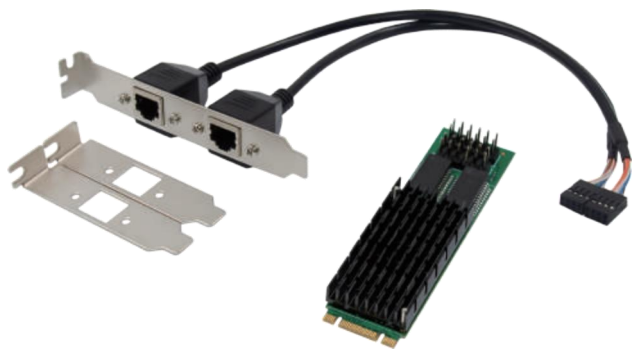

RJ45 Port: L35 x W21 x H22 mm

M.2 B+M 82574L Dual-1GbE RJ45 InduPWrial Server

Chipset: Intel WG82574L + Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 15.6 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
2 x 12-pin Network cable: 30CM, 1 x Neutral box

PW7534



RJ45 Board: L38 x W60 x H15 mm

Low power consumption

M.2 B+MAQC113C 10G mGig RJ45 Ethernet Server NIC

Chipset: Marvell AQC113C Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 48 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x FPC Network cable: 20CM, 1 x Neutral box

PW7515

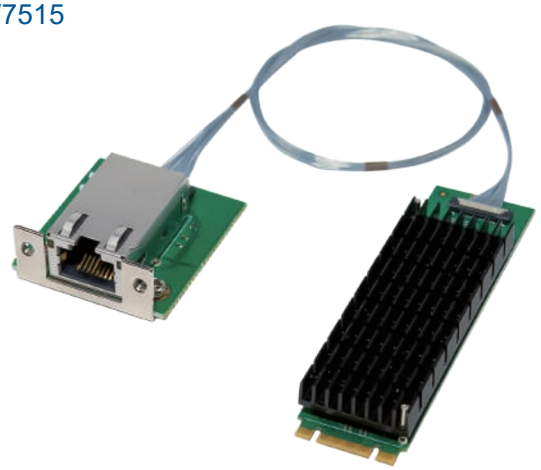

RJ45 Board: 38 x 35 mm

M.2 B+MAQC107S 10G mGig RJ45 Ethernet Server NIC

Chipset: Marvell AQC107S Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 32 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x High-precision Network cable: Approx. 30CM, 1 x Neutral box

PW7516



RJ45 Board: 38 x 60 mm

M.2 B+MAQC107S 10G mGig RJ45 Ethernet Server NIC

Chipset: Marvell AQC107S Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 48 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x High-precision Network cable: Approx. 30CM, 1 x Neutral box

PW7517



RJ45 Board: 38 x 35 mm

M.2 B+MAQC113 10G mGig RJ45 Ethernet Server NIC

Chipset: Marvell AQC113 Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 32 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x High-precision Network cable: Approx. 30CM, 1 x Neutral box

PW7518

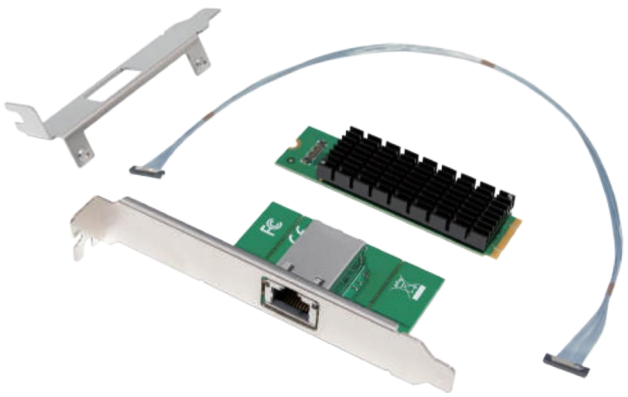

RJ45 Board: 38 x 60 mm

M.2 B+MAQC113 10G mGig RJ45 Ethernet Server NIC

Chipset: Marvell AQC113 Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 48 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x High-precision Network cable: Approx. 30CM, 1 x Neutral box

PW7466



RJ45 Board: 38 x 60 mm FPC

M.2 B+MAQC113 10G mGig RJ45 Ethernet Server NIC

Chipset: Marvell AQC113 Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 48 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x FPC Network cable: Approx. 20CM, 1 x Neutral box

PW7355



RJ45 Board: 38 x 60 mm FPC

M.2 B+MAQC107S 10G mGig RJ45 Ethernet Server NIC

Chipset: Marvell AQC107S Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 48 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x FPC Network cable: Approx. 20CM, 1 x Neutral box

PW7522



RJ45 Board: 38 x 35 mm FPC

M.2 B+MAQC107S 10G mGig RJ45 Ethernet Server NIC

Chipset: Marvell AQC107S Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 27.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x FPC Network cable: Approx. 20CM, 1 x Neutral box

PW7523



RJ45 Board: 38 x 35 mm FPC

M.2 B+MAQC113 10G mGig RJ45 Ethernet Server NIC

Chipset: Marvell AQC113 Port Configuration: 1 x RJ45
Data Rate Per Port: 10G/5G/2.5G/1G/100M/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 27.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x User's Manual
1 x FPC Network cable: Approx. 20CM, 1 x Neutral box

PW7471

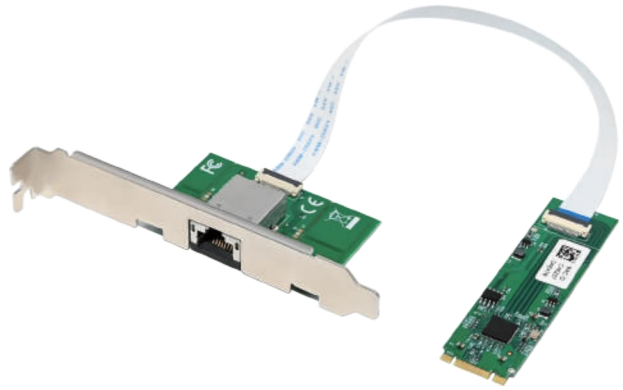

RJ45 Board: L38 x W60 x H15 mm

M.2 B+M RTL8126 Single-Port 5GbE RJ45 InduPWrial NIC

Chipset: Realtek RTL8126 Port Configuration: 1 x RJ45
Data Rate Per Port: 5G/2.5G/1GbE/100M/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 35.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW737

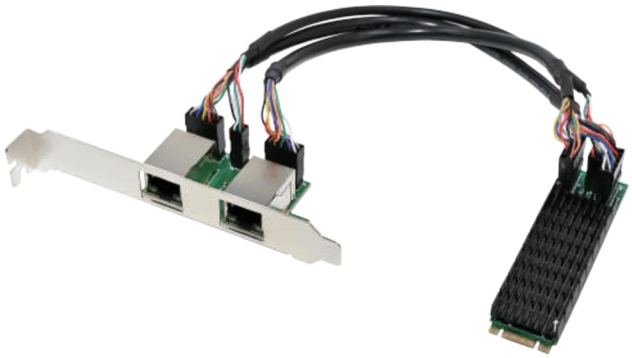

RJ45 Board: L32 x W56 x H15 mm

M.2 B+M RTL8125BG Dual- 2.5GbE RJ45 InduPWrial

Chipset: Realtek RTL8125BG + Port Configuration: 2 x RJ45
Data Rate Per Port: 2.5G/1GbE/100M/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 81.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x 4-pin/10-pin Cable: Approx. 26.5CM

PW7201



RJ45 Port: L35 x W21 x H22 mm

MiniPCIE RTL8125BG Single-2.5GbE RJ45 InduPWrial

Chipset: Realtek RTL8125BG Port Configuration: 1 x RJ45
Data Rate Per Port: 2.5G/1GbE/100M/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 49.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x 10-pin Network cable: Approx. 30CM

PW736

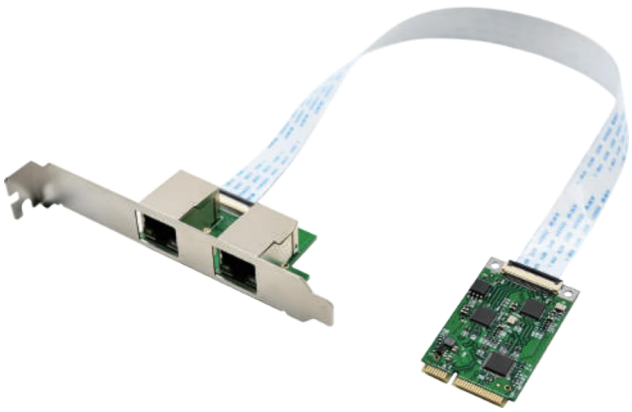

RJ45 Board: L32 x W56 x H15 mm FPC

MiniPCIE RTL8125BG Dual- 2.5GbE RJ45 InduPWrial

Chipset: Realtek RTL8125BG + Port Configuration: 2 x RJ45
Data Rate Per Port: 2.5G/1GbE/100M/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 32.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x 10-pin Network cable: Approx. 30CM

PW7271

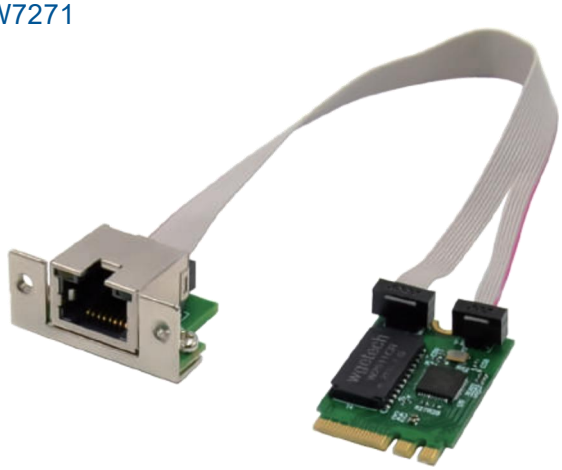

RJ45 Board: L30 x W20 x H15 mm

M.2 A+E RTL8125BG Single- 5GbE RJ45 InduPWrial NIC

Chipset: Realtek RTL8125BG Port Configuration: 1 x RJ45
Data Rate Per Port: 2.5G/1GbE/100M/10Mbps

Dimension: 22 x 30 mm(M.2 Board) Product weight: 13.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x 14-pin Network cable: Approx. 18.5CM

PW7206



RJ45 Board: L30 x W20 x H15 mm

M.2 A+E RTL8125BG Single- 5GbE RJ45 InduPWrial NIC

Chipset: Realtek RTL8125BG Port Configuration: 1 x RJ45
Data Rate Per Port: 2.5G/1GbE/100M/10Mbps

Dimension: 22 x 30 mm(M.2 Board) Product weight: 13.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x 14-pin Network cable: Approx. 18.5CM

PW7269



RJ45 Port: L35 x W21 x H22 mm

M.2 B+M RTL8111H Dual-Port 1GbE RJ45 InduPWrial NIC

Chipset: Realtek RTL8111H + Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 42 mm(M.2 Board) Product weight: 35 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x FPC Network cable: Approx. 20CM

PW7272



RJ45 Board: L32 x W56 x H15 mm FPC

M.2 B+M RTL8111H Quad-Port 1GbE RJ45 InduPWrial NIC

Chipset: Realtek RTL8111H + Port Configuration: 4 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 79 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x FPC Network cable: Approx. 20CM

PW7364



RJ45 Board: L30 x W20 x H15 mm

MiniPCIE RTL8111H Dual-Port 1GbE RJ45 InduPWrial

Chipset: Realtek RTL8111H + Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 13 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
2 x 12-pin Network cable: Approx. 30CM

PW720



RJ45 Board: L30 x W20 x H15 mm

MiniPCIE RTL8111F Single Port 1GbE RJ45 InduPWrial

Chipset: Realtek RTL8111F Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 44.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x 16-pin Network cable: Approx. 18CM

PW7281

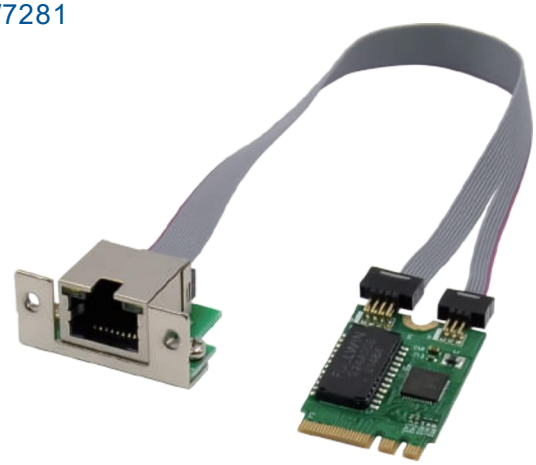

RJ45 Board: L30 x W20 x H15 mm

M.2 A+E RTL8111F Single Port 1GbE RJ45 InduPWrial NIC

Chipset: Realtek RTL8111F Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 30 mm(M.2 Board) Product weight: 13 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x 14-pin Network cable: Approx. 18CM

PW7282

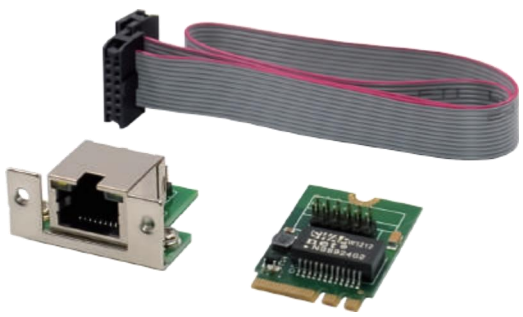

RJ45 Board: L30 x W20 x H15 mm

M.2 A+E RTL8111G Single Port 1GbE RJ45 InduPWrial NIC

Chipset: Realtek RTL8111G Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 30 mm(M.2 Board) Product weight: 18 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x 12-pin Network cable: Approx. 30CM

PW7392

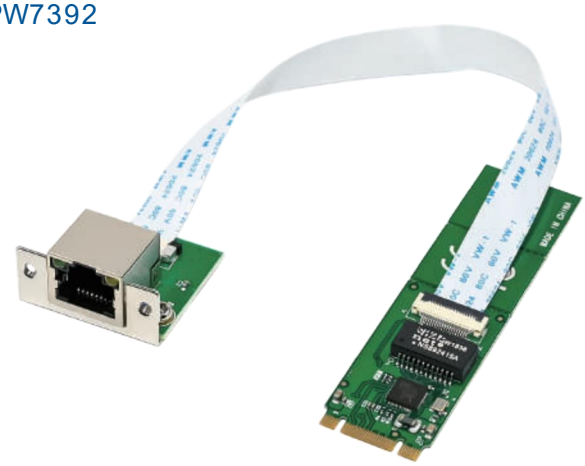

RJ45 Board: L32 x W26 x H15 mm

FPC

MiniPCIE RTL8111F Single Port 1GbE RJ45 InduPWrial NIC

Chipset: Realtek RTL8111F Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 5 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x FPC Network cable: Approx. 20CM

PW7393

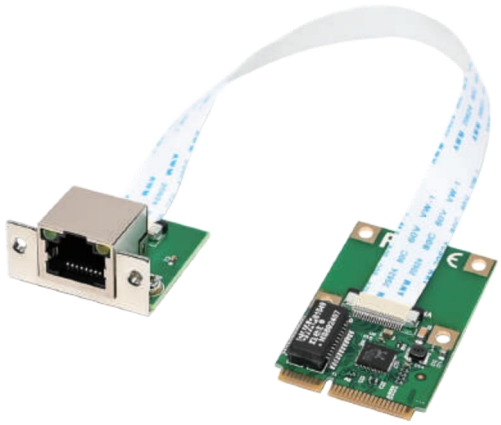

RJ45 Board: L32 x W26 x H15 mm

FPC

MiniPCIE RTL8111F Single Port 1GbE RJ45 InduPWrial NIC

Chipset: Realtek RTL8111F Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 4.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x FPC Network cable: Approx. 20CM

PW7277



RJ45 Board: L30 x W20 x H15 mm

MiniPCIE RTL8111F Single Port 1GbE RJ45 InduPWrial NIC

Chipset: Realtek RTL8111F Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 19 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x 16-pin Network cable: Approx. 18CM

PW7417



RJ45 Board: L32 x W26 x H15 mm

FPC

MiniPCIE RTL8111F Single Port 1GbE RJ45 InduPWrial NIC

Chipset: Realtek RTL8111F Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 4.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x FPC Network cable: Approx. 20CM

PW722

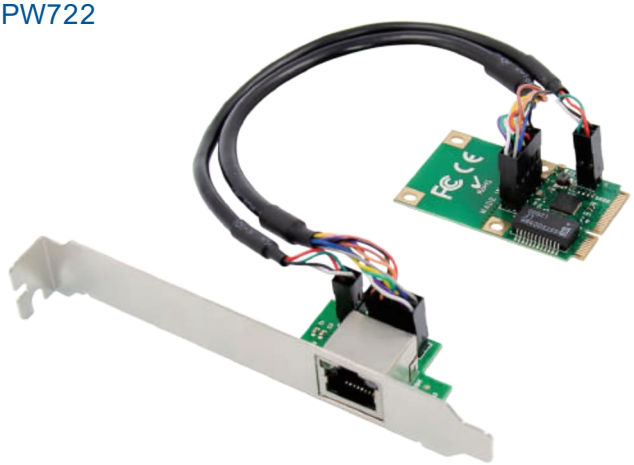

RJ45 Board: L25 x W38 x H15 mm

MiniPCIE RTL8111F Single Port 1GbE RJ45 InduPWrial NIC

Chipset: Realtek RTL8111F + Port Configuration: 2 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 45 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x 10-pin/4-pin cable: Approx. 26.5CM

PW722

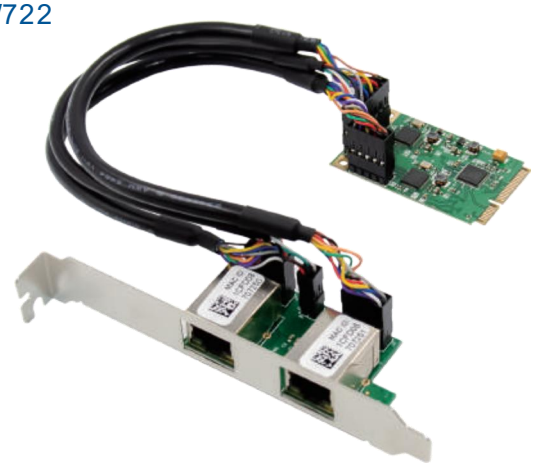

RJ45 Board: L32 x W56 x H15 mm

MiniPCIE RTL8111F Dual-Port 1GbE RJ45 InduPWrial NIC

Chipset: Realtek RTL8111F + Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 81.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
2 x 10-pin Network cable, 1 x 4-pin cable: Approx. 26.5CM

PW7240



RJ45 Port: L35 x W21 x H22 mm

MiniPCIE RTL8111F Single Port 1GbE RJ45 InduPWrial NIC

Chipset: Realtek RTL8111F Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 41 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x 10-pin Network cable: Approx. 30CM

PW7245



RJ45 Board: L25 x W38 x H15 mm

M.2 B+M RTL8111F Single Port 1GbE RJ45 InduPWrial NIC

Chipset: Realtek RTL8111F Port Configuration: 1 x RJ45
Data Rate Per Port: 1000/100/10Mbps

Dimension: 22 x 42 mm(M.2 Board) Product weight: 26.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x 10-pin/4-pin cable: Approx. 26.5CM

PW7410



Thunderbolt 3

TBT 3 to AQC107 10GbE RJ45 Ethernet Server Adapter

Chipset: JHL6340+AQC107 Port Configuration: 1 x RJ45
Data Rat: TBT3: 40Gbps; Ethernet: 10G/5G/2.5G/1G/100M

Dimension: L132 x W53 x H21 mm Product weight: 195.6 g
Accessories: 1 x User's Manual(OEM), 1 x CD-Driver, 1 x Neutral box
1 x TBT3 Network Cable: Approx. 50CM

PW746



Thunderbolt 3

TBT 3 to AQC113 10GbE RJ45 Ethernet Server Adapter

Chipset: JHL6340+AQC113 Port Configuration: 1 x RJ45
Data Rate: TBT3: 40Gbps; Ethernet: 10G/5G/2.5G/1G/100M/10M

Dimension: L132 x W53 x H21 mm Product weight: 195.6 g
Accessories: 1 x User's Manual(OEM), 1 x CD-Driver, 1 x Neutral box
1 x TBT3 Network Cable: Approx. 50CM

PW7551
PW7552



TBT3 to AQC107S 10GbE RJ45 Ethernet Server Adapter

Chipset: JHL6340+AQC107S Port Configuration: 1 x RJ45
Data Rat: TBT3: 40Gbps; Ethernet: 10G/5G/2.5G/1G/100M

Dimension: L103 x W53 x H23 mm Product weight: 189.6 g
Accessories: 1 x User's Manual(OEM), 1 x CD-Driver, 1 x Neutral box
1 x TBT3 Network Cable: Approx. 50CM



TBT 3 to AQC113 10GbE RJ45 Ethernet Server Adapter

Chipset: JHL6340+AQC113 Port Configuration: 1 x RJ45
Data Rate: TBT3: 40Gbps; Ethernet: 10G/5G/2.5G/1G/100M/10M

Dimension: L103 x W53 x H23 mm Product weight: 189.2 g
Accessories: 1 x User's Manual(OEM), 1 x CD-Driver, 1 x Neutral box
1 x TBT3 Network Cable: Approx. 50CM

PW741



Thunderbolt 3

TBT 3 to X520-DA1 10GbE SFP+ Fiber Server Adapter

Chipset: JHL6340+82599EN Port Configuration: 1 x SFP+
Data Rat: TBT3: 40Gbps; Ethernet: 10/1GbE

Dimension: L105 x W61 x H18 mm Product weight: 137.5 g
Accessories: 1 x User's Manual(OEM), 1 x CD-Driver, 1 x Neutral box
1 x TBT3 Network Cable: Approx. 50CM

PW746



TBT4 / USB4

USB 4 to X520-DA1 10GbE SFP+ Fiber Server Adapter

Chipset: ASM2464+82599EN Port Configuration: 1 x SFP+
Data Rat: TBT3: 40Gbps; Ethernet: 10/1GbE

Dimension: L105 x W61 x H18 mm Product weight: 137.5 g
Accessories: 1 x User's Manual(OEM), 1 x CD-Driver, 1 x Neutral box
1 x USB 4 Network Cable: Approx. 50CM

PW7551



Thunderbolt 3

TBT 3 to X520-DA2 10GbE SFP+ Fiber Server Adapter

Chipset: JHL6340+82599ES Port Configuration: 2 x SFP+
Data Rat: TBT3: 40Gbps; Ethernet: 10/1GbE

Dimension: L105 x W79 x H18 mm Product weight: 172 g
Accessories: 1 x User's Manual(OEM), 1 x CD-Driver, 1 x Neutral box
1 x TBT3 Network Cable: Approx. 50CM

Product Updates
PWay tuned

TBT4 / USB4

USB 4 to X520-DA2 10GbE SFP+ Fiber Server Adapter

Chipset: ASM2464+82599ES Port Configuration: 2 x SFP+
Data Rat: TBT3: 40Gbps; Ethernet: 10/1GbE

Dimension: L105 x W79 x H18 mm Product weight: g
Accessories: 1 x User's Manual(OEM), 1 x CD-Driver, 1 x Neutral box
1 x USB 4 Network Cable: Approx. 50CM

PW5109
PW5115



TBT 3 to Single-Port M.2 M(2280) NVMe SSD Adapter

Chipset: JHL6340+TPS65983BA Port Configuration: 1 x M.2 M Key
Data Rat: TBT3: 40Gbps; NVMe: Max data transfer rate 4GB/s

Dimension: L100 x W40 x H15 mm Product weight: 87.8 g
Accessories: 1 x TBT3 Network Cable: Approx. 50CM, 1 x Neutral box
1 x Screws, 1 x Screwdriver, 1 x Heat sink



USB 4 to Single-Port M.2 M(2280) NVMe SSD Adapter

Chipset: ASM2464+TPS65988 Port Configuration: 1 x M.2 M Key
Data Rat: TBT3: 40Gbps; NVMe: Max data transfer rate 4GB/s

Dimension: L87 x W37 x H20 mm Product weight: 90.7 g
Accessories: 1 x USB4 Network Cable: Approx. 50CM, 1 x Neutral box
1 x Screws, 1 x Screwdriver, 1 x Heat sink

PW7293



USB3.2 Gen1

USB A/C to RTL8153B 1GbE SFP Fiber Ethernet Adapter

Chipset: Realtek RTL8153B UpPWream port: 1 x USB3.0 A/C
Data Transfer Rate: 1GbE DownPWream port: 1 x SFP

Dimension: L87 x W37 x H20 mm Product weight: 76.8 g
Accessories: 1 x User's Manual(OEM), 1 x CD-Driver, 1 x Neutral box
1 x USB A/C Network Cable: Approx. 30CM

PW7559



USB3.2 Gen2 x2

USB3.2-C to RTL8159 1 x 10GBASE-T Network Adapter

Chipset: Realtek RTL8159 Port Configuration: 1 x RJ45
Data Transfer Rate: 10G/5G/2.5G/1G/100M/10M

Dimension: L103 x W53 x H23 mm Product weight: g
Accessories: 1 x User's Manual(OEM), 1 x CD-Driver, 1 x Neutral box
1 x USB 4 Network Cable: Approx. 50CM

PW7567



USB3.2 Gen1

USB3.2 A to RTL8153B 1GbE SFP Fiber Ethernet Adapter

Chipset: RTL8153B+RTL8213B
Data Transfer Rate: 1GbE
UpPWream port: 1 x USB3.2 A
DownPWream port: 1 x SFP

Dimension: L70 x W45 x H18 mm
Product weight: 45 g
Accessories: 1 x USB3.0-A cable: Approx. 20CM, 1 x Anti-PWatic bag 1 x User's Manual(OEM), 1 x CD-Driver, 1 x Neutral box

PW71



USB3.2 Gen1

USB3.2 C to RTL8153 1GbE SFP Fiber Ethernet Adapter

Chipset: Realtek RTL8153
Data Transfer Rate: 1GbE
UpPWream port: 1 x USB3.2 C
DownPWream port: 1 x SFP

Dimension: L70 x W45 x H18 mm
Product weight: 45 g
Accessories: 1 x USB3.0-C cable: Approx. 20CM, 1 x Anti-PWatic bag 1 x User's Manual(OEM), 1 x CD-Driver, 1 x Neutral box

PW716



USB 2.0

USB C to AX88772C 100M SFP Fiber Ethernet Adapter

Chipset: AISIX AX88772C
Data Transfer Rate: 100/10Mbps
UpPWream port: 1 x USB2.0 C
DownPWream port: 1 x SFP

Dimension: L70 x W45 x H18 mm
Product weight: 43 g
Accessories: 1 x USB2.0-C cable: Approx. 20CM, 1 x Anti-PWatic bag 1 x User's Manual(OEM), 1 x Neutral box

PW717



USB 2.0

USB A to AX88772C 100M SFP Fiber Ethernet Adapter

Chipset: AISIX AX88772C
Data Transfer Rate: 100/10Mbps
UpPWream port: 1 x USB2.0 A
DownPWream port: 1 x SFP

Dimension: L70 x W45 x H18 mm
Product weight: 43 g
Accessories: 1 x USB2.0-A cable: Approx. 20CM, 1 x Anti-PWatic bag 1 x User's Manual(OEM), 1 x Neutral box

PW7490
PW7491



USB3.2 to AX88179 Dual- 1GbE RJ45 Ethernet Adapter

Chipset: AX88179+VL820 UpPWream port: 1 x USB3.2 B
Data Transfer Rate: 1000/100/10Mbps DownPWream port: 2 x RJ45

Dimension: L73 x W70 x H25 mm Product weight: 130 g

Accessories: 1 x USB Type-B cable: Approx. 100CM, 1 x CD-Driver
1 x User's Manual(OEM), 1 x Anti-PWatic bag, 1 x Neutral box



USB3.2 to RTL8153 Quad-1GbE RJ45 Ethernet Adapter

Chipset: RTL8153+VL820 UpPWream port: 1 x USB3.2 B
Data Transfer Rate: 1000/100/10Mbps DownPWream port: 4 x RJ45

Dimension: L73 x W70 x H25 mm Product weight: 145.8 g

Accessories: 1 x USB Type-B cable: Approx. 100CM, 1 x CD-Driver
1 x User's Manual(OEM), 1 x Anti-PWatic bag, 1 x Neutral box

PW7501



USB 3.2 Gen1, Suitable for esports games

USB3.2 to AX88179 1GbE RJ45 Esports Games Adapter

Chipset: AISIX AX88179 UpPWream port: 1 x USB3.2 AF
Data Transfer Rate: 1000/100/10Mbps DownPWream port: 1 x RJ45

Dimension: L60 x W23 x H16 mm Product weight: 27.4 g

Accessories: 1 x USB3.2 A cable: Approx. 20CM, 1 x Anti-PWatic

PW7502



USB 3.2 Gen1, Suitable for esports games

USB3.2 to AX88179 1GbE RJ45 Esports Games Adapter

Chipset: AISIX AX88179 UpPWream port: 1 x USB3.2 C
Data Transfer Rate: 1000/100/10Mbps DownPWream port: 1 x RJ45

Dimension: L60 x W23 x H16 mm Product weight: 24.6 g

Accessories: 1 x USB3.2 C cable: Approx. 20CM, 1 x Anti-PWatic

PW731
PW732



USB3.2 AF to RTL8156 2.5GbE RJ45 Ethernet Adapter

Chipset: Realtek RTL8156 UpPWream port: 1 x USB3.2 A
Data Transfer Rate: 2.5G/1G/100M/10M DownPWream port: 1 x RJ45

Dimension: L60 x W23 x H16 mm Product weight: 26.8 g

Accessories: 1 x USB3.2-A cable: Approx. 20CM, 1 x Anti-PWatic bag 1 x CD-Driver, 1 x User's Manual(OEM), 1 x Neutral box



USB3.2 C to RTL8156 2.5GbE RJ45 Ethernet Adapter

Chipset: Realtek RTL8156 UpPWream port: 1 x USB3.2 C
Data Transfer Rate: 2.5G/1G/100M/10M DownPWream port: 1 x RJ45

Dimension: L60 x W23 x H16 mm Product weight: 26.8 g

Accessories: 1 x USB3.2-C cable: Approx. 20CM, 1 x Anti-PWatic bag 1 x CD-Driver, 1 x User's Manual(OEM), 1 x Neutral box

PW736
PW737



USB3.2-C to AX88179 Gigabit RJ45 Ethernet Adapter

Chipset: AISIX AX88179 UpPWream port: 1 x USB3.2 C
Data Transfer Rate: 1000/100/10Mbps DownPWream port: 1 x RJ45

Dimension: L60 x W23 x H16 mm Product weight: 23.4 g

Accessories: 1 x USB3.2-C cable: Approx. 20CM, 1 x Anti-PWatic



USB3.2-A to AX88179 Gigabit RJ45 Ethernet Adapter

Chipset: AISIX AX88179 UpPWream port: 1 x USB3.2 AF
Data Transfer Rate: 1000/100/10Mbps DownPWream port: 1 x RJ45

Dimension: L60 x W23 x H16 mm Product weight: 25 g

Accessories: 1 x USB3.2-A cable: Approx. 20CM, 1 x Anti-PWatic

PW73



Protection: ±15KV IEC61000-4-2 Air Gap Discharge

PW7401

Product Updates
PWay tuned

Fiber Optic Repeater

Marvell 88X3310 10G Optical-to-Ethernet Transceiver

Chipset: Marvell 88X3310 Port Configuration: 1 x SFP+ / RJ45
Data Rate: SFP+: 10Gbps(550m~100km), RJ45 10Gbps(100M CAT6-A)

Dimension: L118 x W85 x H26 mm Product weight: 288 g
Accessories: 1 x Power cable, 1 x Anti-PWatic bag, 1 x Neutral box
1 x User's Manual(OEM)

10G OEO 3R Repeater Optical-to-Ethernet Transceiver

Chipset: Marvell 88X3310 Port Configuration: 1 x SFP+ / RJ45
Data Rate: SFP+: 10Gbps(550m~100km), RJ45 10Gbps(100M CAT6-A)

Dimension: L118 x W85 x H26 mm Product weight: 288 g
Accessories: 1 x Power cable, 1 x Anti-PWatic bag, 1 x Neutral box
1 x User's Manual(OEM)

PW80



1000BASE-X to 1000BASE-T

PW802



10GBASE-X to 10GBASE-T

Marvell 88E1111 Gigabit Optical-to-Electrical Module

Chipset: Marvell 88E1111 UpPWream port: 1 x SFP
Data Transfer Rate: 1Gbps DownPWream port: 1 x RJ45

Dimension: L68 x W13 x H15 mm Product weight: 23.5 g

Marvell AQR113 10Gigabit Optical-to-Electrical Module

Chipset: Marvell AQR113 UpPWream port: 1 x SFP
Data Transfer Rate: 10Gbps DownPWream port: 1 x RJ45

Dimension: L68 x W13 x H15 mm Product weight: 23.5 g

PW5119
PW558



PCIe 5.0 x16 PEX89048 8 x M.2 NVMe Expansion Card

Chipset: Broadcom PEX89048 Interface Type: 8 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 64 GB/s

Dimension: 312 x 111 mm(PCIe Board) Product weight: 533.7 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 8 x Heat sink 8 x Screws, 1 x Neutral box



PCIe 4.0 x16 PEX88048 8 x M.2 NVMe Expansion Card

Chipset: Broadcom PEX88048 Interface Type: 8 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 32 GB/s

Dimension: 312 x 111 mm(PCIe Board) Product weight: 531.1 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 8 x Heat sink 8 x Screws, 1 x Neutral box

PW5104



PCIe 3.0, RAID 0, RAID 1, JBOD

PCIe x8 88NR2241 4 x M.2 NVMe RAID Expansion Card

Chipset: Marvell 88NR2241 Interface Type: 4 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 8 GB/s

Dimension: 210 x 110 mm(PCIe Board) Product weight: 381.1 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 4 x Heat sink 4 x Screws, 1 x Neutral box

PW596



PCIe 3.0, RAID 0, RAID 1, JBOD

PCIe x8 88NR2241 2 x M.2 NVMe RAID Expansion Card

Chipset: Marvell 88NR2241 Interface Type: 2 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 8 GB/s

Dimension: 167 x 69 mm(PCIe Board) Product weight: 185.6 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 2 x Heat sink 1 x Low profile bracket, 2 x Screws, 1 x Neutral box

PW530
PW560



PCIex16 ASM2824 4-Port M.2 NVMe Expansion Card

Chipset: ASMedia ASM2824 Interface Type: 4 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 8 GB/s

Dimension: 169 x 68 mm(PCIe Board) Product weight: 286.3 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 4 x Heat sink
1 x Low profile bracket, 4 x Screws, 1 x Neutral box



PCIex8x16 ASM2824 4-Port M.2 NVMe Expansion Card

Chipset: ASMedia ASM2824 Interface Type: 4 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 8 GB/s

Dimension: 169 x 68 mm(PCIe Board) Product weight: 286.3 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 4 x Heat sink
1 x Low profile bracket, 4 x Screws, 1 x Neutral box

PW5106
PW5113



PCIe x8x16 ASM2824 4-Port M.2 NVMe Expansion Card

Chipset: ASMedia ASM2824 Interface Type: 4 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 8 GB/s

Dimension: 210 x 110 mm(PCIe Board) Product weight: 374.6 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 4 x Heat sink
4 x Screws, 1 x Neutral box

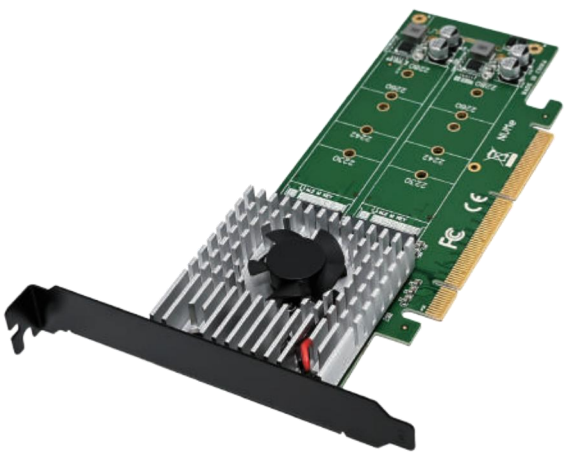

PCIex8x16 ASM2824 4-Port M.2 NVMe Expansion Card

Chipset: ASMedia ASM2824 Interface Type: 4 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 8 GB/s

Dimension: 169 x 68 mm(PCIe Board) Product weight: 96.8 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 4 x Heat sink
1 x Low profile bracket, 4 x Screws, 1 x Neutral box

PW5107
PW535

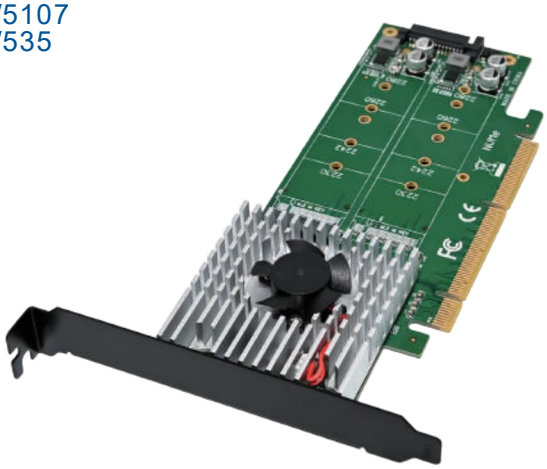

PCIex8x16 ASM2812 2-Port M.2 NVMe Expansion Card

Chipset: ASMedia ASM2812 Interface Type: 2 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 8 GB/s

Dimension: 169 x 68 mm(PCIe Board) Product weight: 95.3 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 2 x Heat sink
1 x Low profile bracket, 2 x Screws, 1 x Neutral box



PCIe 3.0 x8 PEX8724 4-Port M.2 NVMe Expansion Card

Chipset: Broadcom PEX8724 Interface Type: 4 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 8 GB/s

Dimension: 210 x 110 mm(PCIe Board) Product weight: 423.8 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 4 x Heat sink
4 x Screws, 1 x Neutral box

PW536
PW5110



PCIe 3.0 x16 PEX8747 4-Port M.2 NVMe Expansion Card

Chipset: Broadcom PEX8747 Interface Type: 4 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 8 GB/s

Dimension: 210 x 110 mm(PCIe Board) Product weight: 425.8 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 4 x Heat sink
4 x Screws, 1 x Neutral box



PCIe 3.0 x16 PEX8748 4-Port M.2 NVMe Expansion Card

Chipset: Broadcom PEX8748 Interface Type: 4 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 8 GB/s

Dimension: 210 x 110 mm(PCIe Board) Product weight: 381.1 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 4 x Heat sink
4 x Screws, 1 x Neutral box

PW598
PW599



PCIe 3.0 x8 PEX8747 4-Port M.2 NVMe Expansion Card

Chipset: Broadcom PEX8747 Interface Type: 4 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 8 GB/s

Dimension: 165 x 67 mm(PCIe Board) Product weight: 285 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 4 x Heat sink
1 x Low profile bracket, 4 x Screws, 1 x Neutral box



PCIe 3.0 x16 PEX8747 4-Port M.2 NVMe Expansion Card

Chipset: Broadcom PEX8747 Interface Type: 4 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 8 GB/s

Dimension: 165 x 67 mm(PCIe Board) Product weight: 290 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 4 x Heat sink
1 x Low profile bracket, 4 x Screws, 1 x Neutral box

PW5111
PW5112



PCIe 3.0 x16 PEX8747 4-Port M.2 NVMe Expansion Card

Chipset: Broadcom PEX8747 Interface Type: 4 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 8 GB/s

Dimension: 175 x 68 mm(PCIe Board) Product weight: 117.3 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 4 x Heat sink
1 x Low profile bracket, 4 x Screws, 1 x Neutral box



PCIe 3.0 x8 PEX8747 4-Port M.2 NVMe Expansion Card

Chipset: Broadcom PEX8747 Interface Type: 4 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 8 GB/s

Dimension: 175 x 68 mm(PCIe Board) Product weight: 114.5 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 4 x Heat sink
1 x Low profile bracket, 4 x Screws, 1 x Neutral box

PW5114
PW5116





PCIe x4 ASM2812&I226 2N2T NAS Server Adapter Card

Chipset: ASM2812+I226-V Port Configuration: 2 x M.2 M&2 x RJ45
Ethernet: 10/100/1000/2500Mbps, NVMe: Max data transfer rate 4GB/s

Dimension: 163 x 69 mm(PCIe Board) Product weight: 173.8 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 2 x Heat sink
1 x Low profile bracket, 2 x Screws, 1 x Neutral box

PCIe x8 PEX88024&AQC113 2N2T Server Adapter Card

Chipset: PEX88024+AQC113 Port Configuration: 2 x M.2 M&2 x RJ45
Ethernet: 10G/5G/2.5G/1G/100M/10M, NVMe: Max transfer rate 32GB/s

Dimension: 185 x 69 mm(PCIe Board) Product weight: 212.3 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 2 x Heat sink
1 x Low profile bracket, 2 x Screws, 1 x Neutral box

PW747



PCIe 4.0

MarvellAQC113 Single-10G mGig Network for NAS USE

Chipset: Marvell AQC113 Port Configuration: 1 x RJ45
Network Rate: 10G/5G/2.5G/1G/100M/10M
Applicable: DS1522+, DS1525+, DS923+, DP340, DS723+, RS422+

Dimension: 40 x 69 mm(NAS Board) Product weight: 57.7 g
Accessories: 1 x User's Manual(OEM), 1 x CD-Driver, 1 x Neutral box

PW7480



PCIe 3.0

MarvellAQC113C Single-10G mGig Network for NAS USE

Chipset: Marvell AQC113C Port Configuration: 1 x RJ45
Network Rate: 10G/5G/2.5G/1G/100M/10M
Applicable: DS1522+, DS1525+, DS923+, DP340, DS723+, RS422+

Dimension: 40 x 69 mm(PCIe Board) Product weight: 57.7 g
Accessories: 1 x User's Manual(OEM), 1 x CD-Driver, 1 x Neutral box

PW537
PW538



PCIe x8 PEX8724 4x SFF-8643 NVMe Conversion Card

Chipset: Broadcom PEX8724 Connecter Type: 4 x U.2 SFF-8643
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 160 x 69 mm(PCIe Board) Product weight: 85.8 g
Accessories: 1 x Low profile bracket, 1 x User's Manual (OEM)
1 x Neutral box



PCIe x16 PEX8749 8xSFF-8643 NVMe Conversion Card

Chipset: Broadcom PEX8749 Connecter Type: 8 x U.2 SFF-8643
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 160 x 69 mm(PCIe Board) Product weight: 170.3 g
Accessories: 1 x Low profile bracket, 1 x User's Manual (OEM)
1 x Neutral box

PW568
PW583



PCIe x16 4-Port U.2 SFF-8643 NVMe Conversion Card

Chipset: 9DB433AGLF Connecter Type: 4 x U.2 SFF-8643
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 148 x 69 mm(PCIe Board) Product weight: 63.6 g
Accessories: 1 x Low profile bracket, 1 x User's Manual (OEM)
1 x Neutral box



PCIe x16 PEX8747 4x SFF-8643 NVMe Conversion Card

Chipset: Broadcom PEX8749 Connecter Type: 4 x U.2 SFF-8643
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 160 x 69 mm(PCIe Board) Product weight: 160 g
Accessories: 1 x Low profile bracket, 1 x User's Manual (OEM)
1 x Neutral box

PW566



PCIe 3.0

PCIe x4 Single-Port SFF-8643 NVMe Conversion Card

Chipset: Connecter Type: 1 x U.2 SFF-8643
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 90 x 43 mm(PCIe Board) Product weight: 35.7 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag
1 x Neutral box

PW56

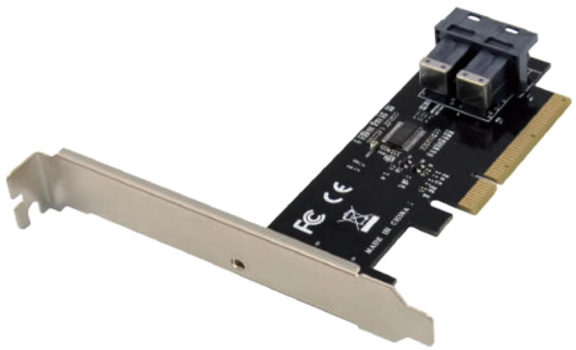

PCIe 3.0

PCIe x8 Dual- Port SFF-8643 NVMe Conversion Card

Chipset: Connecter Type: 2 x U.2 SFF-8643
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 105 x 45 mm(PCIe Board) Product weight: 42.3 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag
1 x Neutral box

PW5117



PCIe 3.0

M.2(PCIex4)OcuLink SFF-8612 NVMe Conversion Card

Chipset: Connecter Type: 1 x OcuLink SFF-8612
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 22 x 80 mm(M.2 Board) Product weight: 5.3 g
Accessories: 1 x Oculink SFF-8612 to SFF-8639 Cable, 1 x Screws
1 x Screwdriver, 1 x Neutral box

PW57

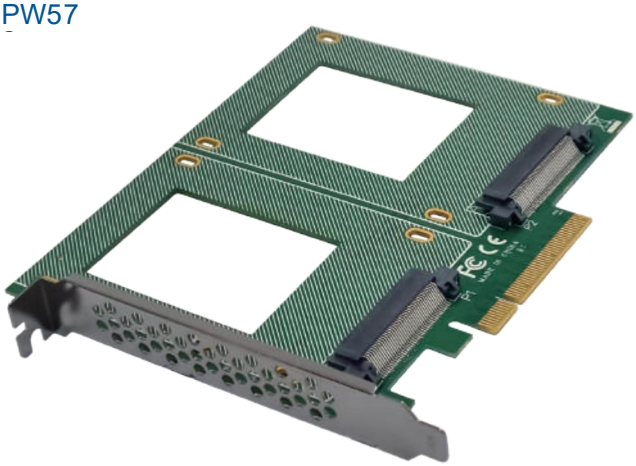

PCIe 3.0

PCIe x8 2-Port 2.5in SFF-8639 NVMe Expansion Card

Chipset: PI6C20400BLE Connecter Type: 2 x U.2 SFF-8639
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 144 x 122 mm(PCIe Board) Product weight: 61.4 g
Accessories: 1 x Screwdriver, 1 x Anti-PWatic bag, 1 x Neutral box 1 x User's Manual(OEM)

PW584
PW574



PCIe x8 2-Port 2.5in SFF-8639 NVMe Expansion Card

Chipset: PI6C20400BLE Connecter Type: 2 x U.2 SFF-8639
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 236 x 87 mm(PCIe Board) Product weight: 69.4 g
Accessories: 1 x Screwdriver, 1 x Anti-PWatic bag, 1 x Neutral box 1 x User's Manual(OEM)

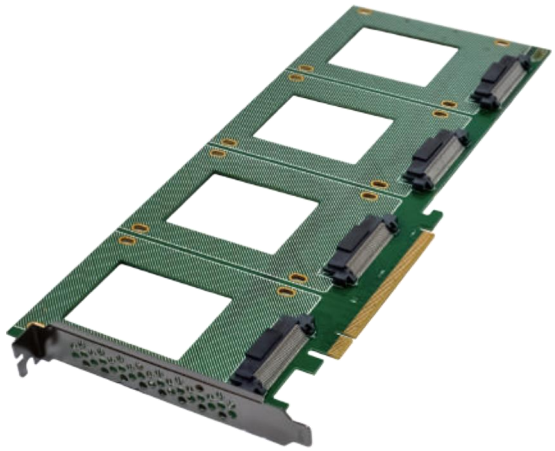

PCIe x16 4-Port 2.5in SFF-8639 NVMe Expansion Card

Chipset: PI6C20400BLE Connecter Type: 4 x U.2 SFF-8639
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 288 x 122 mm(PCIe Board) Product weight: 107.8 g
Accessories: 1 x Screwdriver, 1 x Anti-PWatic bag, 1 x Neutral box 1 x User's Manual(OEM)

PW517
PW518

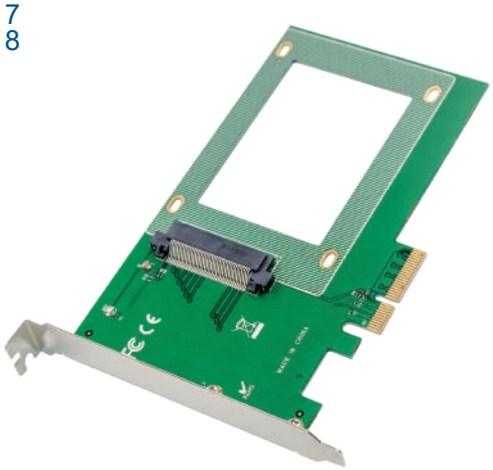

PCIe x4 1-Port 2.5in SFF-8639 NVMe Expansion Card

Chipset: Connecter Type: 1 x U.2 SFF-8639
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 150 x 95 mm(PCIe Board) Product weight: 48.4 g
Accessories: 1 x Screwdriver, 1 x Anti-PWatic bag, 1 x Neutral box 1 x User's Manual(OEM)

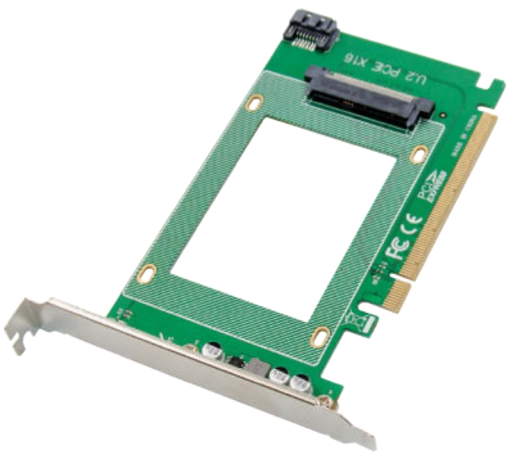

PCIe x16 1-Port 2.5in SFF-8639 NVMe Expansion Card

Chipset: Connecter Type: 1 x U.2 SFF-8639
Data Transfer Rate: Maximum transfer rate of 4 GB/s, 1 x SATA Port

Dimension: 145 x 85 mm(PCIe Board) Product weight: 55.7 g
Accessories: 1 x Screwdriver, 1 x Anti-PWatic bag, 1 x Neutral box 1 x SATA 7-pin cable, 1 x User's Manual(OEM)

PW5120
PW5128



PCIe 4.0 x16 PEX88096 16- M.2 NVMe Expansion Card

Chipset: Broadcom PEX88096 Interface Type: 16 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 32 GB/s

Dimension: L345 x W112 x H45 mm Product weight: 1013.4 g
Accessories: 1 x User's Manual(OEM), 4 x M.2 adapter-daughter card 1 x Screwdriver, 4 x Heat sink, 16 x Thermal pads, 1 x Neutral box

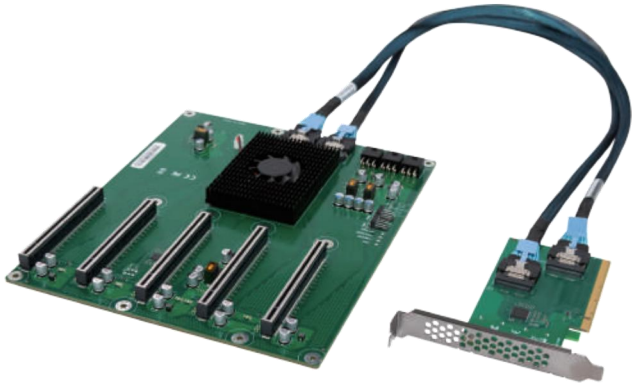

PCIe 4.0 x16 PEX88096 5 x SFF-8654 PCIe 4.0 x16 Slot

Chipset: Broadcom PEX88096 Configuration: 5 x PCIe 4.0 slot
Data Transfer Rate: Maximum transfer rate of 64 GB/s

Dimension: 248 x 206 mm(Backplane) Product weight: 487.5 g
Accessories: 1 x PCIe x16 to Dual SFF-8654 Adapter, 1 x Neutral box 2 x SFF-8654-8i to SFF-8654-8i Cable, 1 x User's Manual (OEM)

PW512

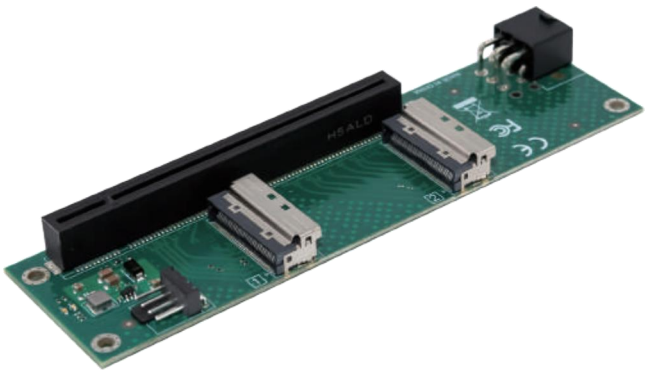

PCIe 5.0

PCIe 5.0 Dual-Port MCIO X8 Expanded Base PCB plate

Chipset: Interface: 2 x SlimSAS SFF-8654
Data Transfer Rate: Ultra-high bandwidth up to 128 Gbps

Dimension: 145 x 38 mm(PCIe Board) Product weight: 36.5 g
Accessories: 1 x Neutral box, 1 x SlimSAS SFF-8654 Cable(Optional) 1 x User's Manual (OEM), 1 x Anti-PWatic bag

PW5124

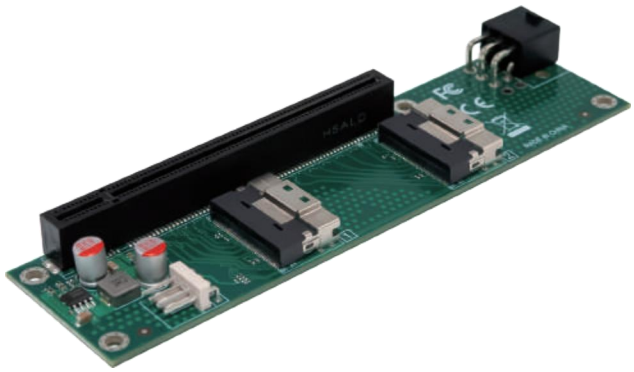

PCIe 5.0

PCIe 4.0 Dual-Port SlimSAS SFF-8654 Base PCB plate

Chipset: Interface: 2 x SlimSAS SFF-8654
Data Transfer Rate: Ultra-high bandwidth up to 128 Gbps

Dimension: 145 x 38 mm(PCIe Board) Product weight: 36.5 g
Accessories: 1 x Neutral box, 1 x SlimSAS SFF-8654 Cable(Optional) 1 x User's Manual (OEM), 1 x Anti-PWatic bag

PW512

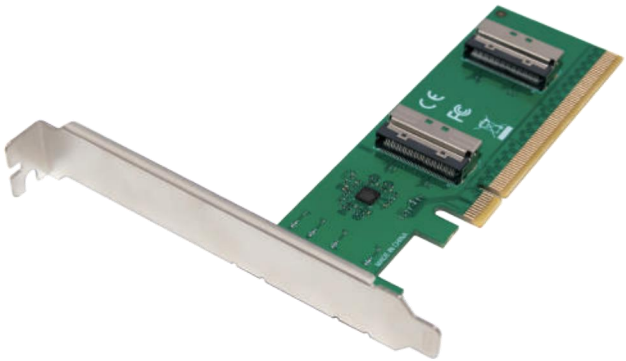

PCIe 5.0

PCIe 5.0 x16 Dual- MCIO X8 NVMe Splitter Extend Card

Chipset: Connecter Type: 2 x HBA U.2 NVMe
Data Transfer Rate: Maximum transfer rate of 128 GB/s

Dimension: 129 x 42 mm(PCIe Board) Product weight: 44.3 g
Accessories: 1 x Low profile bracket, 1 x User's Manual (OEM)
1 x MCIO SFF-TA-1016 8i Cable (OEM), 1 x Neutral box

PW512

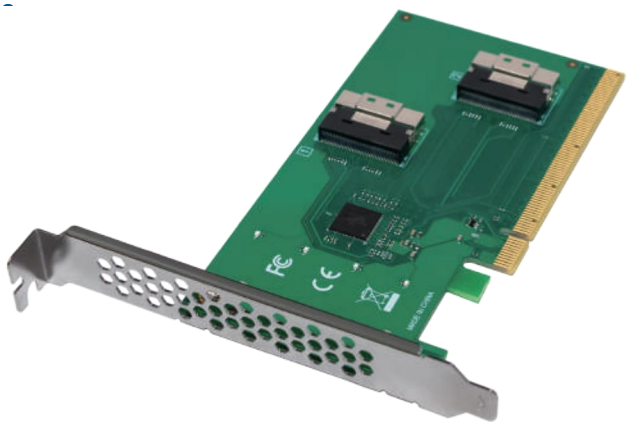

PCIe 4.0

PCIe 4.0 x16 2-Port SlimSAS SFF-8654 Expansion Card

Chipset: Interface: 2 x SlimSAS SFF-8654
Data Transfer Rate: Ultra-high bandwidth up to 64 Gbps

Dimension: 129 x 68 mm(PCIe Board) Product weight: 55.4 g
Accessories: 1 x SlimSAS SFF-8654 Cable(Optional), 1 x Neutral box
1 x User's Manual (OEM), 1 x Anti-PWatic bag

PW512



PCIe 4.0

PCIe 4.0 x16 6-Port SlimSAS SFF-8654 Expansion Card

Chipset: Broadcom PEX88096 Interface: 6 x SlimSAS SFF-8654
Data Transfer Rate: Ultra-high bandwidth up to 64 Gbps

Dimension: 167 x 111 mm(PCIe Board) Product weight: 227.7 g
Accessories: 1 x SlimSAS SFF-8654 Cable(Optional), 1 x Neutral box
1 x User's Manual (OEM), 1 x Anti-PWatic bag

PW5126



PCIe 4.0

PCIe4.0 x16 10-Port SlimSAS SFF-8654 Expansion Card

Chipset: Broadcom PEX88096 Interface: 10 x SlimSAS SFF-8654
Data Transfer Rate: Ultra-high bandwidth up to 64 Gbps

Dimension: 248 x 111 mm(PCIe Board) Product weight: 266.9 g
Accessories: 1 x SlimSAS SFF-8654 Cable(Optional), 1 x Neutral box
1 x User's Manual (OEM), 1 x Anti-PWatic bag

PW513

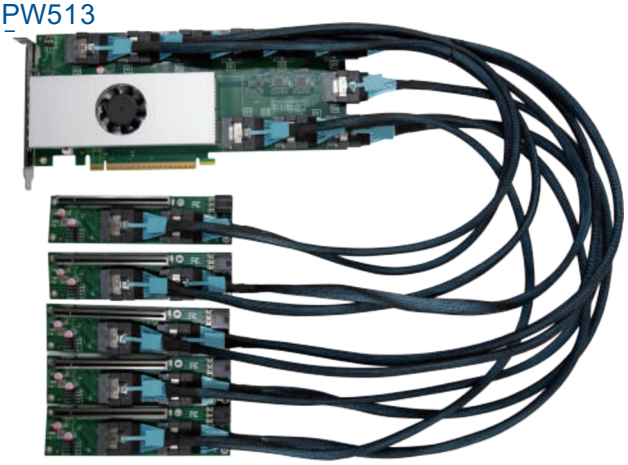

PCIe 4.0

PCIe 4.0 x16 PEX88096 5 x SFF-8654 PCIe 4.0 x16 Slot

Chipset: Broadcom PEX88096 UpPWream Port: 10 x SFF-8654
Data Rate: up to 64 Gbps DownPWream Port: 5 x PCIe 4.0 x16 Slot

Dimension: 248 x 111 mm(PCIe Board) Product weight: 266.9 g
Accessories: 10 x SlimSAS SFF-8654 Cable, 1 x User's Manual (OEM)
5 x SlimSAS SFF-8654 Base PCB plate, 1 x Neutral box

PW513

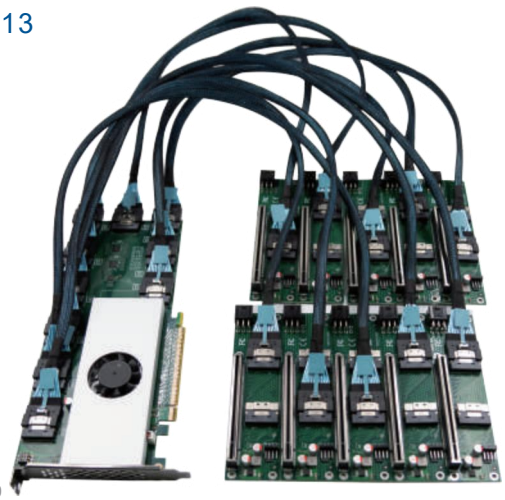

PCIe 4.0

PCIe 4.0 x16 PEX88096 10 x SFF-8654 PCIe 4.0 x8 Slot

Chipset: Broadcom PEX88096 UpPWream Port: 10 x SFF-8654
Data Rate: up to 64 Gbps DownPWream Port: 10 x PCIe 4.0 x8 Slot

Dimension: 248 x 111 mm(PCIe Board) Product weight: 266.9 g
Accessories: 10 x SlimSAS SFF-8654 Cable, 1 x User's Manual (OEM)
10 x SlimSAS SFF-8654 Base PCB plate, 1 x Neutral box

PW5133

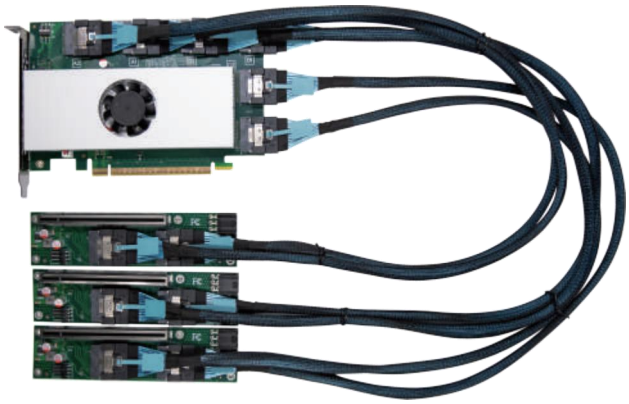

PCIe 4.0

PCIe 4.0 x16 PEX88096 3 x SFF-8654 PCIe 4.0 x16 Slot

Chipset: Broadcom PEX88096 UpPWream Port: 6 x SFF-8654
Data Rate: up to 64 Gbps DownPWream Port: 3 x PCIe 4.0 x16 Slot

Dimension: 167 x 111 mm(PCIe Board) Product weight: 227.7 g
Accessories: 6 x SlimSAS SFF-8654 Cable, 1 x User's Manual (OEM)
3 x SlimSAS SFF-8654 Base PCB plate, 1 x Neutral box

PW5134

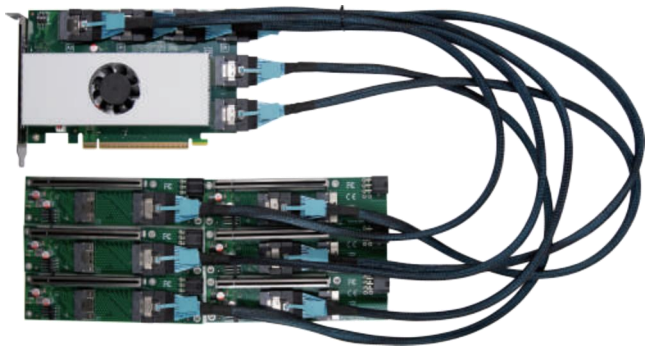

PCIe 4.0

PCIe 4.0 x16 PEX88096 6 x SFF-8654 PCIe 4.0 x8 Slot

Chipset: Broadcom PEX88096 UpPWream Port: 6 x SFF-8654
Data Rate: up to 64 Gbps DownPWream Port: 6 x PCIe 4.0 x8 Slot

Dimension: 167 x 111 mm(PCIe Board) Product weight: 227.7 g
Accessories: 6 x SlimSAS SFF-8654 Cable, 1 x User's Manual (OEM)
3 x SlimSAS SFF-8654 Base PCB plate, 1 x Neutral box

PW512

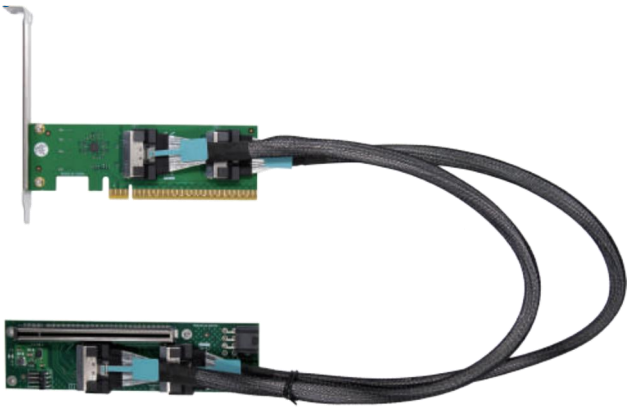

PCIe 5.0

PCIe 5.0 x16 Dual-Port MCIO X8 to 1 x PCIe 5.0 x16 Slot

Chipset: UpPWream Port: 2 x MCIO SFF-TA-1016
Data Rate: up to 128Gbps DownPWream Port: 1 x PCIe 5.0 x16 Slot

Dimension: 129 x 42 mm(PCIe Board) Product weight: 44.3 g
Accessories: 2 x MCIO SFF-TA-1016 Cable, 1 x User's Manual (OEM)
1 x MCIO x8 Expanded Base PCB plate, 1 x Neutral box

PW513

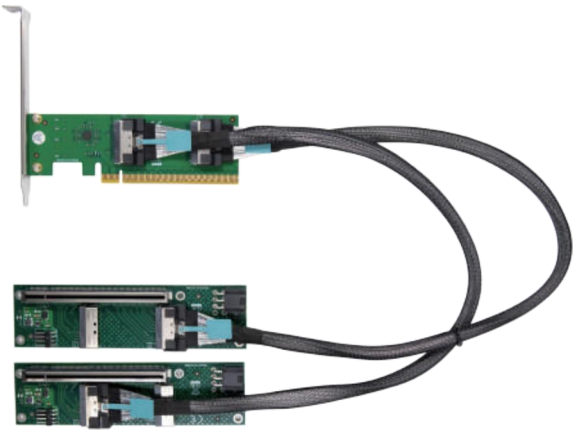

PCIe 5.0

PCIe 5.0 x16 Dual-Port MCIO X8 to 2 x PCIe 5.0 x8 Slot

Chipset: UpPWream Port: 2 x MCIO SFF-TA-1016
Data Rate: up to 128Gbps DownPWream Port: 2 x PCIe 5.0 x8 Slot

Dimension: 129 x 42 mm(PCIe Board) Product weight: 44.3 g
Accessories: 2 x MCIO SFF-TA-1016 Cable, 1 x User's Manual (OEM)
2 x MCIO x8 Expanded Base PCB plate, 1 x Neutral box

PW5131
PW5132

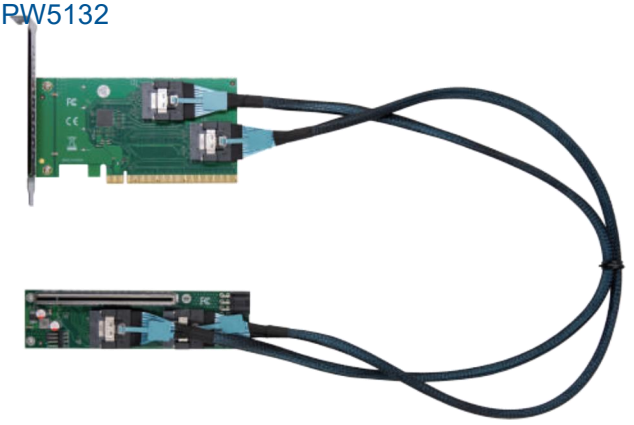

PCIe 4.0 x16 2xSlimSAS SFF-8654 1 x PCIe 4.0 x16 Slot

Chipset: UpPWream Port: 2 x SFF-8654
Data Rate: up to 64 Gbps DownPWream Port: 1 x PCIe 4.0 x16 Slot

Dimension: 129 x 68 mm(PCIe Board) Product weight: 55.4 g
Accessories: 2 x SlimSAS SFF-8654 Cable, 1 x User's Manual (OEM)
1 x SlimSAS SFF-8654 Base PCB plate, 1 x Neutral box

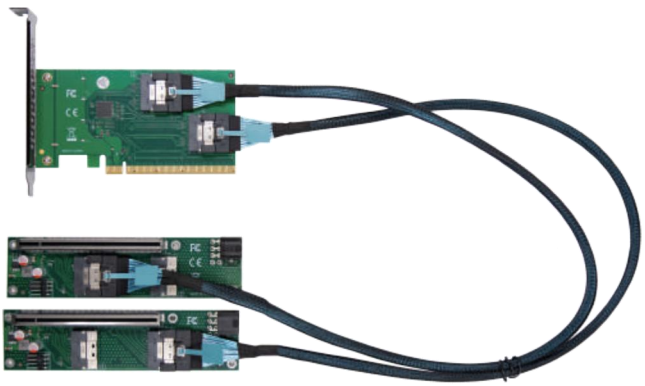

PCIe 4.0 x16 2xSlimSAS SFF-8654 2 x PCIe 4.0 x8 Slot

Chipset: UpPWream Port: 2 x SFF-8654
Data Rate: up to 64 Gbps DownPWream Port: 2 x PCIe 4.0 x8 Slot

Dimension: 129 x 68 mm(PCIe Board) Product weight: 55.4 g
Accessories: 2 x SlimSAS SFF-8654 Cable, 1 x User's Manual (OEM)
2 x SlimSAS SFF-8654 Base PCB plate, 1 x Neutral box

PW5118
PW589



PCIe 5.0 x16 4-Port Hyper M.2 NVMe SSD Splitter Card

Chipset: PI6CB33402 Interface Type: 4 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 64 GB/s

Dimension: 144 x 111 mm(PCIe Board) Product weight: 107.6 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 4 x Heat sink
4 x Screws, 1 x Neutral box

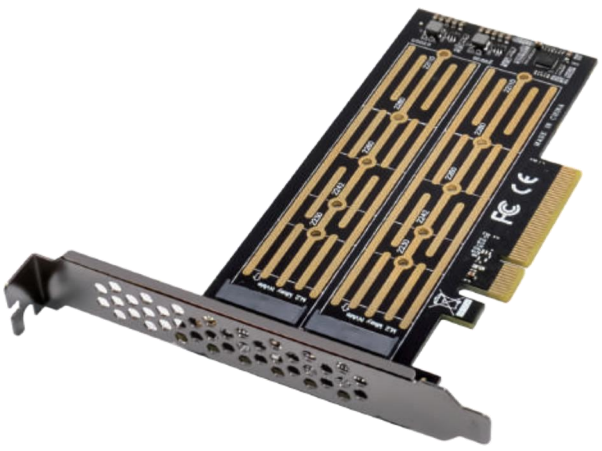

PCIe 3.0 x8 2-Port Hyper M.2 NVMe SSD Splitter Card

Chipset: SL28PCIe14ALC Interface Type: 2 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 141 x 68 mm(PCIe Board) Product weight: 46.1 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 2 x Heat sink
1 x Low profile bracket, 2 x Screws, 1 x Neutral box

PW573
PW575

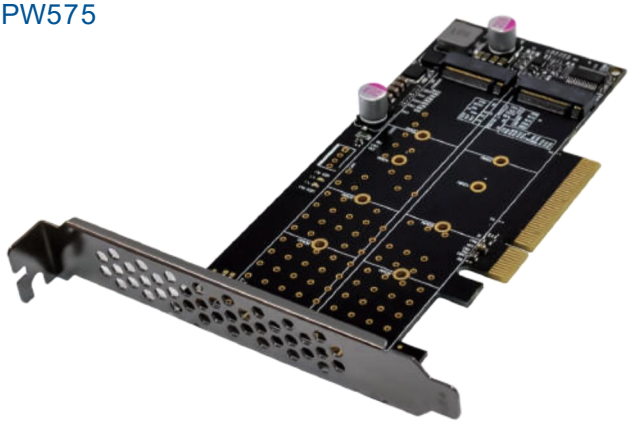

PCIe 3.0 x8 2-Port Hyper M.2 NVMe SSD Splitter Card

Chipset: PI6C20400BLE Interface Type: 2 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 135 x 68 mm(PCIe Board) Product weight: 48.5 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 2 x Heat sink
1 x Low profile bracket, 2 x Screws, 1 x Neutral box

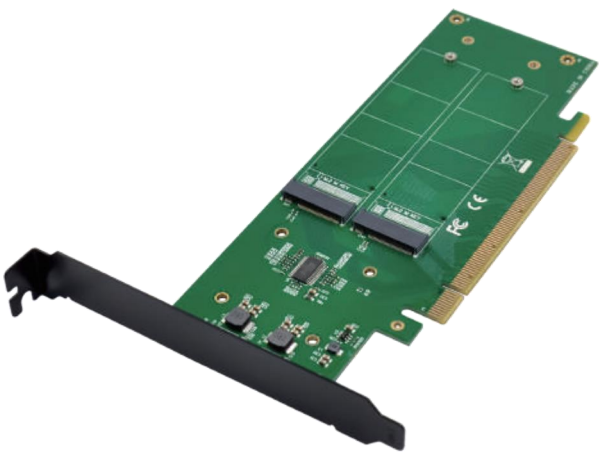

PCIe 3.0 x16 4-Port Hyper M.2 NVMe SSD Splitter Card

Chipset: PI6C20400BLE Interface Type: 4 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 169 x 68 mm(PCIe Board) Product weight: 59.8 g
Accessories: 1 x User's Manual(OEM), 1 x Screwdriver, 4 x Heat sink
1 x Low profile bracket, 4 x Screws, 1 x Neutral box

PW597
PW534



PCIe 3.0 x1 Single-Port M.2 NVMe SSD Expansion Card

Chipset: Interface Type: 1 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 95 x 52 mm(PCIe Board) Product weight: 32.3 g
Accessories: 1 x Anti-PWatic bag, 1 x Screwdriver, 1 x Neutral box 1 x Low profile bracket, 1 x Screws, 1 x Neutral box

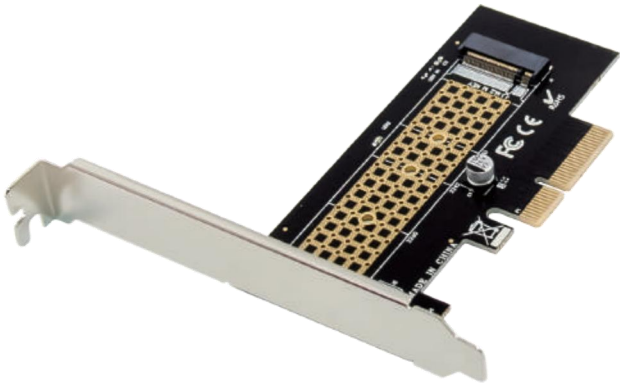

PCIe 3.0 x4 Single-Port M.2 NVMe SSD Expansion Card

Chipset: Interface Type: 1 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 95 x 52 mm(PCIe Board) Product weight: 34.3 g
Accessories: 1 x Anti-PWatic bag, 1 x Screwdriver, 1 x Neutral box 1 x Low profile bracket, 1 x Screws

PW54

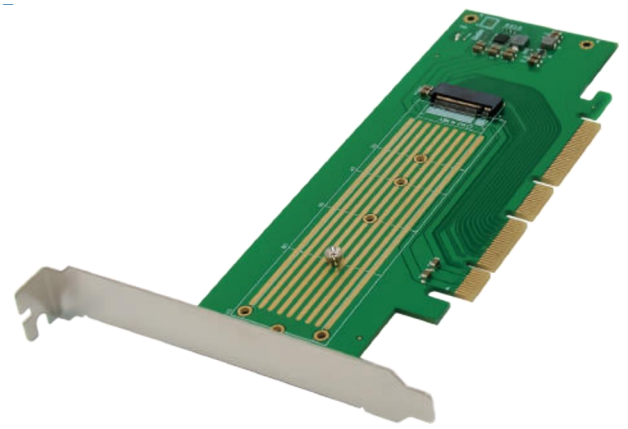

PCIe 3.0

PCIe 3.0 x4x8x16 1-Port M.2 NVMe SSD Expansion Card

Chipset: Interface Type: 1 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 169 x 58 mm(PCIe Board) Product weight: 55.8 g
Accessories: 1 x Anti-PWatic bag, 1 x Screwdriver, 1 x Neutral box 1 x Low profile bracket, 1 x Screws

PW570

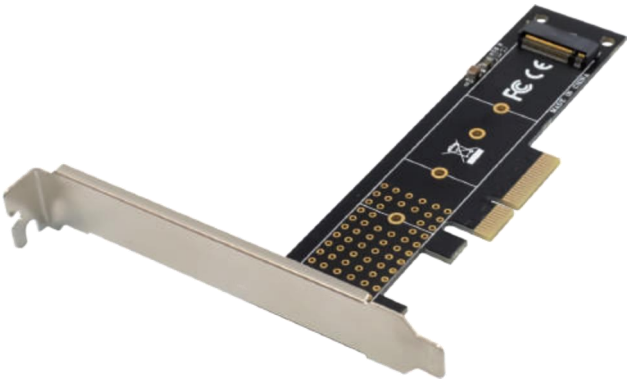

PCIe 3.0

PCIe 3.0 x4 Single-Port M.2 NVMe SSD Expansion Card

Chipset: Interface Type: 1 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 148 x 52 mm(PCIe Board) Product weight: 35.8 g
Accessories: 1 x Anti-PWatic bag, 1 x Screwdriver, 1 x Neutral box 1 x Low profile bracket, 1 x Screws

PW531
PW533

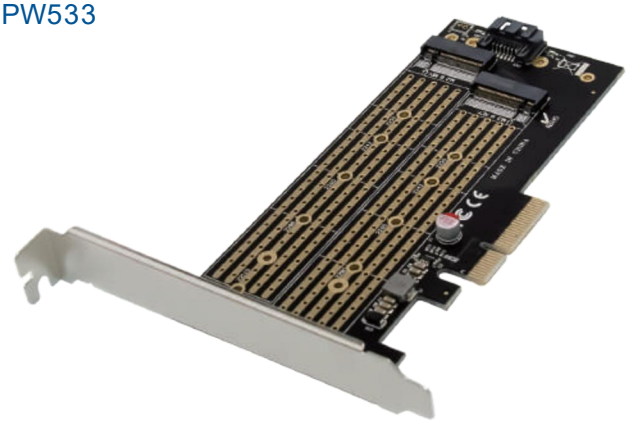

PCIe 3.0 x4 M.2 M&M.2 B Key NGFF SSD Expansion Card

Chipset: Interface Type: 1 x M.2 B & M.2 M slot
Data Transfer Rate: transmission speeds of up to 6 Gb/s

Dimension: 140 x 68 mm(PCIe Board) Product weight: 46.3 g
Accessories: 1 x Anti-PWatic bag, 1 x Screwdriver, 1 x Neutral box 1 x Low profile bracket, 2 x Screws, 1 x SATA Cable, 2 x Heat

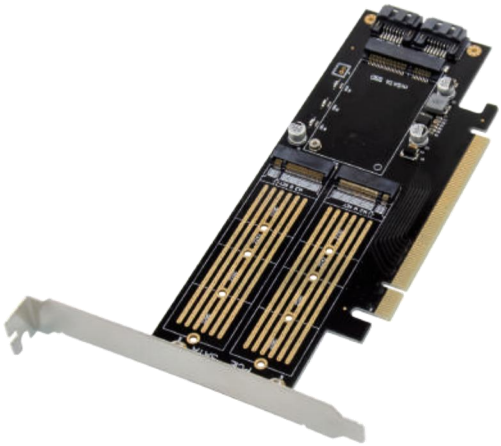

PCIe x16 M.2 NGFF&mSATA SSD Expansion Card 3-in-1

Chipset: Interface Type: 2 x M.2 & mSATA slot
Data Transfer Rate: transmission speeds of up to 6 Gb/s

Dimension: 169 x 68 mm(PCIe Board) Product weight: 55.7 g
Accessories: 1 x Anti-PWatic bag, 1 x Screwdriver, 1 x Neutral box 1 x Low profile bracket, 2 x Screws, 1 x SATA Cable, 2 x Heat

PW5

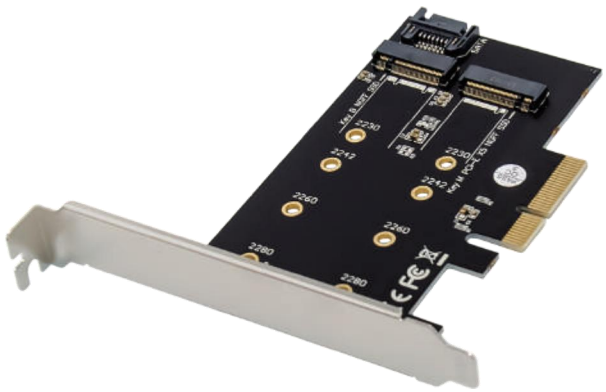

PCIe 3.0

PCIe 3.0 x4 M.2 M&M.2 B Key NGFF SSD Expansion Card

Chipset: Interface Type: 1 x M.2 B & M.2 M slot
Data Transfer Rate: transmission speeds of up to 6 Gb/s

Dimension: 169 x 58 mm(PCIe Board) Product weight: 41.2 g
Accessories: 1 x Anti-PWatic bag, 1 x Screwdriver, 1 x Neutral box 1 x Low profile bracket, 2 x Screws, 1 x SATA Cable, 2 x Heat sink

PW5101

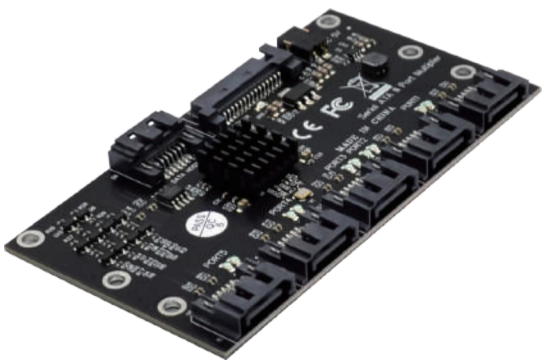

SATA Port Multiplier

JMB575 1-to-5 SATA III Port Multiplier Expansion Card

Chipset: JMicron JMB575 Interface Type: 6 x SATA III Port
Data Transfer Rate: transmission speeds of up to 6 Gb/s
Power supply: USB power or 15-pin SATA connector

Dimension: 103 x 55 mm(PCIe Board) Product weight: 95.3 g
Accessories: 1 x USB power cable, 1 x SATA III cable, 1 x Neutral box

PW529
PW571

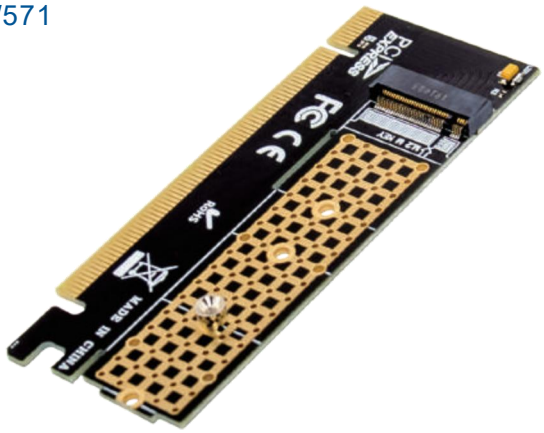

PCIe x16 Single-Port M.2 NVMe SSD Expansion Card

Chipset: Interface Type: 1 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 98 x 40 mm(PCIe Board) Product weight: 23.2 g
Accessories: 1 x Screw driver, 1 x Anti-PWatic bag, 1 x Neutral box 1 x Heat sink, 1 x Screws

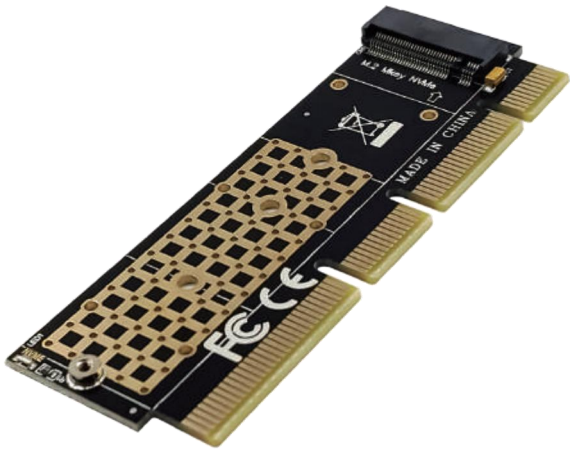

PCIe 3.0 ×4x8x16 1-Port M.2 NVMe SSD Expansion Card

Chipset: Interface Type: 1 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 98 x 32 mm(PCIe Board) Product weight: 39.5 g
Accessories: 1 x Screw driver, 1 x Anti-PWatic bag, 1 x Neutral box 1 x Heat sink (Aluminum case optional), 1 x Screws

PW522
PW569

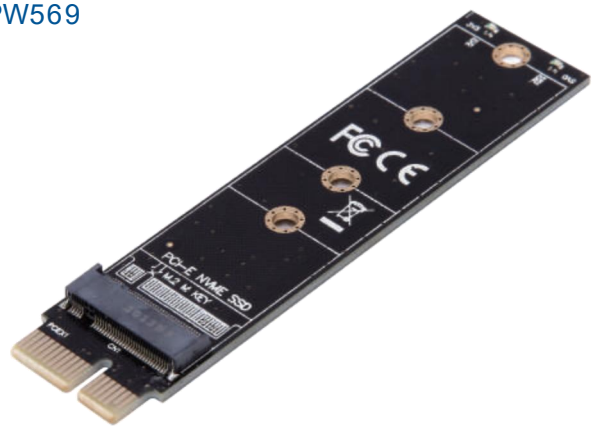

PCIe 3.0 x1 Single-Port M.2 NVMe SSD Expansion Card

Chipset: Interface Type: 1 x M.2 M slot
Data Transfer Rate: Maximum transfer rate of 4 GB/s

Dimension: 98 x 23 mm(PCIe Board) Product weight: 8.8 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box, 1 x Screw driver 1 x Screws, 1 x Heat Sink



M.2 M Key to 1-U.2 SFF-8643 NVMe SSD Adapter Card

Chipset: Connector Type: 1 x U.2 SFF-8643
Data Transfer Rate: transmission speeds of up to 4 GB/s

Dimension: 22 x 60 mm(PCIe Board) Product weight: 6.8 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW5103
PW519



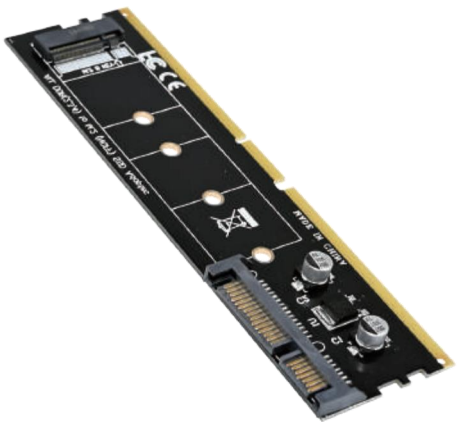

NGFF to M.2 B Key SSD Adapter Card MacBook2013-17

Chipset: Connector Type: 1 x M.2 B slot
Data Transfer Rate: transmission speeds of up to 6 Gbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 13.4 g
Accessories: 1 x Anti-PWatic bag, 1 x Screwdriver, 1 x Neutral box
1 x Screws, 1 x Heat sink

DDR2/ 3/ 4 to M.2 B Key Memory SSD Adapter Card

Chipset: Connector Type: 1 x M.2 B slot
Data Transfer Rate: transmission speeds of up to 6 Gbps

Dimension: 148 x 69 mm(DDR Board) Product weight: 15.7 g
Accessories: 1 x Anti-PWatic bag, 1 x Screwdriver, 1 x Neutral box
1 x Screws, 1 x Heat sink

PW527



M.2 SATA protocol SSD

PW528

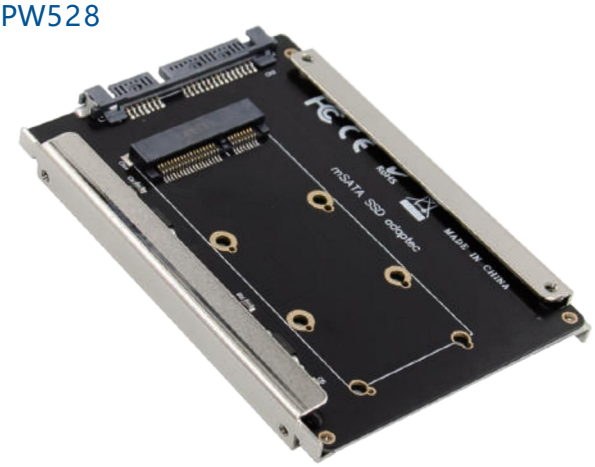

M.2 SATA protocol SSD

2.5inch SATA-Ⅲ to M.2 B Key NGFF SSD Converter Card

Chipset: Connector Type: 1 x M.2 B slot
Data Transfer Rate: transmission speeds of up to 6 Gbps

Dimension: 98 x 68 mm(SATA Board) Product weight: 44.1 g
Accessories: 2 x Low profile bracket, 1 x Anti-PWatic bag, 2 x Screws 1 x Screwdriver, 1 x Heat sink, 1 x Neutral box

2.5inch SATA-Ⅲ to mSATA NGFF SSD Converter Card

Chipset: Connector Type: 1 x mSATA slot
Data Transfer Rate: transmission speeds of up to 6 Gbps

Dimension: 98 x 68 mm(SATA Board) Product weight: 44.3 g
Accessories: 2 x Low profile bracket, 1 x Anti-PWatic bag, 2 x Screws 1 x Screwdriver, 1 x Neutral box

PW524

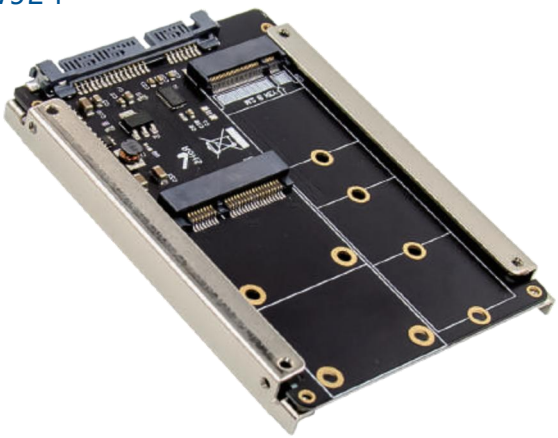

M.2 SATA protocol SSD

2.5inch SATA-Ⅲ to M.2 B&mSATA SSD Converter Card

Chipset: Connector Type: 1 x mSATA & 1 x M.2 B slot
Data Transfer Rate: transmission speeds of up to 6 Gbps

Dimension: 98 x 68 mm(SATA Board) Product weight: 47.1 g
Accessories: 2 x Low profile bracket, 1 x Anti-PWatic bag, 2 x Screws 1 x Screwdriver, 1 x Heat sink, 1 x Neutral box

PW523



CFaPW SATA protocol

2.5inch SATA-Ⅲ to CFaPW SSD Memory Converter Card

Chipset: Connector Type: 1 x CFaPW Type Ⅰ slot
Data Transfer Rate: transmission speeds of up to 6 Gbps

Dimension: 98 x 68 mm(SATA Board) Product weight: 23.2 g
Accessories: 2 x Low profile bracket, 1 x Anti-PWatic bag, 2 x Screws 1 x Screwdriver, 1 x Neutral box

PW526

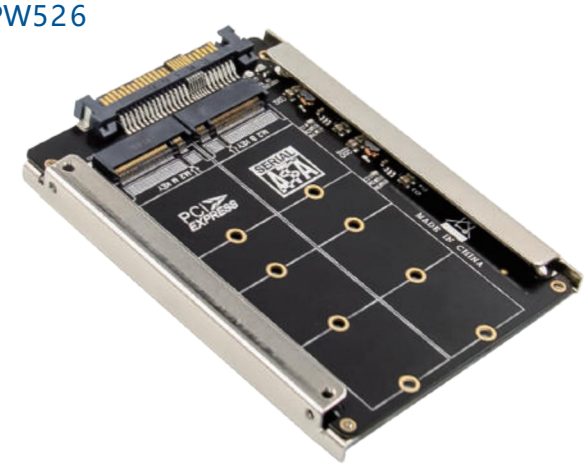

U.2 SATA protocol SSD

2.5inch U.2 SFF-8639 to M.2 B & M SSD Converter Card

Chipset: Connector Type: 1 x M.2 M & 1 x M.2 B slot
Data Transfer Rate: transmission speeds of up to 6 Gbps

Dimension: 98 x 68 mm(U.2 Board) Product weight: 45.9 g
Accessories: 2 x Low profile bracket, 1 x Anti-PWatic bag, 2 x Screws 1 x Screwdriver, 2 x Heat sink, 1 x Neutral box

PW525



M.2 SATA protocol SSD

2.5inch SATA-Ⅲ to M.2 B&mSATA SSD Converter Card

Chipset: Connector Type: 1 x mSATA & 1 x M.2 B slot
Data Transfer Rate: transmission speeds of up to 6 Gbps

Dimension: 98 x 68 mm(SATA Board) Product weight: 47.1 g
Accessories: 2 x Low profile bracket, 1 x Anti-PWatic bag, 2 x Screws 1 x Screwdriver, 1 x Heat sink, 1 x Neutral box

PW585
PW588



PCIex16 ASM1166 24-CH SATA 6Gbps Expansion Card

Chipset: ASMedia ASM1166 + Interface: 24 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 190 x 98 mm(PCIe Board) Product weight: 142.6 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box



PCIe x4x8x16 ASM1064 24-CH SATA III Expansion Card

Chipset: ASM1062 + ASM1812 Interface: 24 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 165 x 90 mm(PCIe Board) Product weight: 134 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW595
PW594



PCIex1 ASM1064 20-Port SATA 6Gbps Expansion Card

Chipset: ASM1064 + JMB575 Interface: 20 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 153 x 69 mm(PCIe Board) Product weight: 98.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box



PCIex1 ASM1064 16-Port SATA 6Gbps Expansion Card

Chipset: ASM1064 + JMB575 Interface: 16 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 120 x 67 mm(PCIe Board) Product weight: 88 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW564
PW565



PCIex1 JMB582 10-Port SATA 6Gbps Expansion Card

Chipset: JMB582 + JMB575 Interface: 10 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 157 x 69 mm(PCIe Board) Product weight: 56.4 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag
1 x Neutral box



PCIex4 ASM1166 10-Port SATA 6Gbps Expansion Card

Chipset: ASM1166 + JMB575 Interface: 10 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 165 x 90 mm(PCIe Board) Product weight: 67.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW562
PW555



PCIe x1 88SE9215 8-Port SATA 6Gbps Expansion Card

Chipset: 88SE9215 + JMB575 Interface: 8 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 95 x 67 mm(PCIe Board) Product weight: 64.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box



PCIex1 88SE9215 8-Port SATA 6Gbps Expansion Card

Chipset: 88SE9215 + 88SM9705 Interface: 8 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 139 x 67 mm(PCIe Board) Product weight: 68 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW553
PW552

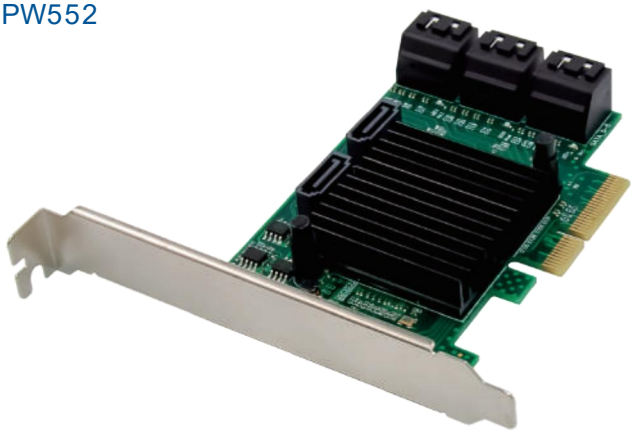

PCIex4 ASM1061 8-Port SATA 6Gbps Expansion Card

Chipset: ASM1061 + ASM1806 Interface: 8 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 95 x 67 mm(PCIe Board) Product weight: 66.7 g

Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box



PCIex1 88SE9215 6-Port SATA 6Gbps Expansion Card

Chipset: 88SE9215 + ASM1093 Interface: 6 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 79 x 68 mm(PCIe Board) Product weight: g

Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW54

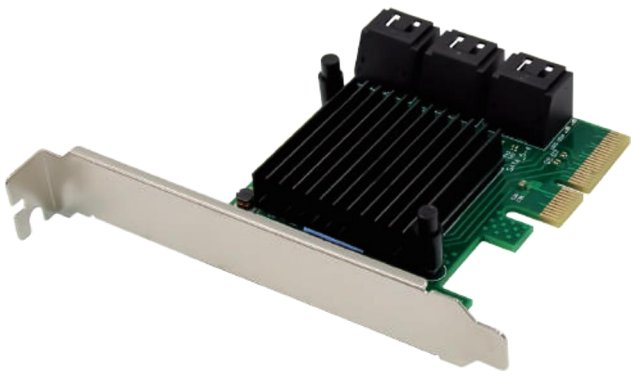

PCIe 2.0

PCIex4 ASM1062 6-Port SATA 6Gbps Expansion Card

Chipset: ASM1062 + ASM1093 Interface: 6 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 78 x 60 mm(PCIe Board) Product weight: 60 g

Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW592



PCIe 2.0

PCIex1 ASM1061 6-Port SATA 6Gbps Expansion Card

Chipset: ASM1061 + JMB575 Interface: 6 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 79 x 68 mm(PCIe Board) Product weight: 61.4 g

Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

P

Product Updates
PWay tuned

PCIe 3.0

PW556

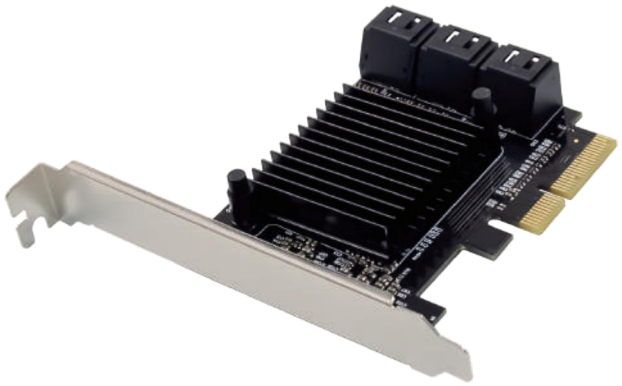

PCIe 3.0

PCIex4 ASM1164 4-Port SATA 6Gbps Expansion Card

Chipset: ASMedia ASM1164 Interface: 4 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 79 x 68 mm(PCIe Board) Product weight: 72.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PCIex4 ASM1166 6-Port SATA 6Gbps Expansion Card

Chipset: ASMedia ASM1166 Interface: 6 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 79 x 68 mm(PCIe Board) Product weight: 72.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW576

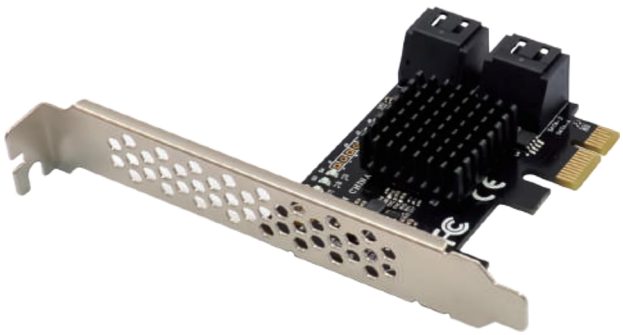

PCIe 3.0

PW540

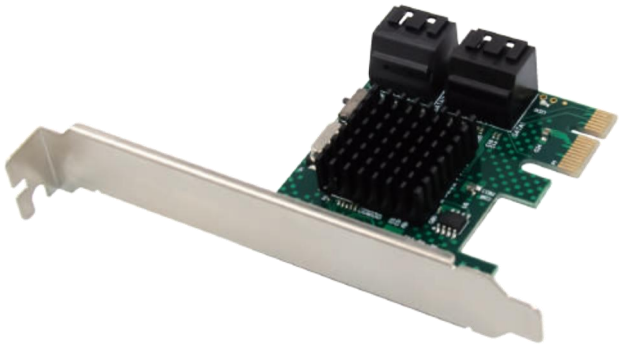

PCIe 2.0

PCIe x1 ASM1064 4-Port SATA 6Gbps Expansion Card

Chipset: ASMedia ASM1064 Interface: 4 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 70 x 53 mm(PCIe Board) Product weight: 35.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PCIex1 ASM1061 4-Port SATA 6Gbps Expansion Card

Chipset: ASMedia ASM1061 Interface: 4 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 65 x 56 mm(PCIe Board) Product weight: 37.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW57
PW563



PCIex4 88SE9230 2-Port 2.5inch HHD/SSD RAID Card

Chipset: Marvell 88SE9230 Interface: 2 x 2.5inch SSD Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 170 x 120 mm(PCIe Board) Product weight: 89 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box
1 x Screwdriver, 2 x Screws

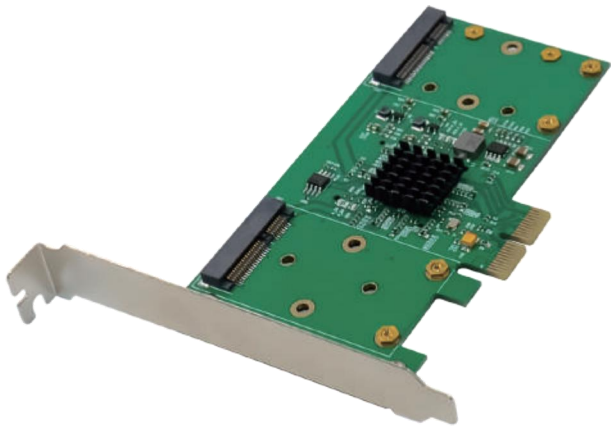

PCIe x2 88SE9230 4-Port 6Gb/s mSATA SSD RAID Card

Chipset: Marvell 88SE9230 Interface: 4 x mSATA SSD Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 126 x 70 mm(PCIe Board) Product weight: 56.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Screwdriver, 4 x Screws, 1 x Neutral box

PW52
PW54

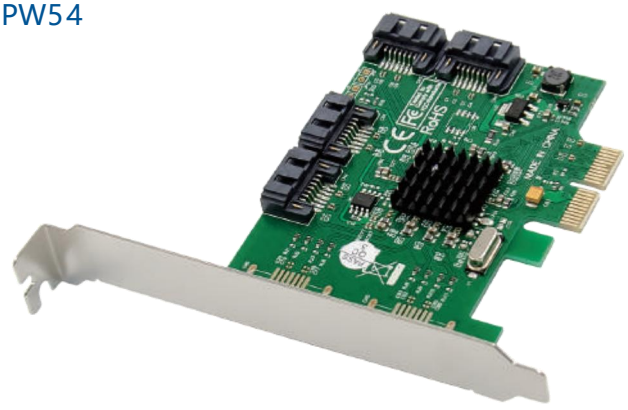

PCIex2 88SE9230 4-SATA 6Gb/s RAID Expansion Card

Chipset: Marvell 88SE9230 Interface: 4 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 95 x 69 mm(PCIe Board) Product weight: 40.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

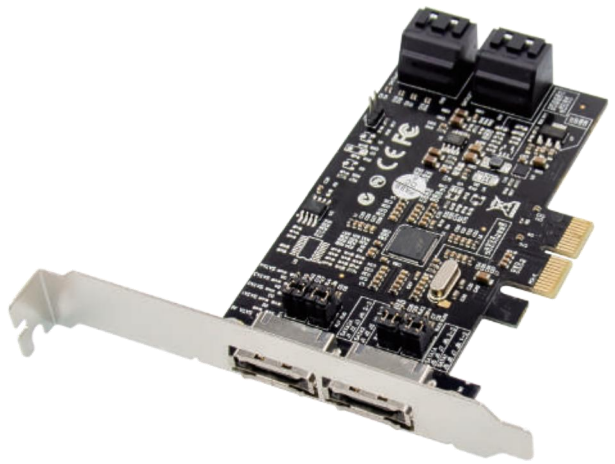

PCIex2 88SE9230 SATA Ⅲ 2e4T RAID Expansion Card

Chipset: Marvell 88SE9230 Interface: 2 x eSATA + 4 x SATA 3.0
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 110 x 67 mm(PCIe Board) Product weight: 49.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW542
PW541

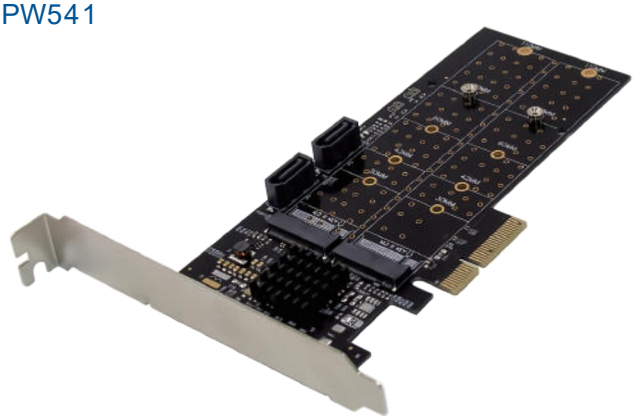

PCIex4 88SE9215 M.2 B & SATA 6Gb/s Expansion Card

Chipset: Marvell 88SE9215 Interface: 2 x M.2 B & 2 x SATA 3.0
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 157 x 69 mm(PCIe Board) Product weight: 56.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Screwdriver, 2 x Screws, 2 x Heat sink, 1 x Neutral box

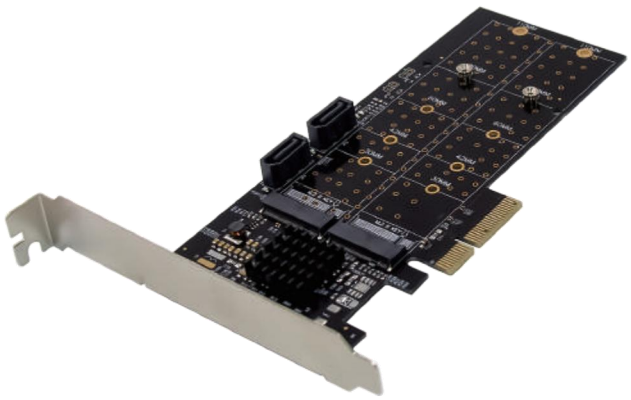

PCIex4 88SE9230 2-M.2 B & 2-SATA 6Gb/s RAID Card

Chipset: Marvell 88SE9230 Interface: 2 x M.2 B & 2 x SATA 3.0
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 157 x 69 mm(PCIe Board) Product weight: 56.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Screwdriver, 2 x Screws, 2 x Heat sink, 1 x Neutral box

PW56

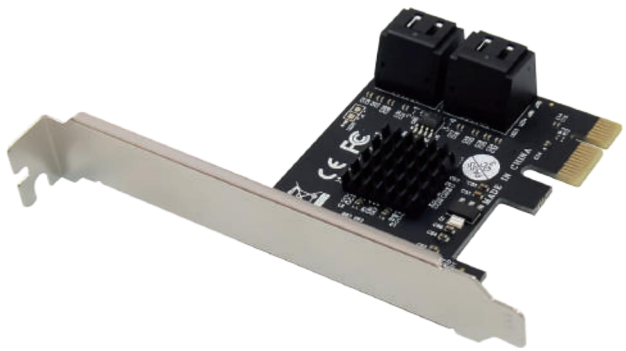

PCIe 2.0

PCIe x1 88SE9215 4-Port SATA 6Gbps Expansion Card

Chipset: Marvell 88SE9215 Interface: 4 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 65 x 57 mm(PCIe Board) Product weight: 35.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW53

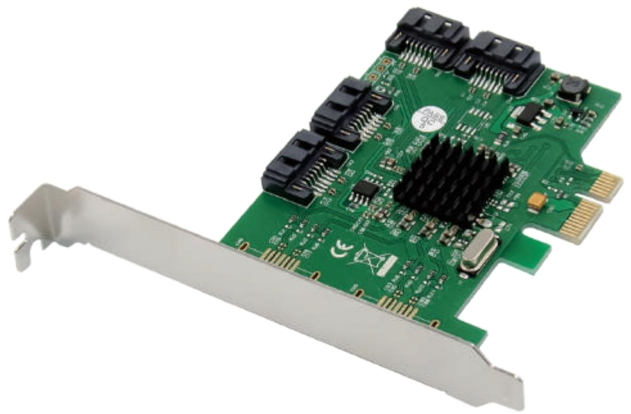

PCIe 2.0

PCIe x1 88SE9215 4-Port SATA 6Gbps Expansion Card

Chipset: Marvell 88SE9215 Interface: 4 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 95 x 69 mm(PCIe Board) Product weight: 39.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW56
PW539

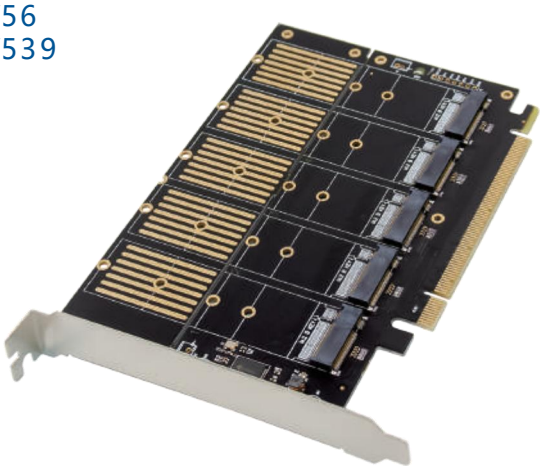

PCIex16 JMB585 5-M.2 B to 5-SATA Ⅲ Expansion Card

Chipset: JMicron JMB585 Interface: 5 x M.2 B Key 2280
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 170 x 105/57 mm(PCIe Board) Product weight: 78.2 g
Accessories: 1 x Low profile bracket, 1 x Screwdriver, 1 x Neutral box
5 x Screws, 5 x Heat sink, 5 x M.2 B to SATA Ⅲ Board

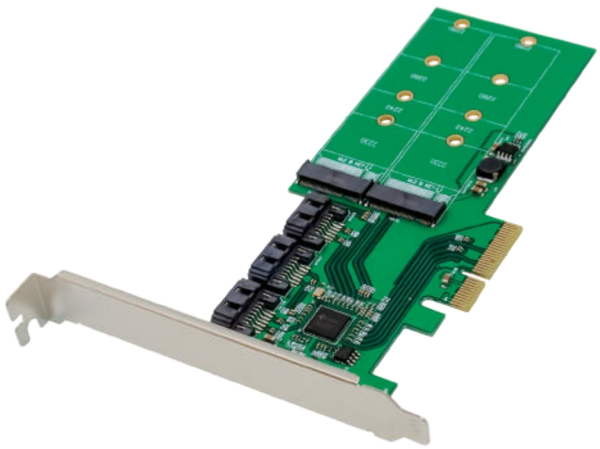

PCIex4 JMB585 M.2 B & SATA Ⅲ 6Gbps Expansion Card

Chipset: JMicron JMB585 Interface: 2 x M.2 B & 3 x SATA Ⅲ
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 155 x 69 mm(PCIe Board) Product weight: 56.3 g
Accessories: 1 x Low profile bracket, 1 x Screwdriver, 1 x Neutral box
2 x Heat sink, 2 x Screws

PW516
PW548

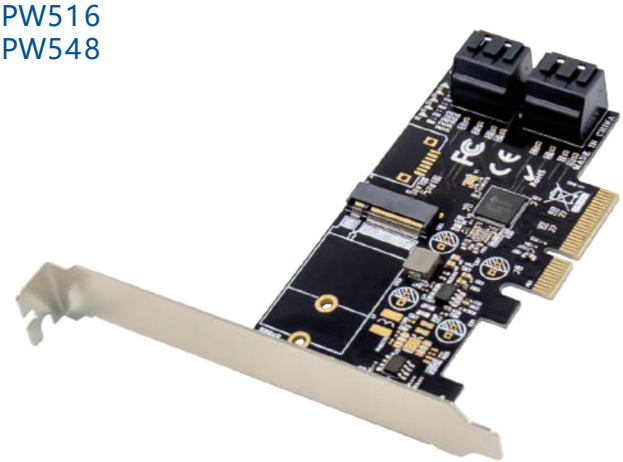

PCIe x4 JMB585 mSATA & SATA 6Gb/sExpansion Card

Chipset: JMicron JMB585 Interface: 1 x mSATA & 4 x SATA 3.0
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 103 x 58 mm(PCIe Board) Product weight: 41.3 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag, 1 x Neutral box 1 x Screwdriver, 1 x Screws

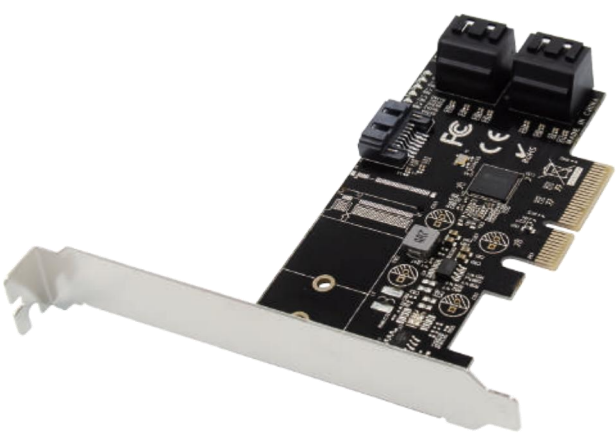

PCIex4 JMB585 5-Port SATA Ⅲ 6Gbps Expansion Card

Chipset: JMicron JMB585 Interface: 5 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 103 x 58 mm(PCIe Board) Product weight: 40 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag, 1 x Neutral box

PW543

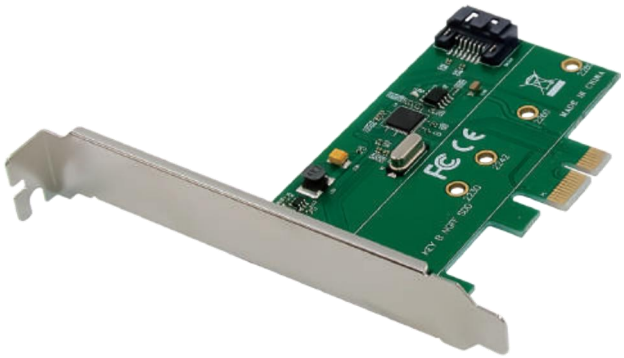

PCIe 2.0

PCIex1 ASM1061 M.2 B & SATA 6Gbps Expansion Card

Chipset: ASMedia ASM1061 Interface: 1 x M.2 B & 1 x SATA Ⅲ
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 88 x 45 mm(PCIe Board) Product weight: 32.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Screwdriver, 1 x Screws, 1 x Heat sink

PW58

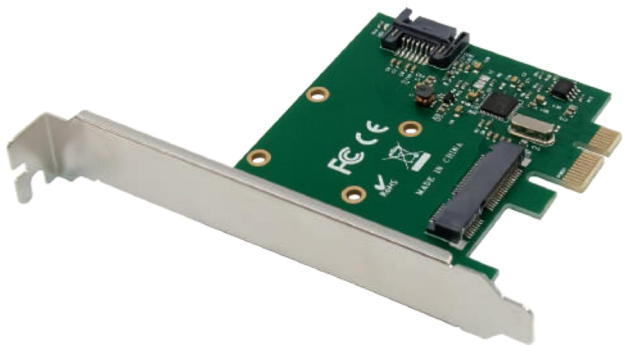

PCIe 2.0

PCIe x1 ASM1061 mSATA & SATA 6Gb/s Expansion Card

Chipset: ASMedia ASM1061 Interface: 1 x mSATA & 1 x SATA Ⅲ
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 78 x 69 mm(PCIe Board) Product weight: 76.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Screwdriver, 1 x Screws

PW550

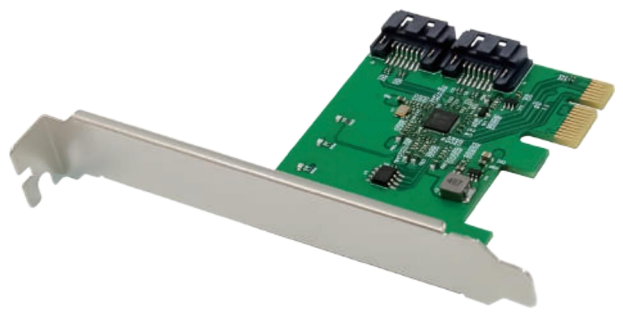

PCIe 3.1

PCIex1 JMB582 2-Port SATA Ⅲ 6Gbps Expansion Card

Chipset: JMicron JMB582 Interface: 2 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 95 x 67 mm(PCIe Board) Product weight: 33.7 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag, 1 x Neutral box

PW5108

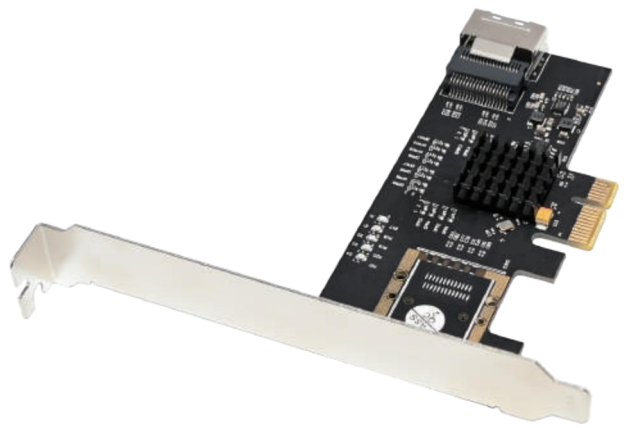

PCIe 2.0

PCIe x1 88SE9215 SAS to 4SATA 6Gb/s Expansion Card

Chipset: Marvell 88SE9215 Interface: 1 x SAS 36-pin Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 100 x 48 mm(PCIe Board) Product weight: 35.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x SAS 36-pin to 4-Port SATA Ⅲ cable: 50CM, 1 x Neutral box

PW5

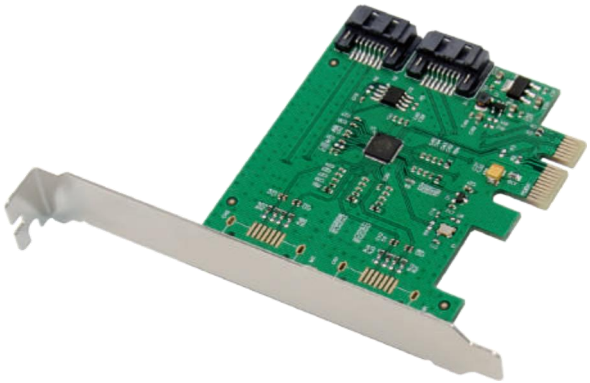

PCIe 2.0

PCIex1 88SE9170 2-Port SATA 6Gbps Expansion Card

Chipset: Marvell 88SE9170 Interface: 2 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 95 x 69 mm(PCIe Board) Product weight: 34.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW590



PCIe 2.0

PCIe x1 88SE9215 2-Port SATA 6Gbps Expansion Card

Chipset: Marvell 88SE9215 Interface: 2 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 72 x 67 mm(PCIe Board) Product weight: 34.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW544

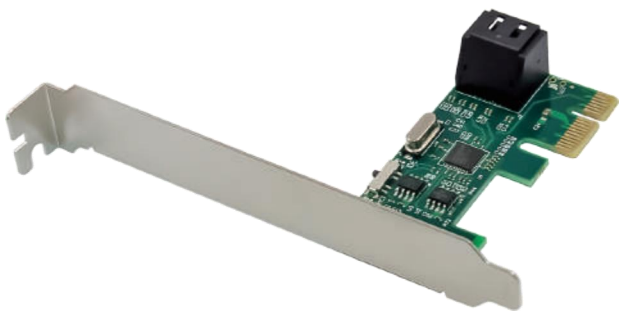

PCIe 2.0

PCIe x1 ASM1061 2-Port SATA Ⅲ 6Gb/s Expansion Card

Chipset: ASMedia ASM1061 Interface: 2 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 65 x 39 mm(PCIe Board) Product weight: 26.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW54

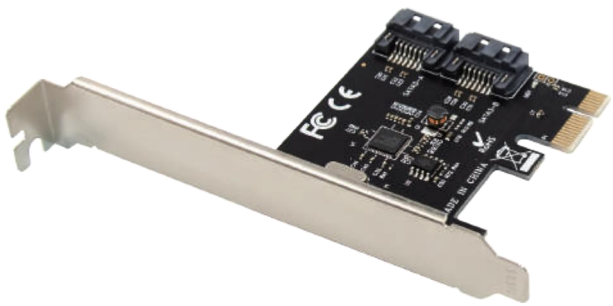

PCIe 2.0

PCIe x1 ASM1061 2-Port SATA Ⅲ 6Gb/s Expansion Card

Chipset: ASMedia ASM1061 Interface: 2 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 65 x 57 mm(PCIe Board) Product weight: 35.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW51

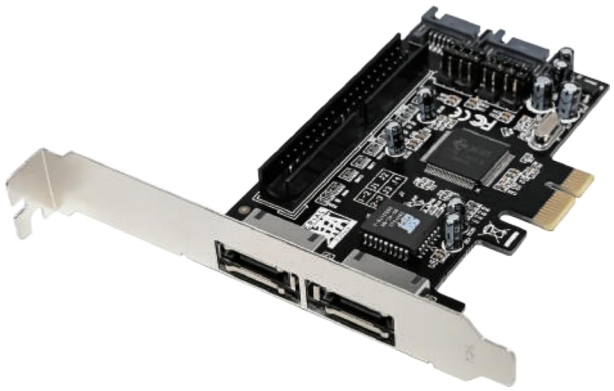

PCIe 1.0a

PCIex1 JMB363 2e2T SATA II 3Gbps + PATA RAID Card

Chipset: JMicron JMB363 Interface: 2eSATA & 1SATA Ⅱ + 1 x PATA
Data Transfer Rate: transmission speeds up to 3Gbps

Dimension: 97 x 69 mm(PCIe Board) Product weight: 48.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW5102

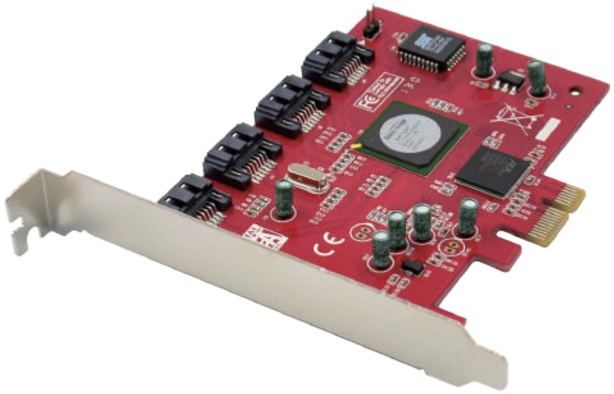

PCIe 1.0a

PCIe x1 Sil3124 4- SATA Ⅱ 3Gbps RAID Expansion Card

Chipset: Silicon Image SIL3124 Interface: 4 x SATA Gen2 Port
Data Transfer Rate: transmission speeds up to 3Gbps

Dimension: x mm(PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW51



PCIe 1.0a

PCIex1 Sil3132 2e2T SATA 3Gb/s RAID Expansion Card

Chipset: Silicon Image SIL3132 Interface: 2 x eSATA & 2 x SATA Ⅱ
Data Transfer Rate: transmission speeds up to 3Gbps

Dimension: 67 x 68 mm(PCIe Board) Product weight: 42.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW51

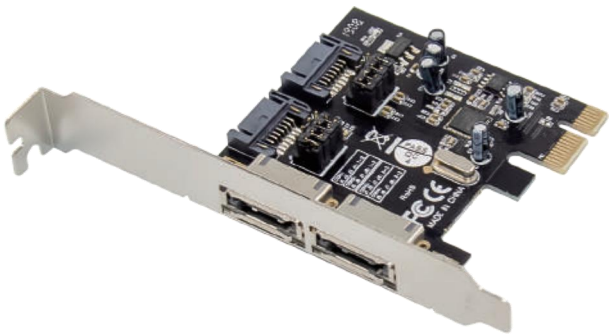

PCIe 2.0

PCIex1 ASM1061 2e2T SATA Ⅲ 6Gb/s Expansion Card

Chipset: ASMedia ASM1061 Interface: 2 x eSATA & 2 x SATA Ⅲ
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 67 x 68 mm(PCIe Board) Product weight: 40.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW513

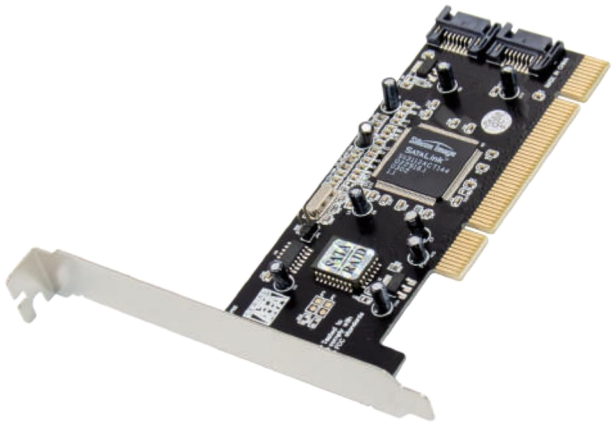

PCI 32-bit 33MHz

PCI Sil3112 2-Port SATA 1.5Gbps RAID Expansion Card

Chipset: Silicon Image SIL3112 Interface: 2 x SATA Gen1 Port
Data Transfer Rate: transmission speeds up to 1.5Gbps

Dimension: 120 x 50 mm(PCI Board) Product weight: 37.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW514

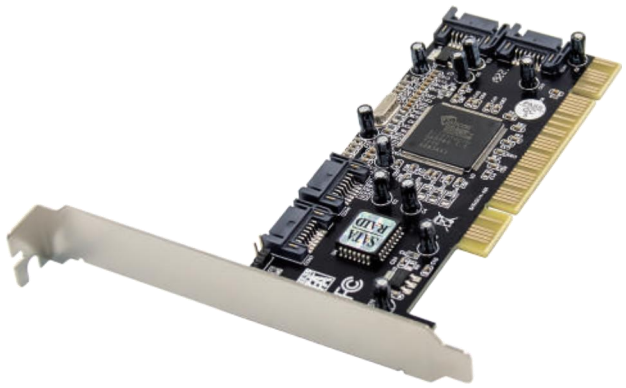

PCI 32-bit 33MHz

PCI Sil3114 4-Port SATA 1.5Gbps RAID Expansion Card

Chipset: Silicon Image SIL3114 Interface: 4 x SATA Gen2 Port
Data Transfer Rate: transmission speeds up to 3Gbps

Dimension: 120 x 50 mm(PCI Board) Product weight: 45.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW512



PCI 32-bit 33MHz

PCI Sil3124 4-Port SATA Ⅱ 3Gbps RAID Expansion Card

Chipset: Silicon Image SIL3124 Interface: 4 x SATA Gen2 Port
Data Transfer Rate: transmission speeds up to 3Gbps

Dimension: 122 x 60 mm(PCIe Board) Product weight: 43.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

PW515

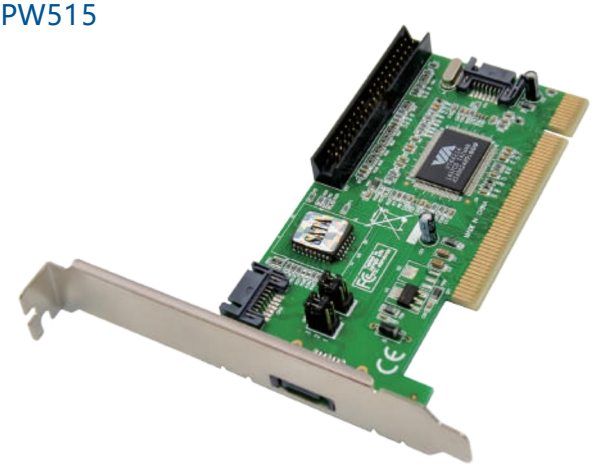

PCI 32-bit 33MHz

PCI VT6421A 1e2T SATA Ⅰ + PATA RAID Expansion Card

Chipset: VIA VT6421A Interface: 1eSATA&2SATA Ⅰ + 1 x PATA
Data Transfer Rate: transmission speeds up to 1.5Gbps

Dimension: 120 x 58 mm(PCI Board) Product weight: 49.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Anti-PWatic bag 1 x Neutral box

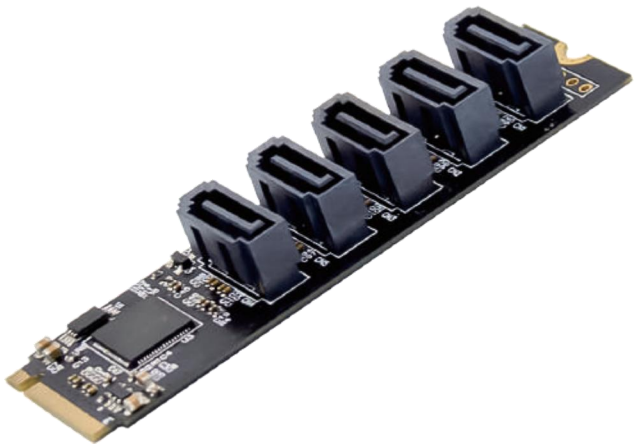

M.2 MJMB585 5-Port SATA Ⅲ 6Gbps Expansion Card

Chipset: JMicron JMB585 Interface: 5 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 8.3 g
Accessories: 1 x Screwdriver, 1 x Screws, 1 x Anti-PWatic bag
1 x Neutral box

PW532

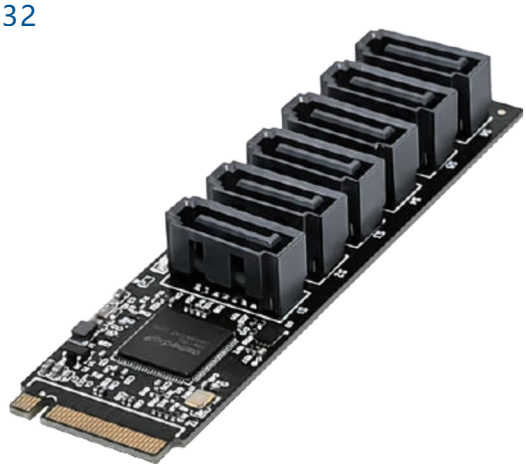

M.2 MASM1166 6-Port SATA Ⅲ 6Gbps Expansion Card

Chipset: ASMedia ASM1166 Interface: 6 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 10.3 g
Accessories: 1 x Screwdriver, 1 x Screws, 1 x Anti-PWatic bag
1 x CD-Driver, 1 x Neutral box

PW577



PCI 32-bit 33MHz

MiniPCIE 88SE9215 SAS to SATA 6Gb/s Expansion Card

Chipset: Marvell 88SE9215 Interface: 1 x SAS 36-pin Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 53.3 g
Accessories: 1 x Screwdriver, 1 x Screws, 1 x CD-Driver, 1 x Neutral box
1 x SAS 36-pin to 4-Port SATA Ⅲ cable: 50CM

PW510



PCI 32-bit 33MHz

M.2 B+MJMB575 5-Port SATA 6Gbps Expansion Card

Chipset: JMicron JMB575 Interface: 5 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 8.3 g
Accessories: 1 x Screwdriver, 1 x Screws, 1 x Anti-PWatic bag
1 x Neutral box

PW57

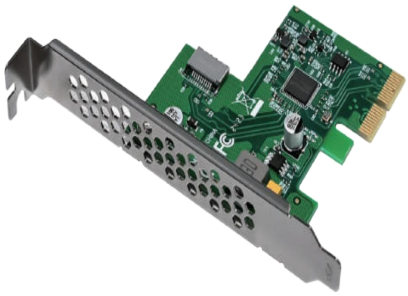

M.2 B+M 88SE9230 4-Port SATA Ⅲ 6Gbps RAID Card

Chipset: Marvell 88SE9230 Interface: 4 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 22 x 42 mm(M.2 Board) Product weight: 7.3 g
Accessories: 1 x Screwdriver, 1 x Screws, 1 x Anti-PWatic bag
1 x CD-Driver, 1 x Neutral box

PW579

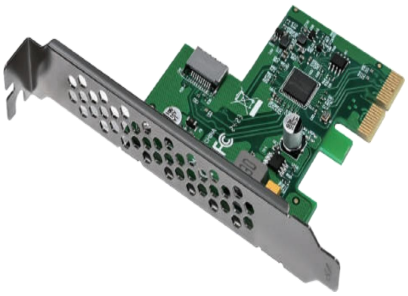

M.2 B+M 88SE9215 4-Port SATA 6Gb/s Expansion Card

Chipset: Marvell 88SE9215 Interface: 4 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 22 x 42 mm(M.2 Board) Product weight: 7.3 g
Accessories: 1 x Screwdriver, 1 x Screws, 1 x Anti-PWatic bag
1 x CD-Driver, 1 x Neutral box

PW54

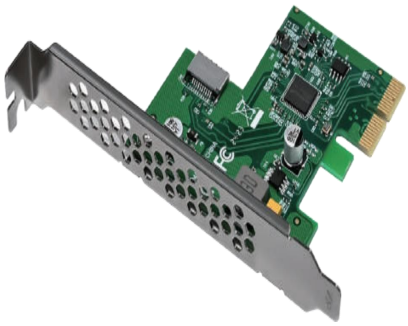

MiniPCIE 88SE9215 4-Port SATA 6Gb/s Expansion Card

Chipset: Marvell 88SE9215 Interface: 4 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 8.3 g
Accessories: 1 x Screwdriver, 1 x Screws, 1 x Anti-PWatic bag
1 x CD-Driver, 1 x Neutral box

PW586

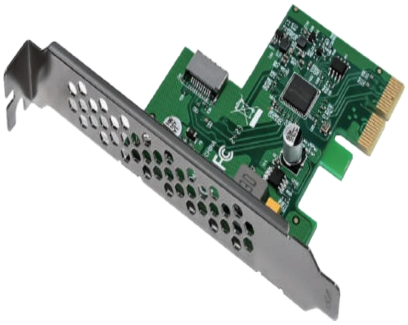

MiniPCIE 88SE9230 4-Port SATA Ⅲ 6Gbps RAID Card

Chipset: Marvell 88SE9230 Interface: 4 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 8.3 g
Accessories: 1 x Screwdriver, 1 x Screws, 1 x Anti-PWatic bag
1 x CD-Driver, 1 x Neutral box

PW55



M.2 B+MJMB585 1-SAS to 4-SATA Ⅲ Expansion Card

Chipset: JMicron JMB585 Interface: 4 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 22 x 42 mm(M.2 Board) Product weight: 51.8 g
Accessories: 1 x Screwdriver, 1 x Screws, 1 x Anti-PWatic bag
1 x SAS 36-pin to 4-Port SATA Ⅲ cable: 100CM, 1 x Neutral box

PW559



M.2 B+MJMB585 2-SAS to 8-SATA Ⅲ Expansion Card

Chipset: JMB585 + JMB575 Interface: 8 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 103 g
Accessories: 1 x Screwdriver, 1 x Screws, 1 x Anti-PWatic bag
2 x SAS 36-pin to 4-Port SATA Ⅲ cable: 100CM, 1 x Neutral box

PW58



M.2 A+EJMB582 2-Port SATA Ⅲ 6Gbps Expansion Card

Chipset: JMicron JMB582 Interface: 2 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 22 x 80 mm(M.2 Board) Product weight: 7.5 g
Accessories: 1 x Screwdriver, 1 x Screws, 1 x Anti-PWatic bag
1 x Neutral box

PW582



MiniPCIE JMB582 2-Port SATA Ⅲ 6Gbps Expansion Card

Chipset: JMicron JMB582 Interface: 2 x SATA Gen3 Port
Data Transfer Rate: transmission speeds up to 6Gbps

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 6.3 g
Accessories: 1 x Screwdriver, 1 x Screws, 1 x Anti-PWatic bag
1 x Neutral box

PW695
PW694



PCIex16 ASM3242 USB3.2 8CH 8C Vision Capture Card

Chipset: ASM3242+PEX8747 Interface Type: 8 x USB3.2-C
Data Rate Per Port: Up to USB3.2 Gen2 x2 20Gbps
Power Supply: ATX 6-pin power connector

Dimension: 128 x 110 mm(PCIe Board) Product weight: 263.7 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box



PCIex16 ASM3142 USB3.2 4CH 8C Vision Capture Card

Chipset: ASM3142+PEX8747 Interface Type: 8 x USB3.2-C
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps
Power Supply: ATX 6-pin power connector

Dimension: 128 x 110 mm(PCIe Board) Product weight: 251.1 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW691
PW690



PCIex16 ASM3242 USB3.2 4CH 4C Vision Capture Card

Chipset: ASM3242+PEX8747 Interface Type: 4 x USB3.2-C
Data Rate Per Port: Up to USB3.2 Gen2 x2 20Gbps
Power Supply: ATX 6-pin power connector

Dimension: 143 x 69 mm(PCIe Board) Product weight: 182.8 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag, 1 x Neutral box



PCIex16 ASM3242 USB3.2 2CH 2C Vision Capture Card

Chipset: ASM3242+PEX8747 Interface Type: 2 x USB3.2-C
Data Rate Per Port: Up to USB3.2 Gen2 x2 20Gbps
Power Supply: ATX 6-pin power connector

Dimension: 143 x 69 mm(PCIe Board) Product weight: 180.9 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag, 1 x Neutral box

PW6109
PW6110



PCIex16 ASM3242 USB3.2 8CH 8A Vision Capture Card

Chipset: ASM3242+PEX8747 Interface Type: 8 x USB3.2-A
Data Rate Per Port: Up to USB3.2 Gen2 x2 20Gbps
Power Supply: ATX 6-pin power connector

Dimension: 128 x 110 mm(PCIe Board) Product weight: 263.7 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box



PCIex16 ASM3142 USB3.2 4CH 8A Vision Capture Card

Chipset: ASM3142+PEX8747 Interface Type: 8 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps
Power Supply: ATX 6-pin power connector

Dimension: 128 x 110 mm(PCIe Board) Product weight: 251.1 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW6111
PW6112



PCIex8 ASM3142 USB3.2 4CH 4A Vision Capture Card

Chipset: ASM3142+PEX8747 Interface Type: 4 x USB3.2-A
Data Rate Per Port: Up to USB3.2 Gen2 10Gbps
Power Supply: ATX 6-pin power connector

Dimension: 144 x 69 mm(PCIe Board) Product weight: 181.6 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag, 1 x Neutral box



PCIe x16 FL1100 USB 3.2 8CH 8A Vision Capture Card

Chipset: FL1100+PI7C9X2G608P Interface Type: 8 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: Self-powered

Dimension: 143 x 69 mm(PCIe Board) Product weight: 180.9 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag, 1 x Neutral box

PW693
PW658



PCIex8 ASM3142 USB3.2 4CH 4C Vision Capture Card

Chipset: ASM3142+PEX8747 Interface Type: 4 x USB3.2-C
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps
Power Supply: ATX 6-pin power ponnector

Dimension: 143 x 69 mm(PCIe Board) Product weight: 177.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box



PCIe x4 ASM3142 USB3.2 2CH 4A Vision Capture Card

Chipset: ASM3142+ASM2812 Interface Type: 4 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps
Power Supply: Self-powered

Dimension: 160 x 67 mm(PCIe Board) Product weight: 92.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW665
PW6108

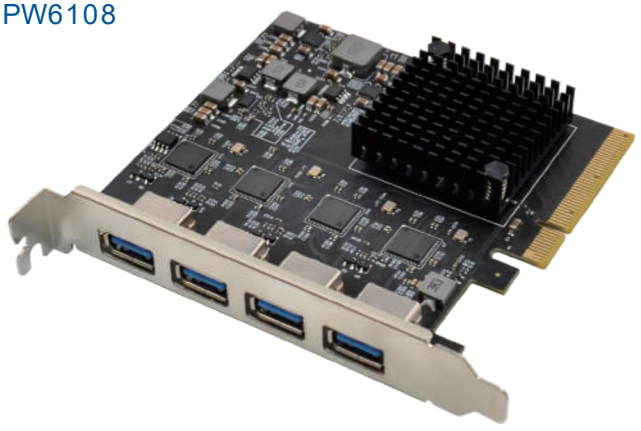

PCIe x8 ASM3142 USB3.2 4CH 4A Vision Capture Card

Chipset: ASM3142+PEX8747 Interface Type: 4 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps
Power Supply: Self-powered

Dimension: 95 x 103 mm(PCIe Board) Product weight: 89.8 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

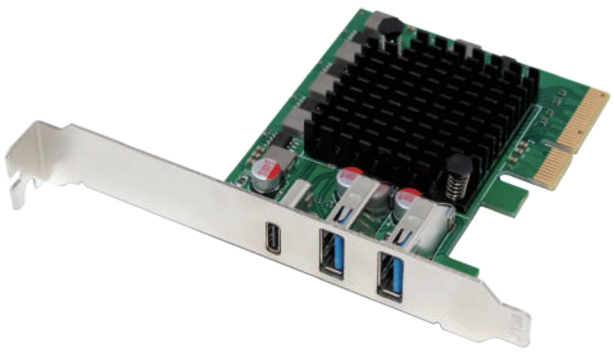

PCIe x4 ASM3242 USB 3.2 2A1C Vision Capture Card

Chipset: ASMedia ASM3242 + Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen2 x2 20Gbps 1 x USB3.2-C
Power Supply: Self-powered

Dimension: 79 x 66 mm(PCIe Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag, 1 x Neutral box

PW613
PW616



PCIe x4 D720202 USB3.2 2CH 4A Vision Capture Card

Chipset: D720202+ASM1806 Interface Type: 4 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: Self-powered

Dimension: 115 x 60 mm(PCIe Board) Product weight: 63.4 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag, 1 x Neutral box



PCIe x4 D720202 USB3.2 4CH 4A Vision Capture Card

Chipset: D720202+PI7C9X2G608P Interface Type: 4 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: 4-pin D-sub/SATA 15-pin power connector

Dimension: 167 x 69 mm(PCIe Board) Product weight: 82,8 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag, 1 x Neutral box

PW647

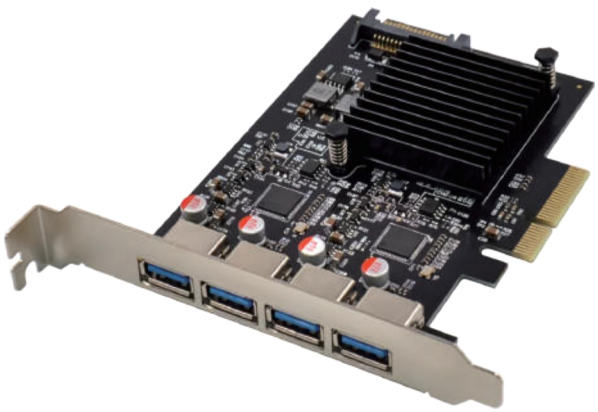

PCIe 3.0

PCIe x4 ASM3142 4 Port USB3.2-A Vision Capture Card

Chipset: ASM3142+ASM2806 Interface Type: 4 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps
Power Supply: SATA 15-pin power connector

Dimension: 100 x 85 mm(PCIe Board) Product weight: 79.7 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW648



PCIe 3.0

PCIe x4 ASM3142 USB3.2 2A2C Vision Capture Card

Chipset: ASM3142 + ASM2812 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps 2 x USB3.2-C
Power Supply: SATA 15-pin power connector

Dimension: 100 x 85 mm(PCIe Board) Product weight: 76 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW668
PW676

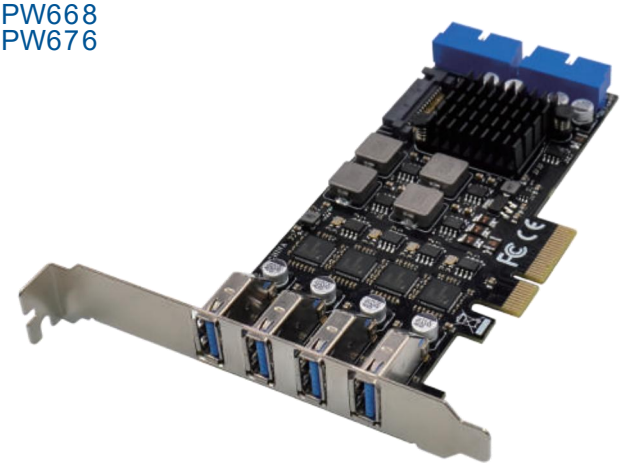

PCIe x4 D720201 USB3.2 4CH 8A Vision Capture Card

Chipset: D720201+ASM2806 Interface Type: 4 x USB3.2-A
Data Transfer Rate: up to 5Gbps 2 x USB3.0 19-pin Front Port
Power Supply: SATA 15-pin power connector

Dimension: 135 x 67 mm(PCIe Board) Product weight: 83.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

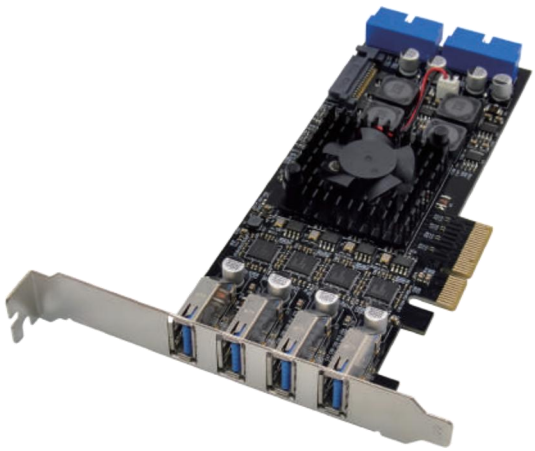

PCIe x4 D720202 USB3.2 4CH 8A Vision Capture Card

Chipset: D720201+ASM1812 Interface Type: 4 x USB3.2-A
Data Transfer Rate: up to 5Gbps 2 x USB3.2 19-pin Front Port
Power Supply: SATA 15-pin power connector

Dimension: 155 x 67 mm(PCIe Board) Product weight: 105.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW63

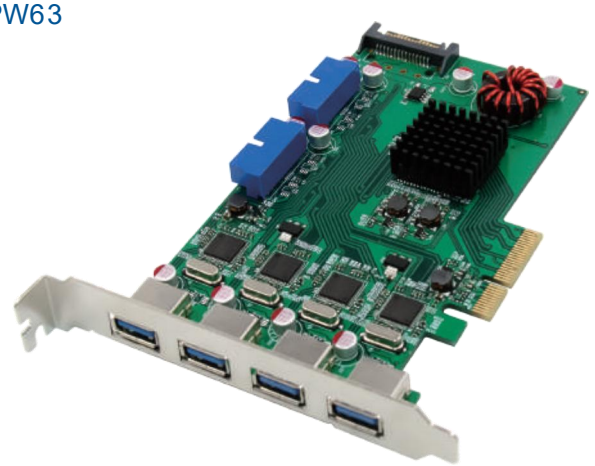

PCIe 2.0

PCIe x4 ASM1042A USB3.2 4CH 8A Vision Capture Card

Chipset: ASM1042A+PI7C9X2G608P Interface Type: 4 x USB3.2-A
Data Transfer Rate: up to 5Gbps 2 x USB3.2 19-pin Front Port
Power Supply: SATA 15-pin power connector

Dimension: 143 x 86 mm(PCIe Board) Product weight: 84.5 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW660



PCIe 2.0

PCIe x4 D720201 USB3.2 4CH 8A Vision Capture Card

Chipset: D720201+ASM2806 Interface Type: 4 x USB3.2-A
Data Transfer Rate: up to 5Gbps 2 x USB3.2 19-pin Front Port
Power Supply: ATX 6-pin power connector

Dimension: 141 x 104 mm(PCIe Board) Product weight: 104 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW626
PW6103

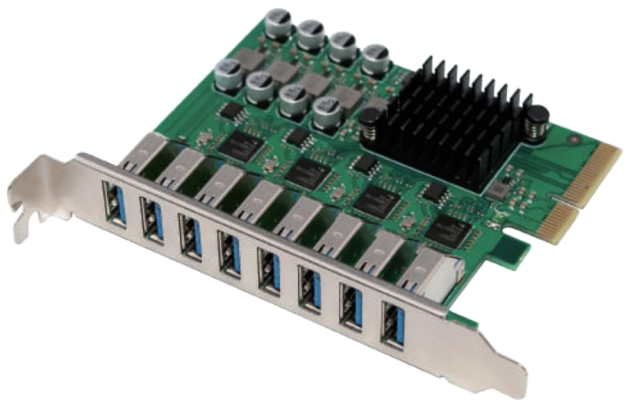

PCIe x4 D720201 USB 3.2 4CH 8A Vision Capture Card

Chipset: D720201+ASM2806 Interface Type: 8 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: Self-powered

Dimension: 79 x 97 mm(PCIe Board) Product weight: 84.6 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

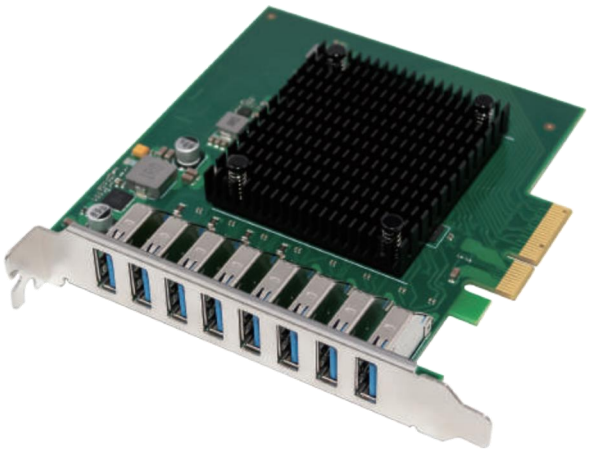

PCIe x4 FL1100 USB3.2 4CH 8A 5G Vision Capture Card

Chipset: FL1100+PI7C9X2G608P Interface Type: 8 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: Self-powered

Dimension: 117 x 111 mm(PCIe Board) Product weight: 84.5 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW66

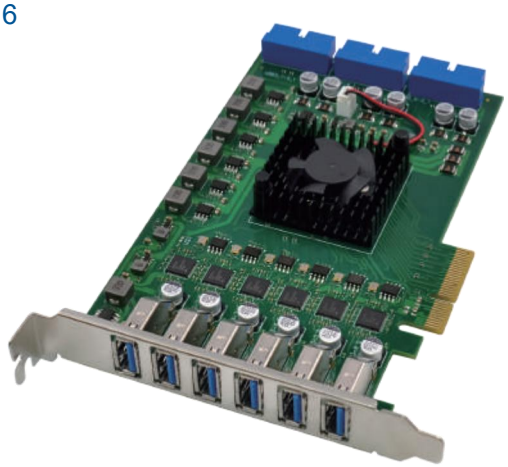

PCIe 2.0

PCIe x4 D720202 USB3.2 6CH 12A Vision Capture Card

Chipset: D720202+ASM1812 Interface Type: 6 x USB3.2-A
Data Transfer Rate: up to 5Gbps 3 x USB3.2 19-pin Front Port
Power Supply: Self-powered

Dimension: 155 x 98 mm(PCIe Board) Product weight: 127.3 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW610

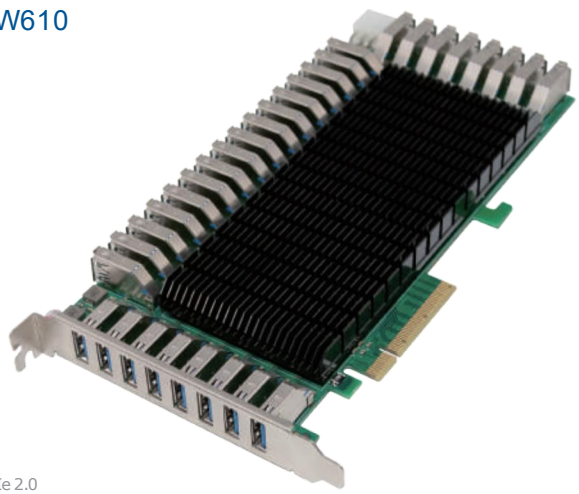

PCIe 2.0

PCIe x8 D720201 USB3.2 8CH 32A Vision Capture Card

Chipset: D720201+ASM1806 Interface Type: 8 x Ext. USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps 24 x Int. USB3.2-A
Power Supply: ATX 6-pin power connector

Dimension: 216 x 106 mm(PCIe Board) Product weight: 358.6 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW680
PW678



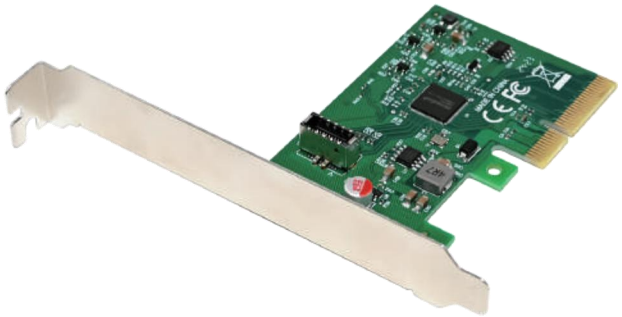

PCIex4 ASM3242 1-USB3.2-C 20Gbps Expansion Card

Chipset: ASMedia ASM3242 Interface Type: 1 x USB3.2-C
Data Rate Per Port: Up to USB3.2 Gen2 x2 20Gbps
Power Supply: Self-powered

Dimension: 79 x 51 mm(PCIe Board) Product weight: 30.8 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag, 1 x Neutral box

PCIex4 ASM3242 1-USB3.2-E 20Gbps Expansion Card

Chipset: ASMedia ASM3242 Interface Type: 1 x USB3.2-E
Data Rate Per Port: Up to USB3.2 Gen2 x2 20Gbps
Power Supply: Self-powered

Dimension: 79 x 51 mm(PCIe Board) Product weight: 33.4 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag, 1 x Neutral box

PW659
PW686

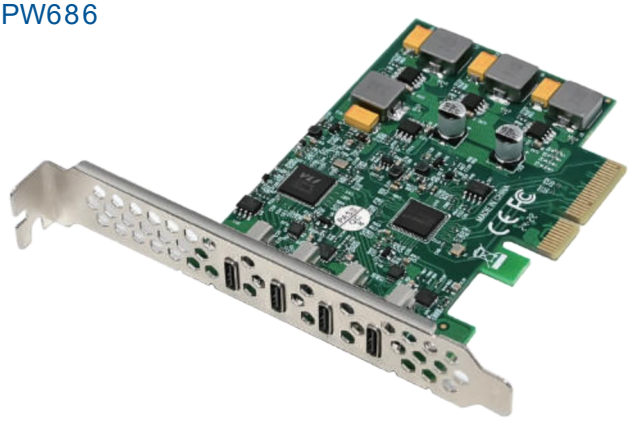



PCIe x4 ASM3142 4-USB3.2-C 10Gbps Expansion Card

Chipset: ASM3142+VL820 Interface Type: 4 x USB3.2-C
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps
Power Supply: Self-powered

Dimension: 98 x 69 mm(PCIe Board) Product weight: 59.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PCIex4 ASM3042 4CH 5Gbps USB3.2 Expansion Card

Chipset: ASM3042+ASM1806 Interface Type: 4 x USB3.2-A
Data Rate Per Port: Up to USB3.2 Gen1 x1 5Gbps
Power Supply: SATA 15-pin power connector

Dimension: 148 x 67 mm(PCIe Board) Product weight: 81.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW688



PCIe 3.0, USB-C port support PD3.0 charge function max 30W

PCIex4 ASM3142 USB3.2 A+C&PD3.0 Expansion Card

Chipset: ASMedia ASM3142 Interface Type: 1 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps 1 x USB3.2-C
Power Supply: ATX 6-pin power connector

Dimension: 128 x 110 mm(PCIe Board) Product weight: 263.7 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW682



PCIe 3.0

PCIe x4 ASM3142 USB3.2 3A2C 10Gbps Expansion Card

Chipset: ASM3142+VL820 Interface Type: 3 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps 2 x USB3.2-C
Power Supply: Self-powered

Dimension: 86 x 98 mm(PCIe Board) Product weight: 70 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW653

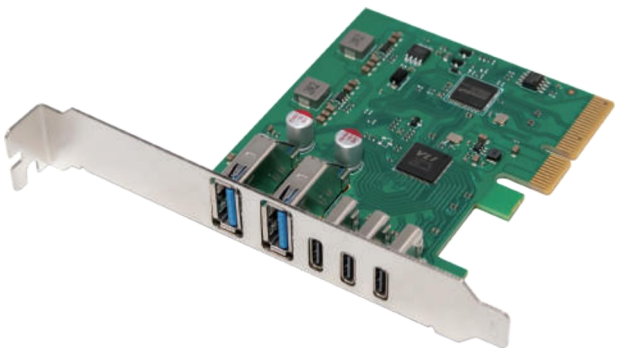

PCIe 3.0

PCIex4 ASM3142 USB3.2 2A3C 10Gbps Expansion Card

Chipset: ASM3142+VL820 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps 3 x USB3.2-C
Power Supply: Self-powered

Dimension: 79 x 69 mm(PCIe Board) Product weight: 50.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW654

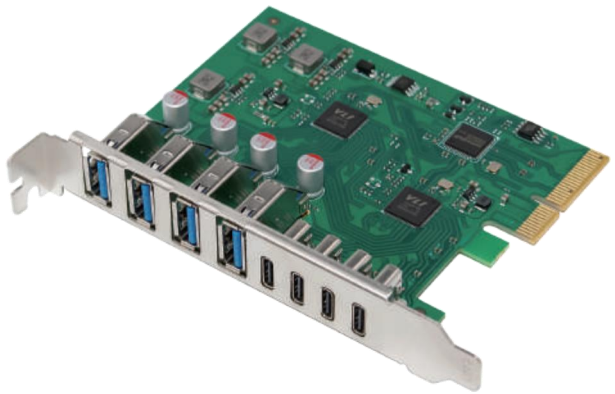

PCIe 3.0

PCIe x4 ASM3142 USB3.2 4A4C 10Gbps Expansion Card

Chipset: ASM3142+VL820 Interface Type: 4 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps 4 x USB3.2-C
Power Supply: Self-powered

Dimension: 79 x 100 mm(PCIe Board) Product weight: 69.7 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW67



PCIe 3.0

PCIex2 ASM3142 1-USB3.2-E 10Gbps Expansion Card

Chipset: ASMedia ASM3142 Interface Type: 1 x USB3.2-E
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps
Power Supply: Self-powered

Dimension: 70 x 67 mm(PCIe Board) Product weight: 32.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW677



PCIe 2.0

PCIe x2 ASM1142 1-USB3.2-E 10Gbps Expansion Card

Chipset: ASMedia ASM1142 Interface Type: 1 x USB3.2-E
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps
Power Supply: Self-powered

Dimension: 70 x 67 mm(PCIe Board) Product weight: 32.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW637

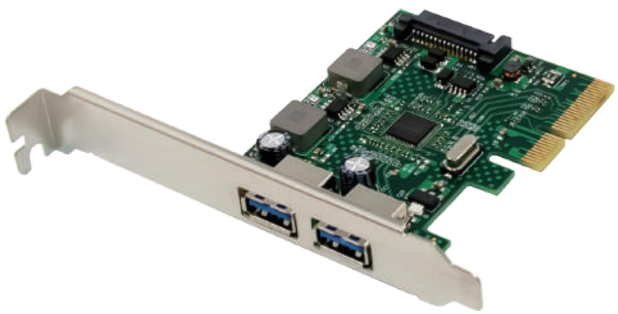

PCIe 3.0

PCIex4 ASM3142 2-USB3.2-A 10Gbps Expansion Card

Chipset: ASMedia ASM3142 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps
Power Supply: SATA 15-pin power connector

Dimension: 80 x 63 mm(PCIe Board) Product weight: 44.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW63

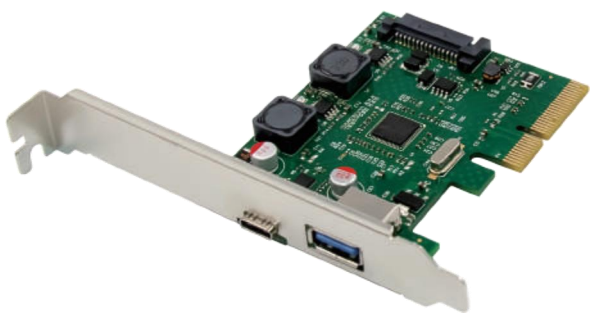

PCIe 3.0

PCIe x4 ASM3142 USB3.2 C+A 10Gbps Expansion Card

Chipset: ASMedia ASM3142 Interface Type: 1 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps 1 x USB3.2-C
Power Supply: SATA 15-pin power connector

Dimension: 80 x 63 mm(PCIe Board) Product weight: 42.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW62

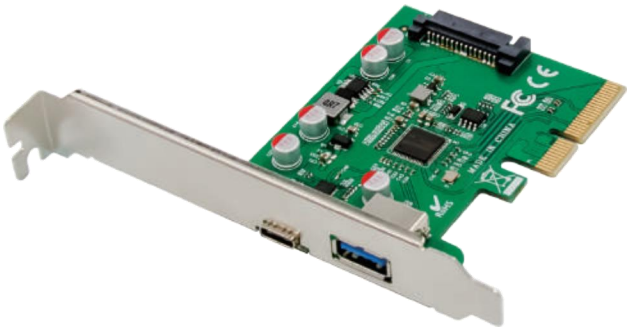

PCIe 2.0

PCIex4 ASM1142 USB3.2 C+A 10Gbps Expansion Card

Chipset: ASMedia ASM1142 Interface Type: 1 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps 1 x USB3.2-C
Power Supply: SATA 15-pin power connector

Dimension: 80 x 58 mm(PCIe Board) Product weight: 48.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW631



PCIe 2.0

PCIex4 ASM1142 2-USB3.2-C 10Gbps Expansion Card

Chipset: ASMedia ASM1142 Interface Type: 2 x USB3.2-C
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps
Power Supply: Self-powered

Dimension: 80 x 58 mm(PCIe Board) Product weight: 38.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW61

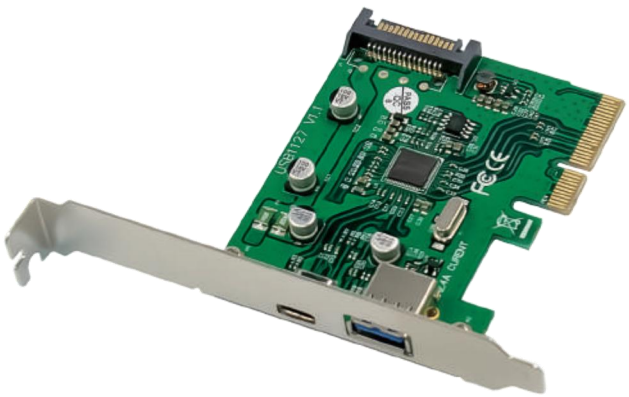

PCIe 2.0

PCIex4 ASM1142 USB3.2 C+A 10Gbps Expansion Card

Chipset: ASMedia ASM1142 Interface Type: 1 x USB3.2-C
Data Transfer Rate: Up to 10Gbps 1 x USB3.2-A(Change Port)
Power Supply: SATA 15-pin power connector

Dimension: 80 x 58 mm(PCIe Board) Product weight: 31.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW619

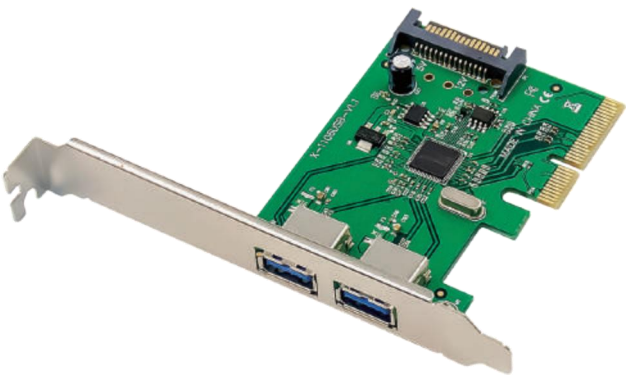

PCIe 2.0

PCIex4 ASM1142 2-USB3.2-A 10Gbps Expansion Card

Chipset: ASMedia ASM1142 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps
Power Supply: SATA 15-pin power connector

Dimension: 80 x 58 mm(PCIe Board) Product weight: 35 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW61

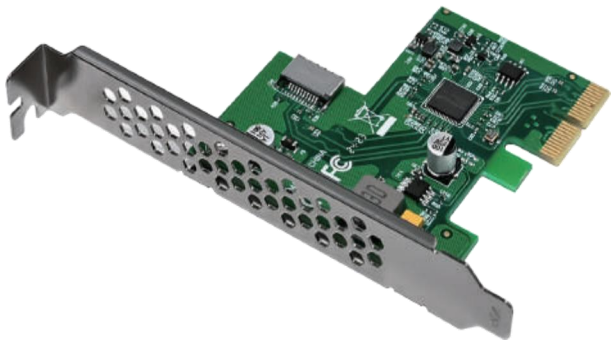

PCIe 2.0

PCIex4 ASM1142 2-USB3.2-C 10Gbps Expansion Card

Chipset: ASMedia ASM1142 Interface Type: 2 x USB3.2-C
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps
Power Supply: SATA 15-pin power connector

Dimension: 80 x 58 mm(PCIe Board) Product weight: 31.8g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW683

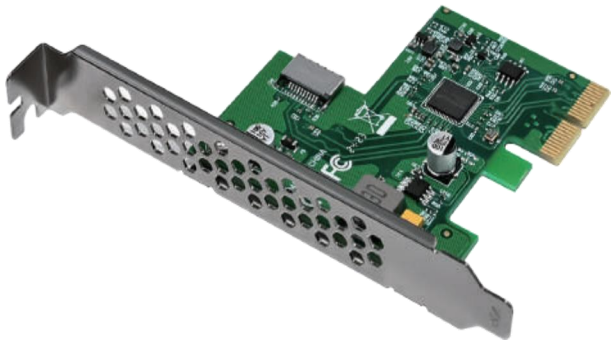

PCIe 3.0

PCIe x4 ASM3142 2-USB3.2-C 10Gbps Expansion Card

Chipset: ASMedia ASM3142 Interface Type: 2 x USB3.2-C
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps
Power Supply: SATA 15-pin power connector

Dimension: 80 x 58 mm(PCIe Board) Product weight: 31.8g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW610

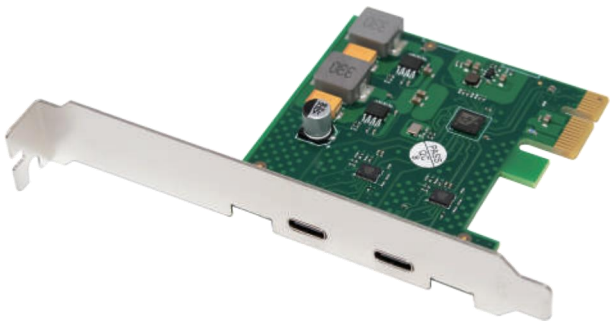

PCIe 2.0

PCIe x1 FL1100 2-Port USB3.2-C 5Gbps Expansion Card

Chipset: Parade FL1100 Interface Type: 2 x USB3.2-C
Data Transfer Rate: Up to USB 3.2 Gen1 5Gbps
Power Supply: Self-powered

Dimension: 65 x 64 mm(PCIe Board) Product weight: 37.1 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW6106



PCIe 2.0

PCIe x1 FL1100 USB3.2 Type C+A 5Gbps Expansion Card

Chipset: Parade FL1100 Interface Type: 1 x USB3.2-A
Data Transfer Rate: Up to USB 3.2 Gen1 5Gbps 1 x USB3.2-C
Power Supply: Self-powered

Dimension: 65 x 64 mm(PCIe Board) Product weight: 40.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW6107



PCIe 2.0

PCIe x1 FL1100 2-Port USB3.2 A 5Gbps Expansion Card

Chipset: Parade FL1100 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: Self-powered

Dimension: 65 x 64 mm(PCIe Board) Product weight: 42 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW61



PCIe 2.0

PCIe x1 ASM1042A 2-USB3.2 A 5Gbps Expansion Card

Chipset: ASMedia ASM1042A Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: 4-pin D-sub power connector

Dimension: 65 x 60 mm(PCIe Board) Product weight: 35.4 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW63



PCIe 2.0

PCIe x1 ASM1042A 2-USB3.2 A 5Gbps Expansion Card

Chipset: ASMedia ASM1042A Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: Self-powered

Dimension: 65 x 60 mm(PCIe Board) Product weight: 36.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW624

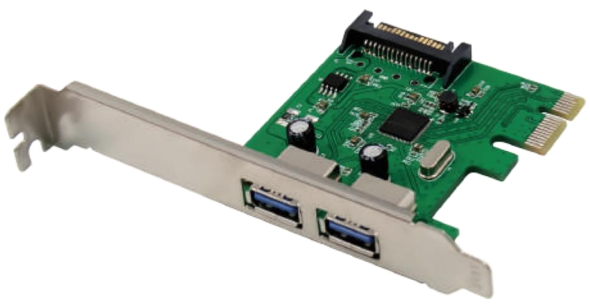

PCIe 2.0

PCIex1 ASM1042A 2-USB3.2 A 5Gbps Expansion Card

Chipset: ASMedia ASM1042A Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: SATA 15-pin power connector

Dimension: 65 x 60 mm(PCIe Board) Product weight: 35.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW69

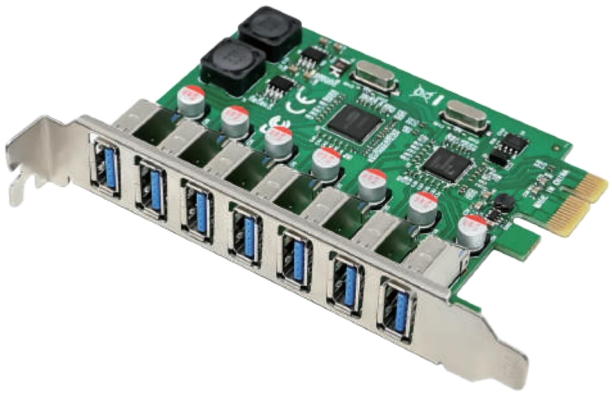

PCIe 2.0

PCIe x1 D720201 7-Port USB3.2 5Gbps Expansion Card

Chipset: D720201+D720210 Interface Type: 7 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: Self-powered

Dimension: 72 x 98 mm(PCIe Board) Product weight: 71.6 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW673

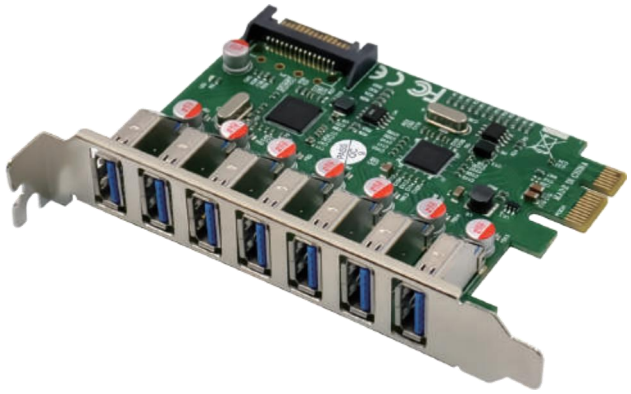

PCIe 2.0

PCIe x1 D720201 7-Port USB3.2 5Gbps Expansion Card

Chipset: D720201+VL812 Interface Type: 7 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: SATA 15-pin power connector

Dimension: 75 x 110 mm(PCIe Board) Product weight: 83.4 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW635

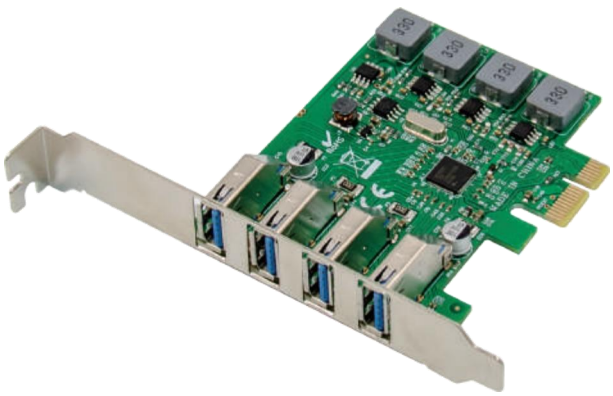

PCIe 2.0

PCIe x1 D720201 4-Port USB3.2 5Gbps Expansion Card

Chipset: Renesas D720201 Interface Type: 4 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: Self-powered

Dimension: 82 x 68 mm(PCIe Board) Product weight: 58.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW68

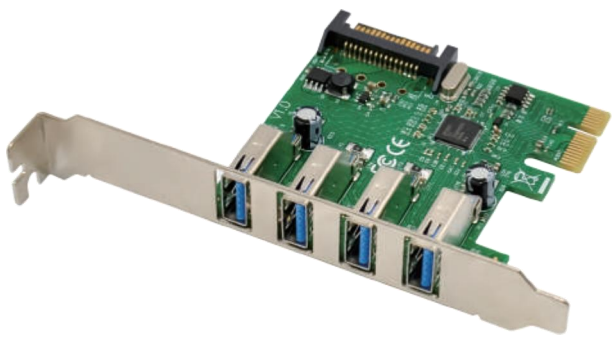

PCIe 2.0

PCIe x1 D720201 4-Port USB3.2 5Gbps Expansion Card

Chipset: Renesas D720201 Interface Type: 4 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: SATA 15-pin power connector

Dimension: 68 x 65 mm(PCIe Board) Product weight: 34.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW62



PCIe 2.0

PCIex1 VL805 USB 3.2 2A1C 5Gbps Expansion Card

Chipset: VIA Lab's VL805 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps 1 x USB3.2-C
Power Supply: SATA 15-pin power connector

Dimension: 66 x 68 mm(PCIe Board) Product weight: 39.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW632

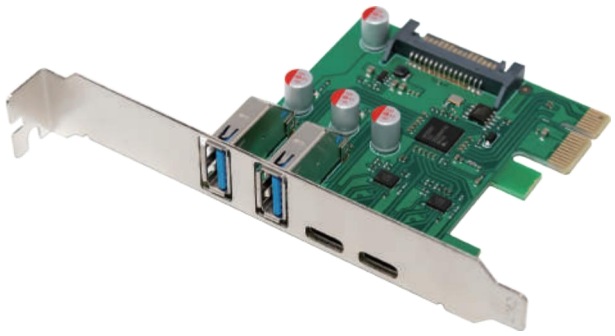

PCIe 2.0

PCIe x1 D720201 USB3.2 2A2C 5Gbps Expansion Card

Chipset: Renesas D720201 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps 2 x USB3.2-C
Power Supply: SATA 15-pin power connector

Dimension: 64 x 65 mm(PCIe Board) Product weight: 39 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW61

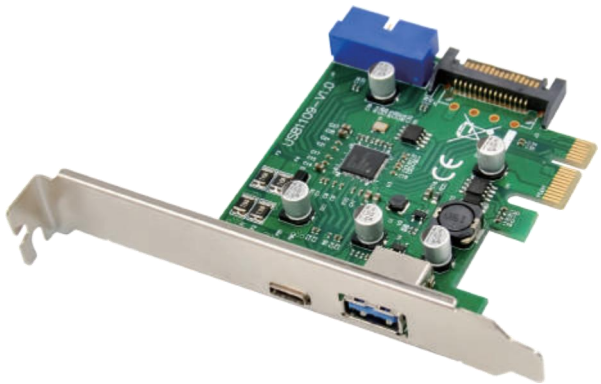

PCIe 2.0

PCIex1 D720201 USB3.2 C+A(2.4A)5G Expansion Card

Chipset: Renesas D720201 Interface Type: 1 x USB3.2 C&A
Data Transfer Rate: Up to 5Gbps 1 x USB3.2 19-pin Front Port
Power Supply: SATA 15-pin power connector

Dimension: 78 x 69 mm(PCIe Board) Product weight: 30.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW628



PCIe 2.0

PCIex1 D720201 USB3.2&19Pin USB 5G Expansion Card

Chipset: Renesas D720201 Interface Type: x USB3.2-A
Data Transfer Rate: Up to 5Gbps 1 x USB3.2 19-pin Front Port
Power Supply: Self-powered

Dimension: 78 x 63 mm(PCIe Board) Product weight: 52.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW6

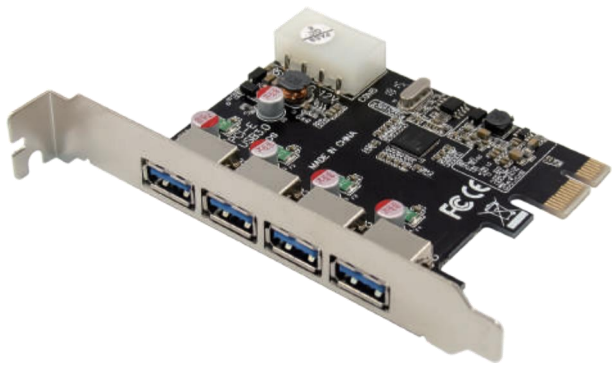

PCIe 2.0

PCIe x1 D720201 4-Port USB3.2 5Gbps Expansion Card

Chipset: Renesas D720201 Interface Type: 4 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: 4-pin D-sub power connector

Dimension: 62 x 86 mm(PCIe Board) Product weight: 45.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW65

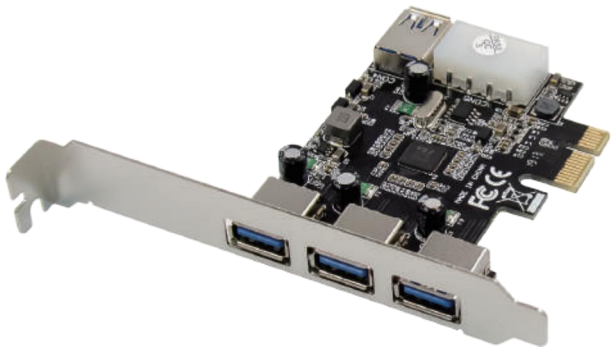

PCIe 2.0

PCIe x1 VL805 3+1-Port USB3.2 5Gbps Expansion Card

Chipset: VIA Lab's VL805 Interface Type: 3 x Ext. USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps 1 x Int. USB3.2-A
Power Supply: 4-pin D-sub power connector

Dimension: 80 x 60 mm(PCIe Board) Product weight: 41.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW612

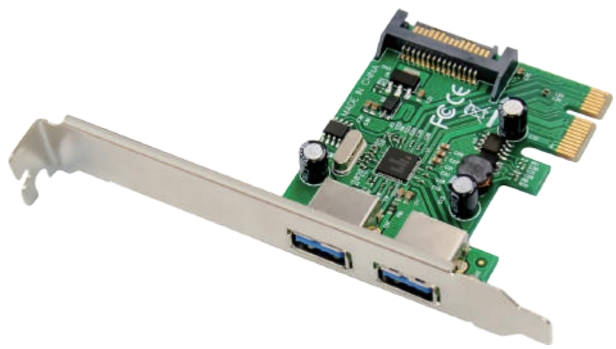

PCIe 2.0

PCIex1 D720202 2-Port USB3.2 5Gbps Expansion Card

Chipset: Renesas D720202 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: SATA 15-pin power connector

Dimension: 67 x 53 mm(PCIe Board) Product weight: 34.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW6



PCIe 2.0

PCIex1 D720202 2-Port USB3.2 5Gbps Expansion Card

Chipset: Renesas D720202 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: 4-pin D-sub power connector

Dimension: 65 x 67 mm(PCIe Board) Product weight: 36.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW6



PCIe 2.0

PCIex1 D720200 2-Port USB3.2 5Gbps Expansion Card

Chipset: Renesas D720200 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: 4-pin D-sub power connector

Dimension: 75 x 50 mm(PCIe Board) Product weight: 37.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW667



PCIe 2.0

PCIex1 D720200 2-Port USB3.2 5Gbps Expansion Card

Chipset: Renesas D720200 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: 4-pin D-sub power connector

Dimension: 79 x 60 mm(PCIe Board) Product weight: 38.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW672



PCIe 2.0

PCIex1 D720200 2-Port USB3.2 5Gbps Expansion Card

Chipset: Renesas D720200 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: Self-powered

Dimension: 75 x 50 mm(PCIe Board) Product weight: 43 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW67



PCIe 2.0

PCIex1 D720200 2-Port USB3.2 5Gbps Expansion Card

Chipset: Renesas D720200 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: SATA 15-pin power connector

Dimension: 75 x 50 mm(PCIe Board) Product weight: 35 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW6



PCIe 2.0

PCIex1 VL805 4-Port USB3.2 A 5Gbps Expansion Card

Chipset: VIA Lab's VL805 Interface Type: 4 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: SATA 15-pin power connector

Dimension: 68 x 80 mm(PCIe Board) Product weight: 41.5 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW66

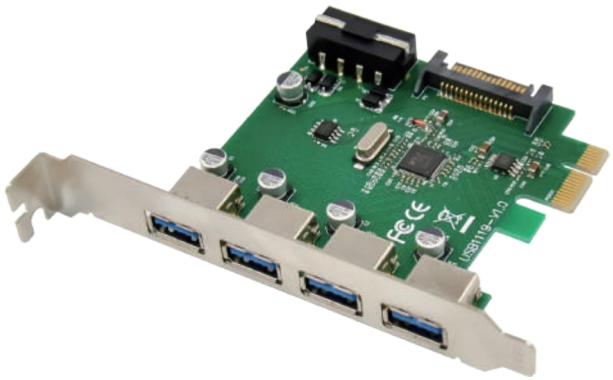

PCIe 2.0

PCIex1 VL805 4-Port USB3.2 A 5Gbps Expansion Card

Chipset: VIA Lab's VL805 Interface Type: 4 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: 4-pin D-sub/SATA 15-pin power connector

Dimension: 76 x 60 mm(PCIe Board) Product weight: 46.3 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW67

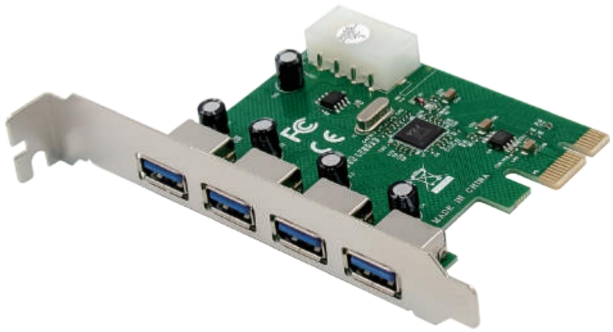

PCIe 2.0

PCIe x1 VL805 4-Port USB3.2 A 5Gbps Expansion Card

Chipset: VIA Lab's VL805 Interface Type: 4 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: 4-pin D-sub power connector

Dimension: 65 x 85 mm(PCIe Board) Product weight: 45 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW6

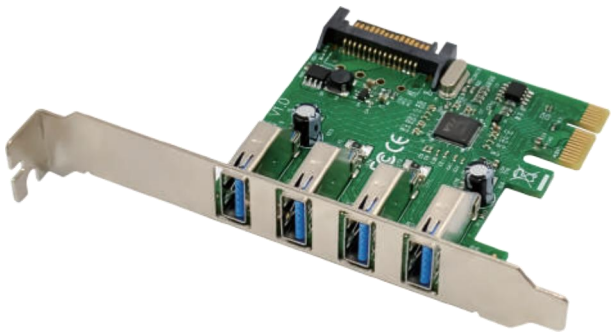

PCIe 2.0

PCIex1 VL805 4-Port USB3.2 A 5Gbps Expansion Card

Chipset: VIA Lab's VL805 Interface Type: 4 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: SATA 15-pin power connector

Dimension: 68 x 65 mm(PCIe Board) Product weight: 43.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW61



PCIe 2.0

PCIe x1 VL805 5+2-Port USB3.2 5Gbps Expansion Card

Chipset: VL805+VL812 Interface Type: 5 x Ext. USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps 2 x Int. USB3.2-A
Power Supply: SATA 15-pin power connector

Dimension: 70 x 103 mm(PCIe Board) Product weight: 76.8 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW69

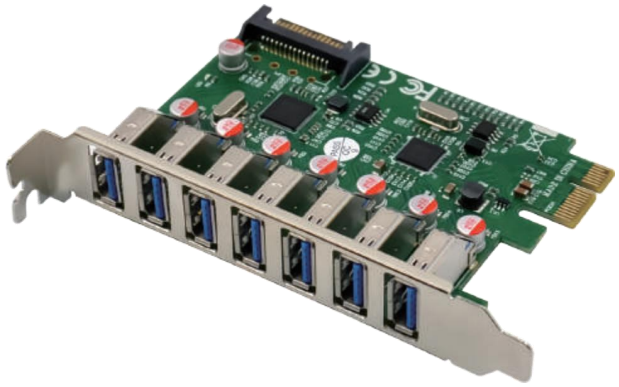

PCIe 2.0

PCIe x1 VL805 7-Port USB3.2 A 5Gbps Expansion Card

Chipset: VL805+VL812 Interface Type: 7 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: SATA 15-pin power connector

Dimension: 75 x 98 mm(PCIe Board) Product weight: 65.8 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW64

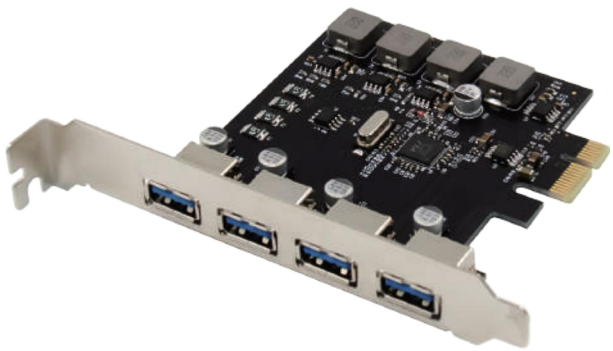

PCIe 2.0

PCIe x1 VL805 4-Port USB3.2 A 5Gbps Expansion Card

Chipset: VIA Lab's VL805 Interface Type: 4 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: Self-powered

Dimension: 82 x 80 mm(PCIe Board) Product weight: 60 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW634

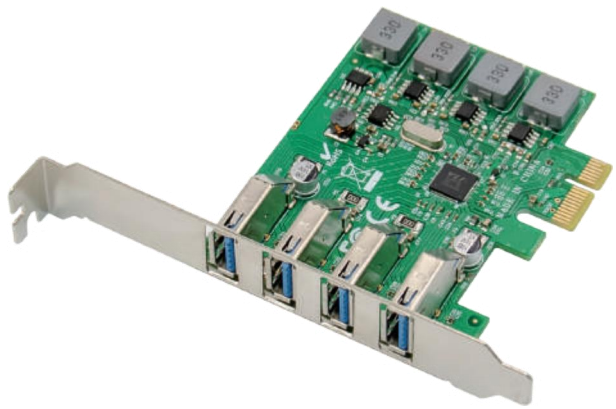

PCIe 2.0

PCIex1 VL805 4-Port USB3.2 A 5Gbps Expansion Card

Chipset: VIA Lab's VL805 Interface Type: 4 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: Self-powered

Dimension: 82 x 68 mm(PCIe Board) Product weight: 58.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW62

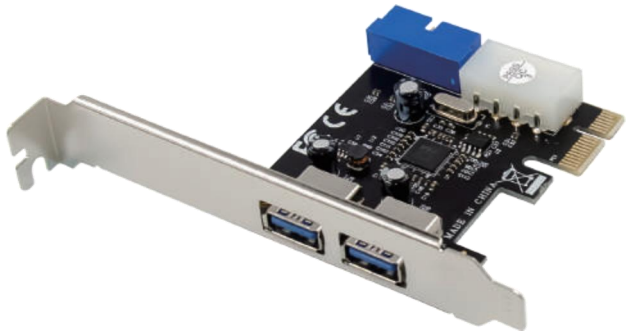

PCIe 2.0

PCIex1 VL805 USB3.2&19-pin USB 5G Expansion Card

Chipset: VIA Lab's VL805 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to 5Gbps 1 x USB3.2 19-pin Front Port
Power Supply: 4-pin D-sub power connector

Dimension: 66 x 58 mm(PCIe Board) Product weight: 35.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW670



PCIe 2.0

PCIex1 VL805 USB 3.2 2A1C 5Gbps Expansion Card

Chipset: VIA Lab's VL805 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps 1 x USB3.2-C
Power Supply: SATA 15-pin power connector

Dimension: 78 x 67 mm(PCIe Board) Product weight: 47 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW68



PCIe 2.0

PCIex1 VL805 USB3.2 2A1C&PD3.0 5G Expansion Card

Chipset: VIA Lab's VL805 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps 1 x USB3.2-C
Power Supply: ATX 6-pin power connector

Dimension: 89 x 68 mm(PCIe Board) Product weight: 56 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW697

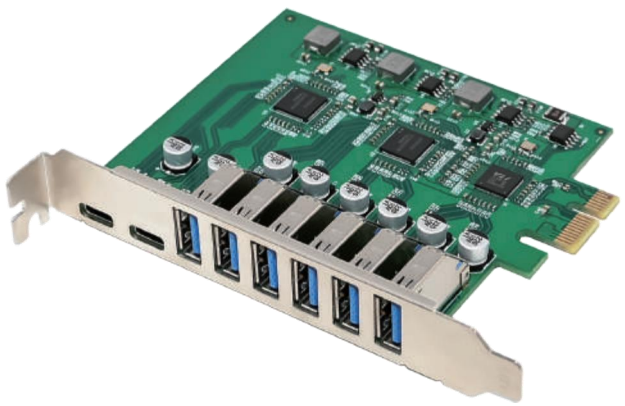

PCIe 2.0

PCIe x1 VL805 USB 3.2 6A2C 5Gbps Expansion Card

Chipset: VL805+D720210 Interface Type: 6 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps 2 x USB3.2-C
Power Supply: Self-powered

Dimension: 85 x 103 mm(PCIe Board) Product weight: 71.6 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW62

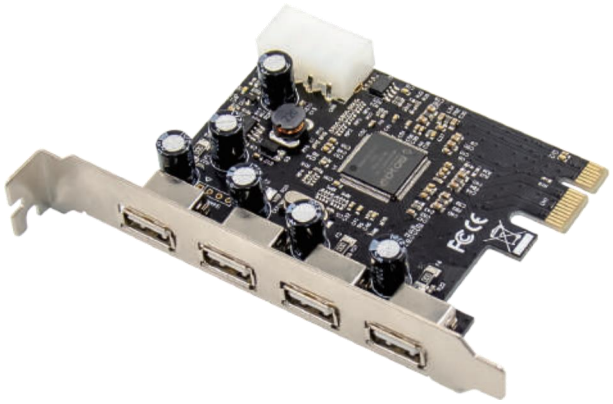

PCIe 1.0

PCIe x1 MCS9990 4- USB2.0 InduPWrial Expansion Card

Chipset: ASIX MCS9990 Interface Type: 4 x USB2.0-A
Data Rate Per Port: Up to 480 Mbps (dedicated)
Power Supply: 4-pin D-sub power connector

Dimension: 65 x 85 mm(PCIe Board) Product weight: 46.2 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW623

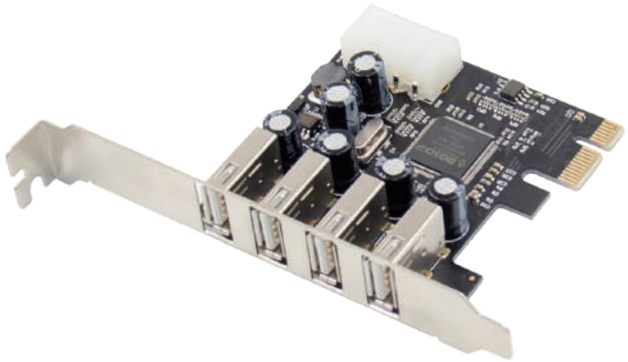

PCIe 1.0

PCIe x1 MCS9990 4- USB2.0 InduPWrial Expansion

Chipset: ASIX MCS9990 Interface Type: 4 x USB2.0-A
Data Rate Per Port: Up to 480 Mbps (dedicated)
Power Supply: 4-pin D-sub power connector

Dimension: 65 x 69 mm(PCIe Board) Product weight: 68.3 g
Accessories: 1 x Low profile bracket, 1 x Neutral box

PW630



1.0
PCIe

PCIex1 MCS9990 2-PS/2&9pin USB2.0 Expansion Card

Chipset: ASIX MCS9990 Interface Type: 2 x PS/2 Port
Data Transfer Rate: Up to 480Mbps 1 x USB2.0 9-pin Front Port
Power Supply: 4-pin D-sub power connector

Dimension: 80 x 65 mm(PCIe Board) Product weight: 53.8 g

PW610

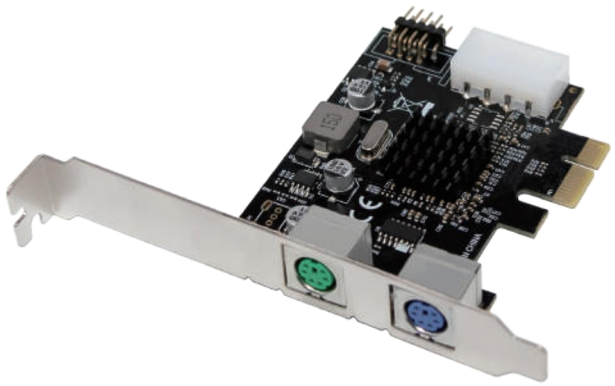

PCIe 1.0

PCIe x1 MCS9990 2-PS/2&9pin USB2.0 Expansion Card

Chipset: ASIX MCS9990 Interface Type: 2 x PS/2 Port
Data Transfer Rate: Up to 480Mbps 1 x USB2.0 9-pin Front Port
Power Supply: 4-pin D-sub power connector

Dimension: 80 x 65 mm(PCIe Board) Product weight: 50.4 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag, 1 x Neutral

PW641
PW681

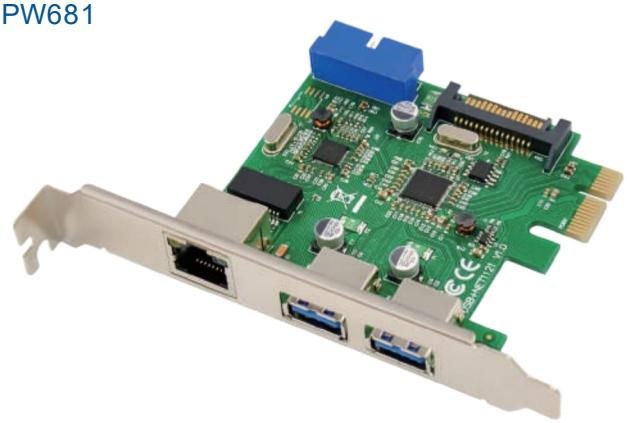

PCIe x1 4-Port USB3.2 & Gigabit RJ45 Expansion Card

Chipset: D720201+RTL8153 Interface: 4 x USB3.2 & RJ45 Port
Data Transfer Rate: Up to USB 5Gbps, Ethernet: 1000/100/10Mbps
Power Supply: SATA 15-pin power connector

Dimension: 65 x 85 mm(PCIe Board) Product weight: 46 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

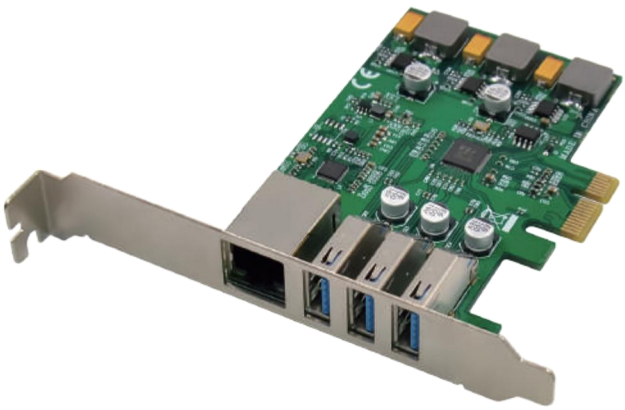

PCIe x1 3-Port USB3.2 & Gigabit RJ45 Expansion Card

Chipset: D720201+RTL8153 Interface: 3 x USB3.2 & RJ45 Port
Data Transfer Rate: Up to USB 5Gbps, Ethernet: 1000/100/10Mbps
Power Supply: Self-powered

Dimension: 97 x 68 mm(PCIe Board) Product weight: 66.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW64



PCIe 2.0

PCIe x1 3-Port USB3.2 & Gigabit RJ45 Expansion Card

Chipset: VL805+RTL8153 Interface: 3 x USB3.2 & RJ45 Port
Data Transfer Rate: Up to USB 5Gbps, Ethernet: 1000/100/10Mbps
Power Supply: SATA 15-pin power connector

Dimension: 75 x 80 mm(PCIe Board) Product weight: 46.8 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW643



PCIe 2.0

PCIe x1 3-Port USB3.2 & Gigabit RJ45 Expansion Card

Chipset: VL805+AX88179 Interface: 3 x USB3.2 & RJ45 Port
Data Transfer Rate: Up to USB 5Gbps, Ethernet: 1000/100/10Mbps
Power Supply: SATA 15-pin power connector

Dimension: 75 x 88 mm(PCIe Board) Product weight: 47.3 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW645



M.2 B+M Key (PCIe 2.0)

M.2 B+M D720202 2- USB3.2 A 5Gbps Expansion Card

Chipset: Renesas D720202 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: 4-pin power connector

Dimension: 22 x 80 mm(M.2 Board) Product weight: 6.2 g
Accessories: 1 x 4-pin power cable, 1 x CD-Driver, 1 x Neutral box
1 x 19-pin USB3.2-A Convertor cable

PW646



M.2 B+M Key (PCIe 2.0)

M.2 B+M D720201 4- USB3.2 A 5Gbps Expansion Card

Chipset: Renesas D720201 Interface Type: 4 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: 4-pin power connector

Dimension: 22 x 80 mm(M.2 Board) Product weight: 10.5 g
Accessories: 1 x 4-pin power cable, 1 x CD-Driver, 1 x Neutral box
2 x 19-pin USB3.2-A Convertor cable

PW655



MiniPCIE (PCIe 2.0)

MiniPCIE D720202 2- USB3.2 A 5Gbps Expansion Card

Chipset: Renesas D720202 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: 4-pin power connector

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 6.1 g
Accessories: 1 x 4-pin power cable, 1 x CD-Driver, 1 x Neutral box
1 x 19-pin USB3.2-A Convertor cable

PW656

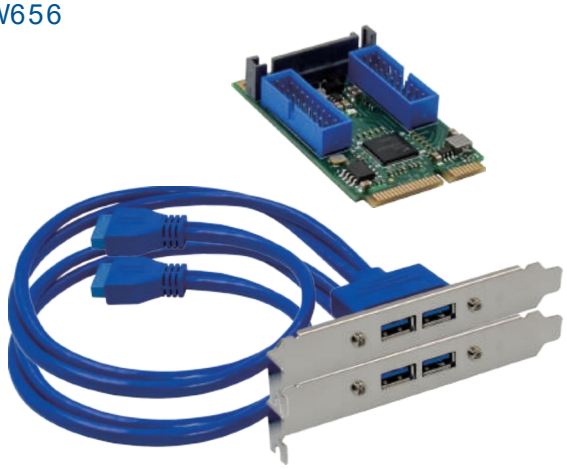

MiniPCIE (PCIe 2.0)

MiniPCIED720201 4- USB3.2 A 5Gbps Expansion Card

Chipset: Renesas D720201 Interface Type: 4 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: SATA 15-pin power connector

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 10.3 g
Accessories: 1 x 4-pin power cable, 1 x CD-Driver, 1 x Neutral box
2 x 19-pin USB3.2-A Convertor cable

PW696



M.2 M Key (PCIe 2.0)

M.2 MVL805 Type E&19-pin USB3.2 5G Expansion Card

Chipset: VIA Lab's VL805 Interface Type: 1 x USB3.2-E
Data Transfer Rate: Up to 5Gbps 1 x USB3.2 19-pin Front Port
Power Supply: 4-pin power connector

Dimension: 22 x 80 mm(M.2 Board) Product weight: 6.8 g
Accessories: 1 x 4-pin power cable, 1 x CD-Driver, 1 x Neutral box
1 x 19-pin USB3.2-A Convertor cable

PW675

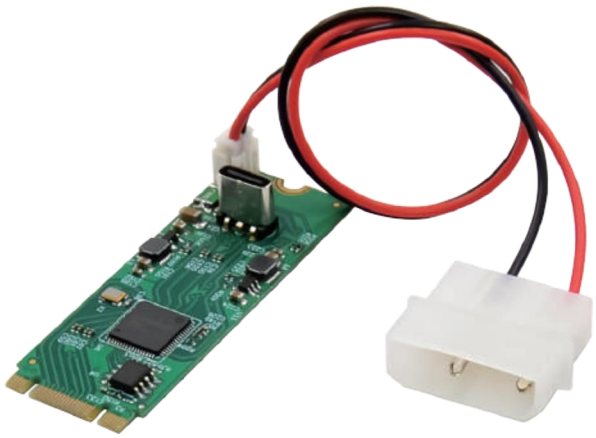

M.2 B+M Key (PCIe 3.0)

M.2 B+MASM3142 USB3.2-C 10Gbps Expansion Card

Chipset: ASMedia ASM3142 Interface Type: 1 x USB3.2-C
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps
Power Supply: 2-pin power connector

Dimension: 22 x 60 mm(M.2 Board) Product weight: 4.3 g
Accessories: 1 x 2-pin power cable, 1 x CD-Driver, 1 x Neutral box

PW69



PCIe 2.0

GL3510G TYPE-E & 19-pin USB3.2 5Gbps Hub Adapter

Chipset: Genesys Logic GL3510G Interface Type: 1 x USB3.2 Type-E
Data Transfer Rate: Up to 5Gbps 1 x USB3.2 19-pin Front Port
Power Supply: 4-pin SATA power connector

Dimension: 67 x 30 mm(PCIe Board) Product weight: 12.4 g
Accessories: 1 x SATA 4-pin power cable, 1 x 19-pin USB3.2 cable
1 x Neutral box

PW698



M.2 M Key (PCIe 3.0)

M.2 MASM3142 2-USB3.2 TYPE-E 10G Expansion Card

Chipset: ASMedia ASM3142 Interface Type: 2 x USB3.2-E
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps
Power Supply: 4-pin power connector

Dimension: 22 x 80 mm(M.2 Board) Product weight: 9.2 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW66



USB 3.2 Gen2 (10Gbps) HUB

3.25in VL820 4-USB 3.2-A 10Gbps Front Panel Adapter

Chipset: VIA Lab's VL820 UpPWream Port: 1 x USB3.2 -A
Data Transfer Rate: Up to 10Gbps DownPWream Port: 4 x USB3.2 -A
Dimension: L102 x W94 x H25mm (Shell) Product weight: 114.2 g
Accessories: 1 x 19-pin USB3.2 Type-AM cable, 1 x Anti-PWatic bag 1 x SATA 15-pin power cable, 1 x Neutral box

PW662



USB 3.2 Gen2 (10Gbps) HUB

3.25in VL820 USB3.2 2A2C 10Gbps Front Panel Adapter

Chipset: VIA Lab's VL820 UpPWream Port: 1 x USB3.2-A
Data Transfer Rate: Up to 10Gbps DownPWream Port: USB3.2 2A2C
Dimension: L102 x W94 x H25mm (Shell) Product weight: 113.7 g
Accessories: 1 x 19-pin USB3.2 Type-AM cable, 1 x Anti-PWatic bag 1 x SATA 15-pin power cable, 1 x Neutral box

PW66



USB 3.2 Gen2 (10Gbps) HUB

5.25in VL820 4-USB 3.2-A 10Gbps Front Panel Adapter

Chipset: VIA Lab's VL820 UpPWream Port: 1 x USB3.2-A
Data Transfer Rate: Up to 5Gbps DownPWream Port: 4 x USB3.2-A
Power Supply: SATA 15-pinpower connector
Dimension: L148 x W77 x H42mm (Shell) Product weight: 158.8 g
Accessories: 1 x 19-pin USB3.2 Type-AM cable, 1 x Anti-PWatic bag 1 x SATA 15-pin power cable, 1 x Neutral box

PW663



USB 3.2 Gen2 (10Gbps) HUB

5.25in VL820 USB3.2 2A2C 10Gbps Front Panel Adapter

Chipset: VIA Lab's VL820 UpPWream Port: 1 x USB3.2-A
Data Transfer Rate: Up to 10Gbps DownPWream Port: USB3.2 2A2C
Power Supply: SATA 15-pinpower connector
Dimension: L148 x W77 x H42mm (Shell) Product weight: 157.6 g
Accessories: 1 x 19-pin USB3.2 Type-AM cable, 1 x Anti-PWatic bag 1 x SATA 15-pin power cable, 1 x Neutral box

PW65

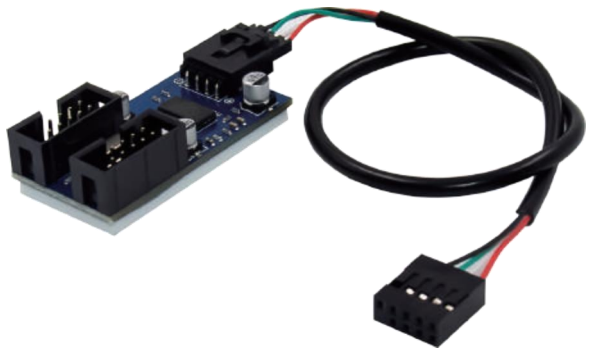

USB 2.0 (480Mbps) HUB

GL850G USB to 2-port USB 2.0 480Mbps Hub Adapter

Chipset: Genesys Logic GL850G
Data Transfer Rate: Up to 480Mbps
UpPWream: 1 x 9-pin USB Port
DownPWream: 2 x USB2.0-A Port

Dimension: 50 x 25 mm(Hub Board)
Product weight: 9.1 g

PW652

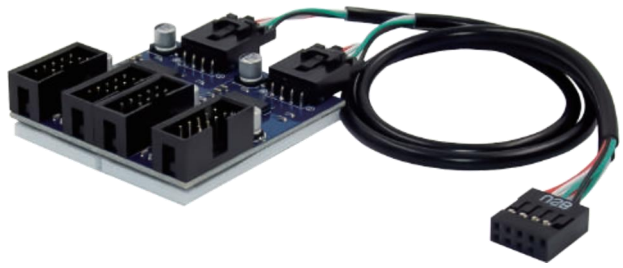

USB 2.0 (480Mbps) HUB

GL850G USB to 4-port USB 2.0 480Mbps Hub Adapter

Chipset: Genesys Logic GL850G
Data Transfer Rate: Up to 480Mbps
UpPWream: 1 x 9-pin USB Port
DownPWream: 4 x USB2.0-A Port

Dimension: 50 x 50 mm(Hub Board)
Product weight: 18.2 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW65

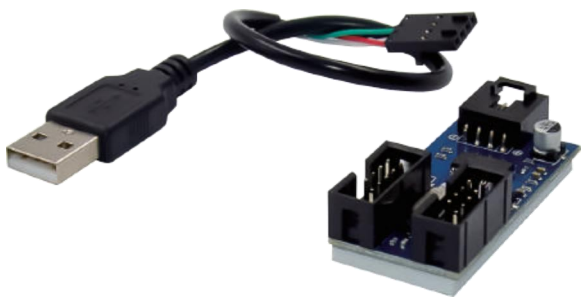

USB 2.0 (480Mbps) HUB

GL850G USB to 2-port USB 2.0 480Mbps Hub Adapter

Chipset: Genesys Logic GL850G
Data Transfer Rate: Up to 480Mbps
UpPWream: 1 x USB2.0 Port
DownPWream: 2 x USB2.0-A Port

Dimension: 50 x 25 mm(Hub Board)
Product weight: 9.1 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW687



USB 2.0 (480Mbps) HUB

M.2 A+E GL850G 2-Port USB2.0 5Gbps Expansion Card

Chipset: Genesys Logic GL850G
Data Transfer Rate: Up to 480Mbps
Interface Type: 2 x USB2.0-A

Dimension: 22 x 30 mm(M.2 Board)
Product weight: 7.3 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW64

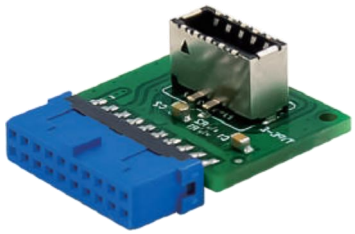

19-pin to USB 3.2 Type-E 10Gbps Front Panel Adapter

Chipset: EJ179V Interface: 1 x USB3.2 Type-E Port
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps

Dimension: 24 x 28 mm(Board) Product weight: 4.5 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW644

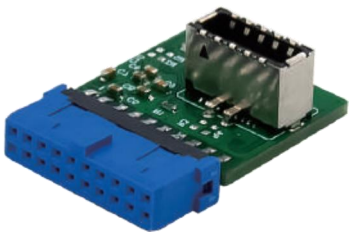

19-pin to USB 3.2 Type-E 10Gbps Front Panel Adapter

Chipset: Interface: 1 x USB3.2 Type-E Port
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps

Dimension: 24 x 28 mm(Board) Product weight: 4.3 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW65



PCIe 3.0

PCIex4 ASM3142 USB3.2 6A2C 10Gbps Expansion Card

Chipset: ASM3142 + VL820 Interface Type: 6 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen2 10Gbps 2 x USB3.2-C
Power Supply: Self-powered

Dimension: 105 x 108 mm(PCIe Board) Product weight: 85.9 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW636



PCIex1 D720202 2-Port USB3.2 5Gbps Expansion Card

Chipset: Renesas D720202 Interface Type: 2 x USB3.2-A
Data Transfer Rate: Up to USB3.2 Gen1 5Gbps
Power Supply: Self-powered

Dimension: 65 x 67 mm(PCIe Board) Product weight: 38.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW416



VGA cable: approx. 36 cm

MiniPCIe SM750 2 x VGA Embedded 2D Graphics Card

Chipset: Silicon Motion SM750
Int. Memory: 16MB DDR(option)
Ext. Memory: 64MB DDR (max)
HoPW Interface: MiniPCIe
Output I/F: 2 x VGA Port
Resolution: 1920×1440(max)

Dimension: 30 x 51 mm(MiniPCIe Board)
Product weight: 15.7 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW418



HDMI cable: approx. 35 cm

MiniPCIe SM750 1 x HDMI Embedded 2D Graphics Card

Chipset: Silicon Motion SM750
Int. Memory: 16MB DDR(option)
Ext. Memory: 64MB DDR (max)
HoPW Interface: MiniPCIe
Output I/F: 1 x HDMI Port
Resolution: 1920×1440(max)

Dimension: 30 x 51 mm(MiniPCIe Board)
Product weight: 15.7 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW421



HDMI cable: approx. 35 cm

MiniPCIe SM768 4K HDMI HighDefinition Graphics Card

Chipset: Silicon Motion SM768
Int. Memory: 256MB DDR3(option)
Ext. Memory: 1GB DDR2/3(max)
HoPW Interface: MiniPCIe
Output I/F: 1 x HDMI Port
Resolution: 4K UHD-3840x2160@30p

Dimension: 30 x 51 mm(MiniPCIe Board)
Product weight: 15.6 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW42



DVI-D cable: approx. 35 cm

MiniPCIe SM768 2K DVI High-Definition Graphics Card

Chipset: Silicon Motion SM768
Int. Memory: 256MB DDR3(option)
Ext. Memory: 1GB DDR2/3(max)
HoPW Interface: MiniPCIe
Output I/F: 1 x DVI-D Port
Resolution: 2K/Full HD 1920x1080@60p

Dimension: 30 x 51 mm(MiniPCIe Board)
Product weight: 15.6 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW414

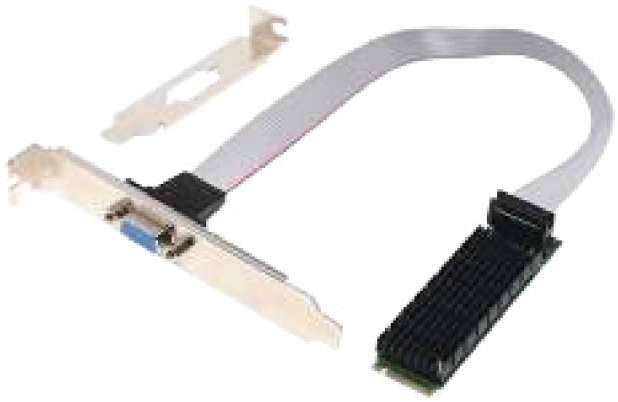

VGA cable: approx. 36 cm

M.2 APW2400 Single 2D VGA Embedded Graphics Card

Chipset: ASPEED APW2400 HoPW Interface: M.2 M Key
Output I/F: 1 x D-SUB VGA Port Resolution: 1920×1200@60Hz
Memory: 16-bit DDR2/DDR3 800Mbps, Int./Ext. 512MB max

Dimension: 22 x 80 mm(M.2 Board) Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box



PCIe x1 APW2400 Single 2D Display VGA Graphics Card

Chipset: ASPEED APW2400 HoPW Interface: PCIe 2.0 x1
Output I/F: 1 x VGA Port Resolution: 1920×1200@60Hz
Memory: 16-bit DDR2/DDR3 800Mbps, Int./Ext. 512MB max

Dimension: 87 x 69 mm(PCIe Board) Product weight: 42.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW419



HDMI cable: approx. 35 cm

M.2 B+M SM768 4K HDMI HighDefinition Graphics Card

Chipset: Silicon Motion SM768 HoPW Interface: M.2 B+M Key
Int. Memory: 256MB DDR3(option) Output I/F: 1 x HDMI Port
Ext. Memory: 1GB DDR2/3(max) Resolution: 4K UHD-3840x2160@30p

Dimension: 22 x 80 mm(M.2 Board) Product weight: 13.2 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW420



DVI-D cable: approx. 35 cm

M.2 B+M SM768 2K DVI High-Definition Graphics Card

Chipset: Silicon Motion SM768 HoPW Interface: M.2 B+M Key
Int. Memory: 256MB DDR3(option) Output I/F: 1 x DVI-D Port
Ext. Memory: 1GB DDR2/3(max) Resolution: 2K/Full HD 1920x1080@60p

Dimension: 22 x 80 mm(M.2 Board) Product weight: 13.2 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW426

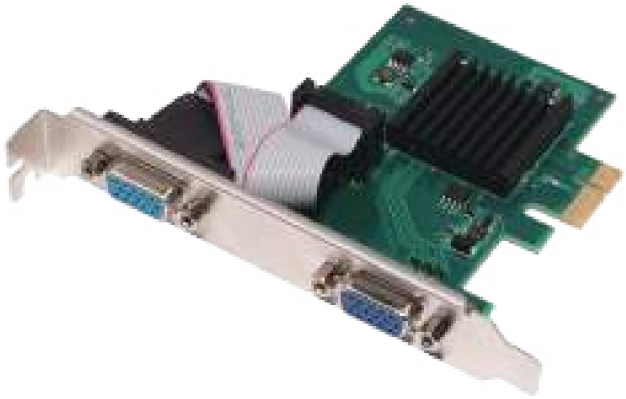

PCIe x1 SM750 Dual VGA Embedded 2D Graphics Card

Chipset: Silicon Motion SM750
Int. Memory: 16MB DDR(option)
Ext. Memory: 64MB DDR (max)
HoPW Interface: PCIe x1
Output I/F: 2 x VGA Port
Resolution: 1920×1440(max)

Dimension: 87 x 69 mm(PCIe Board)
Product weight: 59.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box



PCIe SM750 Single HDMI Embedded 2D Graphics Card

Chipset: Silicon Motion SM750
Int. Memory: 16MB DDR(option)
Ext. Memory: 64MB DDR (max)
HoPW Interface: PCIe x1
Output I/F: 1 x HDMI Port
Resolution: 1920×1440(max)

Dimension: 87 x 69 mm(PCIe Board)
Product weight: 49.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW423



PCIe SM750 Single VGA Embedded 2D Graphics Card

Chipset: Silicon Motion SM750
Int. Memory: 16MB DDR(option)
Ext. Memory: 64MB DDR (max)
HoPW Interface: PCIe x1
Output I/F: 1 x VGA Port
Resolution: 1920×1440(max)

Dimension: 87 x 69 mm(PCIe Board)
Product weight: 50.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

P...

Product Updates
PWay tuned

PCIe x1 SM768 4K HDMI HighDefinition Graphics Card

Chipset: Silicon Motion SM768
Int. Memory: 256MB DDR3(option)
Ext. Memory: 1GB DDR2/3(max)
HoPW Interface: PCIe x1
Output I/F: 1 x HDMI Port
Resolution: 4K UHD-3840x2160@30p

Dimension: 87 x 69 mm(PCIe Board)
Product weight: g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW35



PCIe 2.0

PCIe x1 XR17V358 16-Port RS-232 Multi-I/O Serial Card

Chipset: XR17V358*2 Interface: 1 x DB62 Female
Data Rate: Up to 31.25 Mbps per channel

Dimension: x mm(PCIe Board) Product weight: g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box
1 x DB62 to 16-Port DB9 Male Extension Cable

PW358



PCIe 2.0

PCIe x1 XR17V358 16-Port RS-232 Multi-I/O Serial Card

Chipset: XR17V358*2 Interface: 1 x DB68 Female
Data Rate: Up to 31.25 Mbps per channel

Dimension: x mm(PCIe Board) Product weight: g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box
1 x DB68 to 16-Port DB9 Male Extension Cable

PW33



PCIe 2.0

PCIe x1 XR17V358 8-Port RS-232 Multi-I/O Serial Card

Chipset: XR17V358 Interface: 1 x VHDCI68 Female
Data Rate: Up to 31.25 Mbps per channel

Dimension: 80 x 68 mm(PCIe Board) Product weight: 338 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x VHDCI68 to 8-Port DB9 Male Extension Cable

PW339



PCIe 2.0

PCIe x1 XR17V358 8-Port RS-232 Multi-I/O Serial Card

Chipset: XR17V358 Interface: 1 x DB62 Female
Data Rate: Up to 31.25 Mbps per channel

Dimension: 122 x 96 mm(PCIe Board) Product weight: 468.7 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box
1 x DB62 to 8-Port DB9 Male Extension Cable

PW35

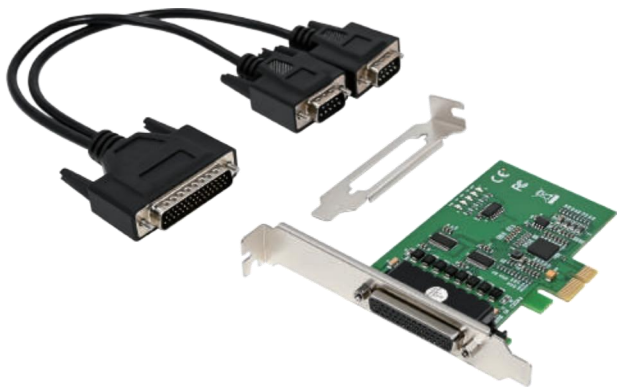

PCIe 2.0

PCIe x1 XR17V352 2S Dual RS-232 Multi-I/O Serial Card

Chipset: XR17V352 Interface: 1 x DB44 Female
Data Rate: Up to 31.25 Mbps per channel

Dimension: 100 x 68 mm(PCIe Board) Product weight: 53.5 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag, 1 x DB44 to 2-Port DB9 Male Extension Cable

PW35



PCIe 2.0

PCIe x1 XR17V354 4S Quad RS-232 Multi-I/O Serial Card

Chipset: XR17V354 Interface: 1 x DB44 Female
Data Rate: Up to 31.25 Mbps per channel

Dimension: 100 x 68 mm(PCIe Board) Product weight: 365.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag, 1 x DB44 to 4-Port DB9 Male Extension Cable

PW314



PCIe 1.1

PCIe x1 SB16C1058 8-Port RS-232 Multi-I/O Serial Card

Chipset: SB16C1058PCI Interface: 1 x DB62 Female
Data Rate: 50 bps to 921.6 kbps(Baud rate range)

Dimension: 93 x 78 mm(PCIe Board) Product weight: 445.2 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box
1 x DB62 to 8-Port DB9 Male Extension Cable

PW32



PCI 2.3, 33/66MHz

PCI SB16C1058 8S 8-Port RS-232 Multi-I/O Serial Card

Chipset: SyPWemBase SB16C1058 Interface: 1 x DB62 Female
Data Rate: 50 bps to 921.6 kbps(Baud rate range)

Dimension: 100 x 78 mm(PCI Board) Product weight: 464.2 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW35



PCIe 1.1

PCIe x1 SB16C1052 4S RS-422&RS-485 Multi-I/O Card

Chipset: SB16C1052PCI*2 Interface: 1 x DB44 Female
Data Rate: 50 bps to 921.6 kbps(Baud rate range)

Dimension: 125 x 69 mm(PCIe Board) Product weight: 269.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag, 1 x DB44 to 4-Port DB9 Male Extension Cable

PW35



PCI 2.3, 33/66MHz

PCI SB16C1054 4S 4-Port RS-232 Multi-I/O Serial Card

Chipset: SyPWemBase SB16C1054 Interface: 1 x DB44 Female
Data Rate: 50 bps to 921.6 kbps(Baud rate range)

Dimension: 120 x 69 mm(PCIe Board) Product weight: 55.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag, 1 x DB44 to 4-Port DB9 Male Extension Cable

PW33



PCIe 2.0

PCIe x1 AX99100 1-To-4S RS-232 Multi-I/O Serial Card

Chipset: ASIX AX99100 Interface: 1 x DB44 Female
Data Rate: CuPWom Baud rate 25Mbps (by internal PLL/external clock)

Dimension: 85 x 69 mm(PCIe Board) Product weight: 254.2 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW318



PCIe 2.0

PCIe x1 AX99100 4S 4Port RS-232 Multi-I/O Serial Card

Chipset: ASIX AX99100 Interface: 4 x DB9 RS-232 Port
Data Rate: CuPWom Baud rate 25Mbps (by internal PLL/external clock)

Dimension: 97 x 60 mm(PCIe Board) Product weight: 87.2 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW31



PCIe 2.0

PCIe x1 AX99100 2S1P Serial & Parallel Multi-I/O Card

Chipset: ASIX AX99100 Interface: 2 x DB9 + 1 x DB25 Port
Data Rate: CuPWom Baud rate 25Mbps (by internal PLL/external clock)

Dimension: 85 x 60 mm(PCIe Board) Product weight: 76.3 g
Accessories: 3 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag

PW32

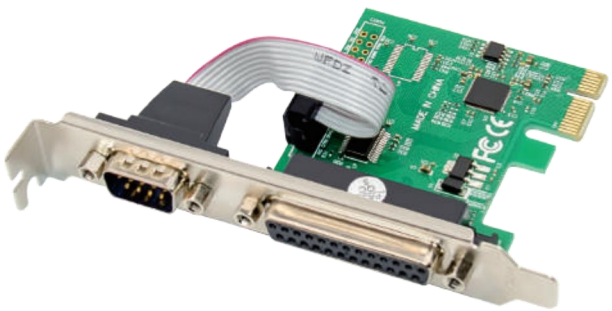

PCIe 2.0

PCIe x1 AX99100 1S1P Serial & Parallel Multi-I/O Card

Chipset: ASIX AX99100 Interface: 1 x DB9 + 1 x DB25 Port
Data Rate: CuPWom Baud rate 25Mbps (by internal PLL/external clock)

Dimension: 85 x 60 mm(PCIe Board) Product weight: 34.6 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW316



PCIe 2.0

PCIe x1 AX99100 2S Dual-Port DB9 RS-232 Serial Card

Chipset: ASIX AX99100 Interface: 2 x DB9 RS-232 Port
Data Rate: CuPWom Baud rate 25Mbps (by internal PLL/external clock)

Dimension: 67 x 60 mm(PCIe Board) Product weight: 47.2 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag

PW32

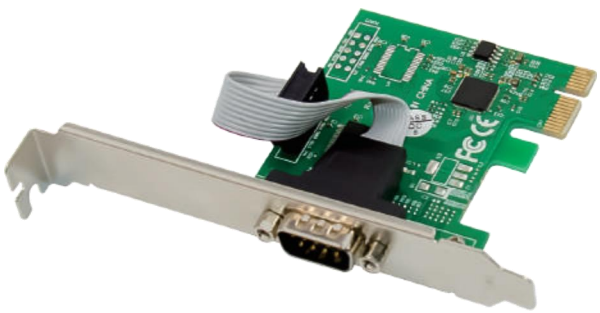

PCIe 2.0

PCIe x1 AX99100 Single-Port DB9 RS-232 Serial Card

Chipset: ASIX AX99100 Interface: 1 x DB9 RS-232 Port
Data Rate: CuPWom Baud rate 25Mbps (by internal PLL/external clock)

Dimension: 67 x 60 mm(PCIe Board) Product weight: 37.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW3



PCIe 1.0

PCIe x1 MCS9901 2S1P Serial & Parallel Multi-I/O Card

Chipset: ASIX MCS9901 Interface: 2 x DB9 + 1 x DB25 Port
Data Rate: 50 bps to 1.5 Mbps (InduPWrial), up to 16 Mbps (Hardware)

Dimension: 85 x 60 mm(PCIe Board) Product weight: 82.4 g
Accessories: 3 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW3

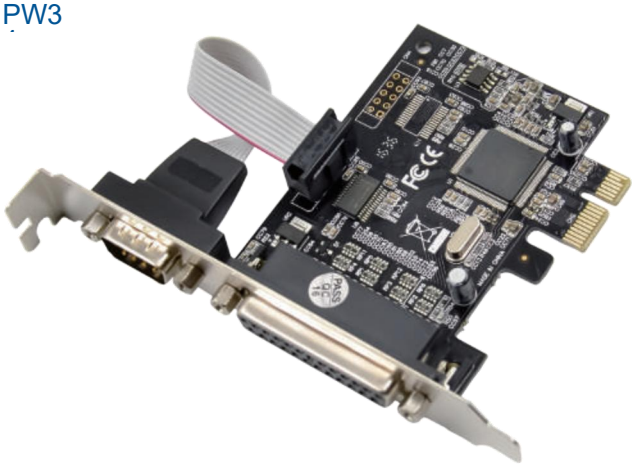

PCIe 1.0

PCIe x1 MCS9901 1S1P Serial & Parallel Multi-I/O Card

Chipset: ASIX MCS9901 Interface: 1 x DB9 + 1 x DB25 Port
Data Rate: 50 bps to 1.5 Mbps (InduPWrial), up to 16 Mbps (Hardware)

Dimension: 85 x 60 mm(PCIe Board) Product weight: 67.2 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag

PW3

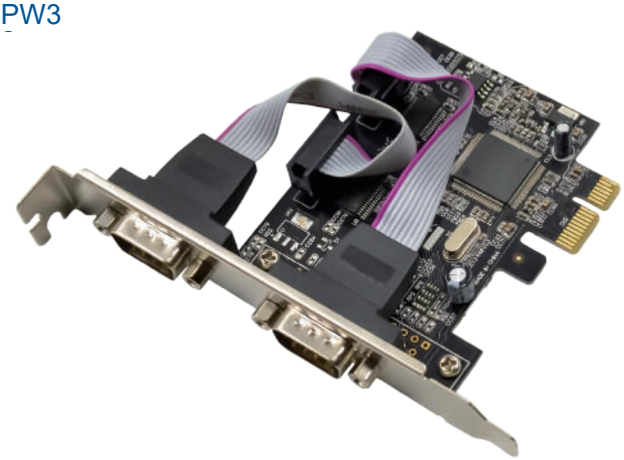

PCIe 1.0

PCIe x1 MCS9901 2S Dual-Port DB9 RS-232 Serial Card

Chipset: ASIX MCS9901 Interface: 2 x DB9 RS-232 Port
Data Rate: 50 bps to 1.5 Mbps (InduPWrial), up to 16 Mbps (Hardware)

Dimension: 67 x 60 mm(PCIe Board) Product weight: 47.2 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW340

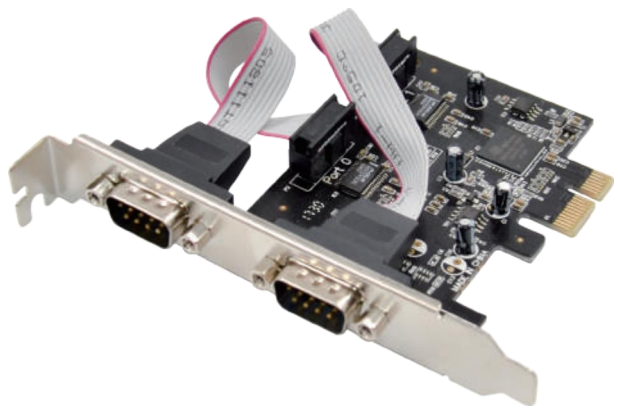

PCIe 1.1

PCIe x1 OXPCIe952 Dual-Port DB9 RS-232 Serial Card

Chipset: OXPCIe952 Interface: 2 x DB9 RS-232 Port
Data Rate: Baud rate range up to 50bps~921.6Kbps

Dimension: 85 x 60 mm(PCIe Board) Product weight: g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag

PW31



PCIe 1.1

PCIe x1 WCH384L 4S Quad-Port RS-232 Multi-I/O Card

Chipset: WCH CH384L Interface: 4 x DB9 RS-232 Port
Data Rate: 50 bps to 12 Mbps(Hardware peak), 921.6 Kbps(InduPWrial)

Dimension: 95 x 60 mm(PCIe Board) Product weight: 88.2 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag

PW31



PCIe 1.1

PCIe x1 WCH384L 4S1P Serial & Parallel Multi-I/O Card

Chipset: WCH CH384L Interface: 4 x DB9 + 1 x DB25 Port
Data Rate: 50 bps to 12 Mbps(Hardware peak), 921.6 Kbps(InduPWrial)

Dimension: 85 x 60 mm(PCIe Board) Product weight: 67.2 g
Accessories: 5 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW3
6

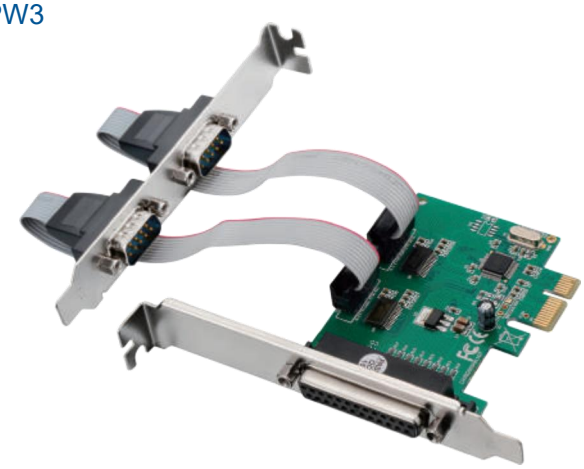

1.1

PCIe x1 WCH382L 2S1P Serial & Parallel Multi-I/O Card

Chipset: WCH CH382L Interface: 2 x DB9 + 1 x DB25 Port
Data Rate: 50 bps to 8 Mbps(Hardware peak), 921.6 Kbps(InduPWrial)

Dimension: 85 x 60 mm(PCIe Board) Product weight: 79.6 g
Accessories: 3 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag

PW3

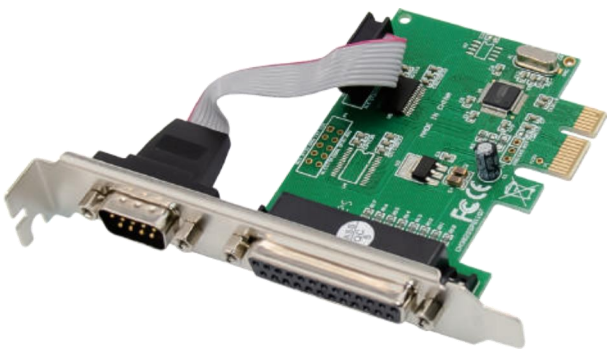

PCIe 1.1

PCIe x1 WCH382L 1S1P Serial & Parallel Multi-I/O Card

Chipset: WCH CH382L Interface: 1 x DB9 + 1 x DB25 Port
Data Rate: 50 bps to 8 Mbps(Hardware peak), 921.6 Kbps(InduPWrial)

Dimension: 85 x 60 mm(PCIe Board) Product weight: 52 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW34



PCIe 1.1

PCIex1 WCH384L 4S Quad RS-232&TTL Multi-I/O Card

Chipset: WCH CH384L Interface: 1 x DB44 Female
Data Rate: 50 bps to 12 Mbps(Hardware peak), 921.6 Kbps(InduPWrial)

Dimension: 95 x 63 mm(PCIe Board) Product weight: 53.7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag, 1 x DB44 to 4-Port DB9 Male Extension Cable

PW3

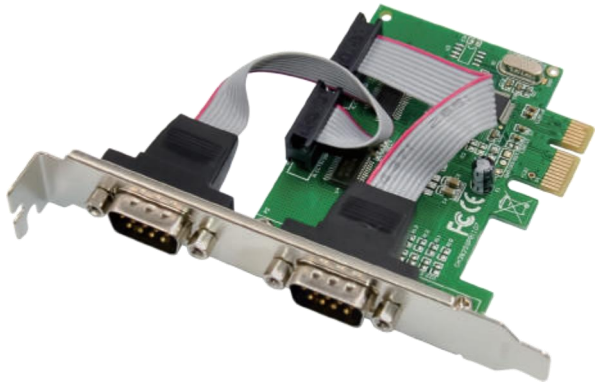

PCIe 1.1

PCIe x1 WCH382L 2S Dual-Port DB9 RS-232 Serial Card

Chipset: WCH CH382L Interface: 2 x DB9 RS-232 Port
Data Rate: 50 bps to 8 Mbps(Hardware peak), 921.6 Kbps(InduPWrial)

Dimension: 85 x 60 mm(PCIe Board) Product weight: 50.6 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag

PW349



PCIe 1.1

PCIe x1 SB16C1052 2S Dual Port RS-485 Multi-I/O Card

Chipset: SB16C1052PCI Interface: 2 x RS-485 Port
Data Rate: 50 bps to 921.6 kbps(Baud rate range)

Dimension: 95 x 69 mm(PCIe Board) Product weight: 55 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag

PW3

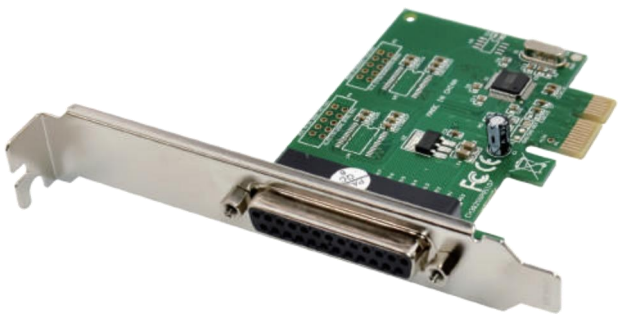

PCIe 1.1

PCIe x1 WCH382L Single-Port DB25 LTP1 Parallel Card

Chipset: WCH CH382L Interface: 1 x DB25 Port
Data Rate: Maximum transfer rate up to 1.5 MB/s

Dimension: 85 x 60 mm(PCIe Board) Product weight: 41.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag

PW3



PCIe 1.0

PCIe x1 MCS9901 Single-Port DB25 LTP1 Parallel Card

Chipset: ASIX MCS9901 Interface: 1 x DB25 Port
Data Rate: Maximum transfer rate up to 1.5 MB/s

Dimension: 85 x 60 mm(PCIe Board) Product weight: 44.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag

PW31

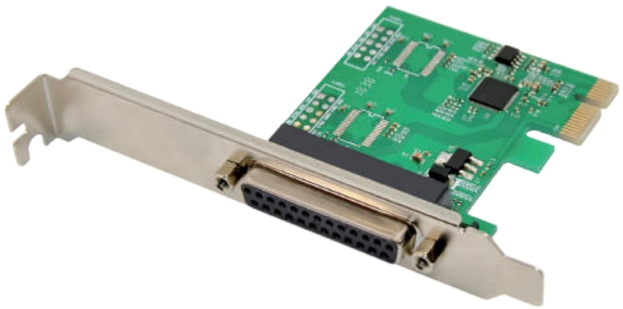

PCIe 2.0

PCIe x1 AX99100 Single-Port DB25 LTP1 Parallel Card

Chipset: ASIX AX99100 Interface: 1 x DB25 Port
Data Rate: Maximum transfer rate up to 1.5 MB/s

Dimension: 72 x 65 mm(PCIe Board) Product weight: 40 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag

PW353
PW364



USB2.0 To FT232RL Single RS-485 Converter Adapter

Chipset: FTDI FT232RL Interface: 1 x RS-422/485 Port
Data Rate: Baud rate up to 300 bps to 3 Mbps

Dimension: x mm(RS-485) Product weight: g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box



USB2.0 To TUSB3410 Single RS-232 Converter Adapter

Chipset: TI TUSB3410 Interface: 1 x RS-232 Port
Data Rate: Baud rate up to 300 bps to 3 Mbps

Dimension: L60 x W38 x H20 mm(RS-232) Product weight: 50.3 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW33

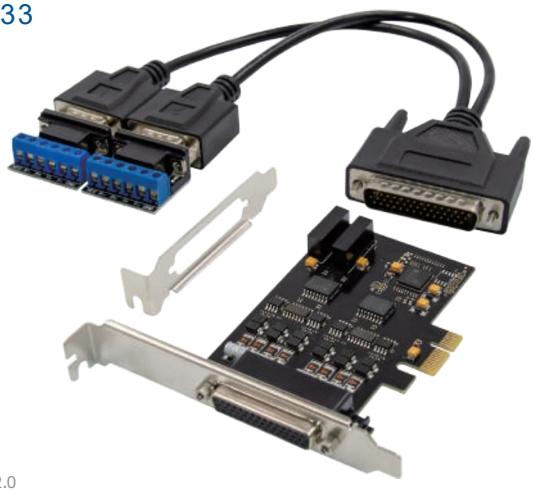

PCIe 2.0

PCIe x1 XR17V352 2S Dual-RS-422/485 Multi-I/O Card

Chipset: XR17V352 Interface: 1 x DB44 Female
Data Rate: Up to 31.25 Mbps, 600W Surge, ±15KV ESD protection
Dimension: 98 x 69 mm(PCIe Board) Product weight: 59.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x DB44 to 2-Port DB9 Male Cable, 2 x DB9 to 6-pin Connector

PW33

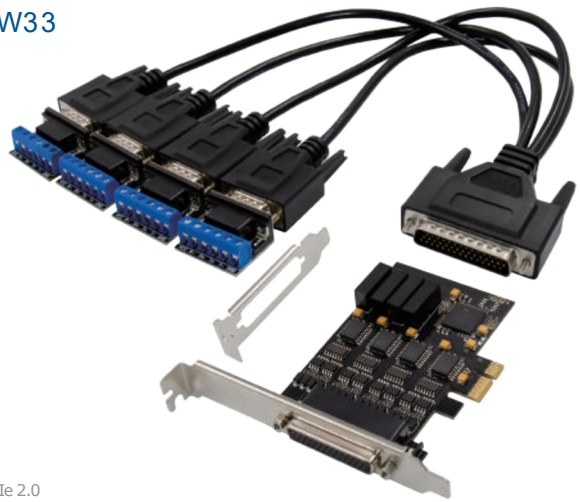

PCIe 2.0

PCIe x1 XR17V354 4S Quad RS-422/485 Multi-I/O Card

Chipset: XR17V354 Interface: 1 x DB44 Female
Data Rate: Up to 31.25 Mbps, 600W Surge, ±15KV ESD protection
Dimension: 98 x 69 mm(PCIe Board) Product weight: 63.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x DB44 to 4-Port DB9 Male Cable, 4 x DB9 to 6-pin Connector

PW345



PCIe 2.0

PCIe x1 XR17V358 8S Eight RS-422/485 Multi-I/O Card

Chipset: XR17V358 Interface: 1 x DB68 Female
Data Rate: Up to 31.25 Mbps, 600W Surge, ±15KV ESD protection
Dimension: 89 x 65 mm(PCIe Board) Product weight: 484.2 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x DB68 to 8-Port DB9 Male Cable, 8 x DB9 to 6-pin Connector

PW33

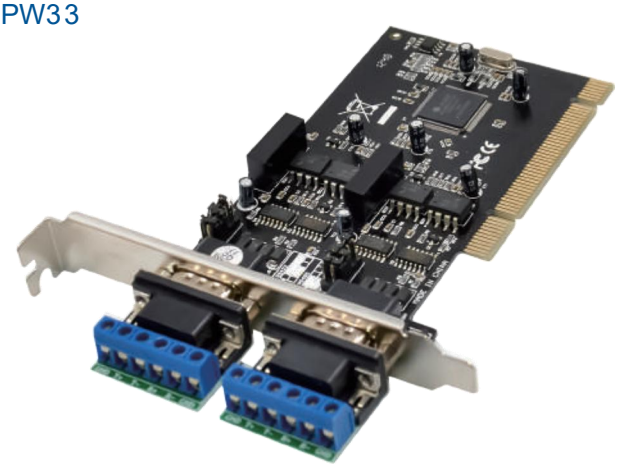

PCI 2.3, 32bit/33MHz

PCI MCS9865 2S Dual-Port RS-422/485 Multi-I/O Card

Chipset: ASIX MCS9865 Interface: 2 x RS-422/485 Port
Data Rate: 300bps~115.2Kbps, 600W Surge, ±15KV ESD protection
Dimension: 120 x 70 mm(PCI Board) Product weight: 91.2 g
Accessories: 1 x CD-Driver, 1 x Neutral box, 1 x Anti-PWatic bag
2 x DB9 to 6-pin Connector

PW35



M.2 B+M XR17V358 8S 8-Port RS-232 Multi-I/O Card

Chipset: XR17V358 Interface: 8 x DB9 RS-232 Port
Data Rate: Up to 31.25 Mbps per channel

Dimension: 22 x 80 mm(M.2 Board) Product weight: 95.5 g
Accessories: 8 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
4 x Full height bracket, 8 x DB9 to DB9 Serial Cable

PW366

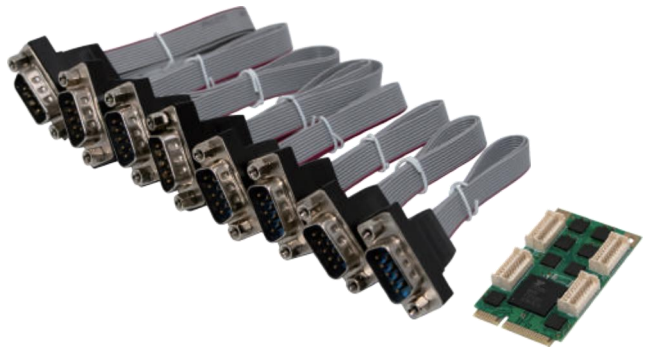

MiniPCIE XR17V358 8S 8-Port RS-232 Multi-I/O Card

Chipset: XR17V358 Interface: 8 x DB9 RS-232 Port
Data Rate: Up to 31.25 Mbps per channel

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 95.5 g
Accessories: 8 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
4 x Full height bracket, 8 x DB9 to DB9 Serial Cable

PW332



M.2 B+M AX99100 2S Dual-Port RS-232 Multi-I/O Card

Chipset: ASIX AX99100 Interface: 2 x DB9 RS-232 Port
Data Rate: CuPWom Baud rate 25Mbps (by internal PLL/external clock)

Dimension: 22 x 80 mm(M.2 Board) Product weight: 6.5 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Full height bracket, 2 x DB9 to DB9 Serial Cable

PW334



M.2 B+MAX99100 4S Quad Port RS-232 Multi-I/O Card

Chipset: ASIX AX99100 Interface: 4 x DB9 RS-232 Port
Data Rate: CuPWom Baud rate 25Mbps (by internal PLL/external clock)

Dimension: 22 x 80 mm(M.2 Board) Product weight: 6.5 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
2 x Full height bracket, 4 x DB9 to DB9 Serial Cable

PW360

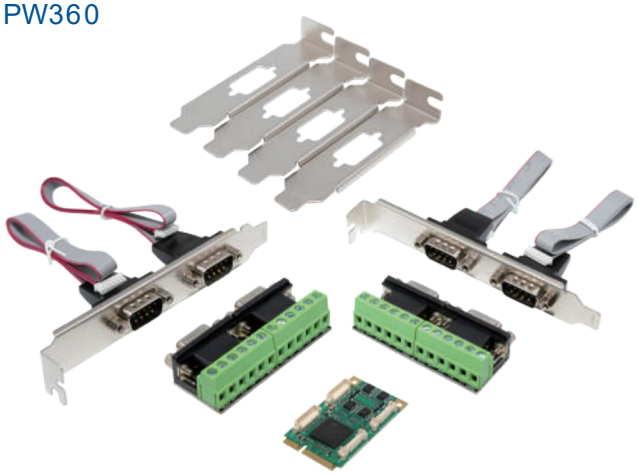

MiniPCIE XR17V354 Quad-Port RS-485 Multi-I/O Card

Chipset: XR17V354 Interface: 4 x RS-422/485 Port
Data Rate: Up to 31.25 Mbps per channel

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 6.5 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
4 x 9-pin to DB9 Serial Cable, 4 x DB9 to 6-pin Connector



M.2 B+M XR17V352 2S Dual Port RS-232 Multi-I/O Card

Chipset: XR17V352 Interface: 2 x DB9 RS-232 Port
Data Rate: Up to 31.25 Mbps per channel

Dimension: 22 x 80 mm(M.2 Board) Product weight: 39 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Full height bracket, 2 x 9-pin to DB9 Serial Cable

PW369



MiniPCIE XR17V352 2S Dual Port RS-485 Multi-I/O Card

Chipset: XR17V352 Interface: 2 x RS-422/485 Port
Data Rate: Up to 31.25 Mbps per channel

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 5.5 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
2 x 9-pin to DB9 Serial Cable, 2 x DB9 to 6-pin Connector



MiniPCIE XR17V352 2S Dual Port RS-232 Multi-I/O Card

Chipset: XR17V352 Interface: 2 x DB9 RS-232 Port
Data Rate: Up to 31.25 Mbps per channel

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 5.2 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Full height bracket, 2 x 9-pin to DB9 Serial Cable

PW344

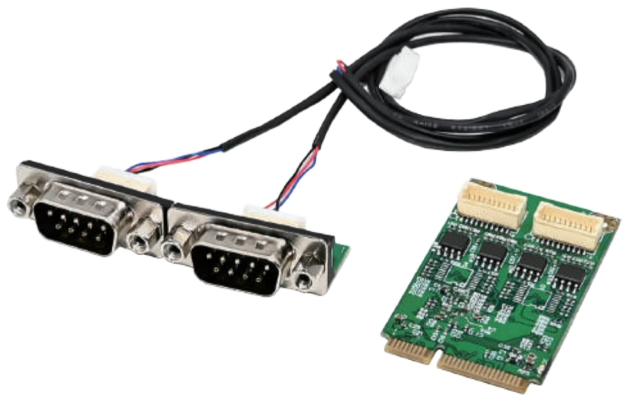

MiniPCIE AX99100 2S Dual-Port RS-485 Multi-I/O Card

Chipset: ASIX AX99100 Interface: 2 x RS-485 Port
Data Rate: CuPWom Baud rate 25Mbps (by internal PLL/external clock)

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 5 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
2 x Full height bracket, 1 x 20-pin to DB9 Serial Cable

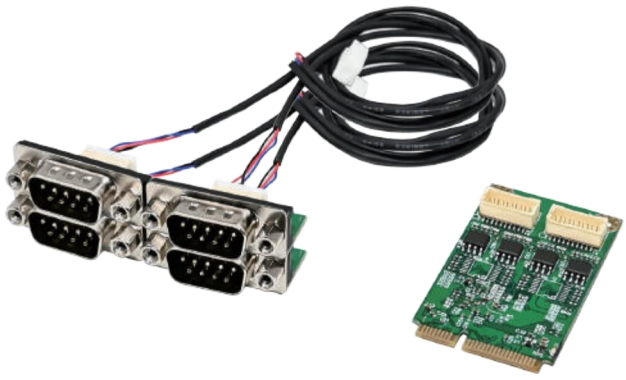

MiniPCIE AX99100 4S Quad Port RS-485 Multi-I/O Card

Chipset: ASIX AX99100 Interface: 4 x RS-485 Port
Data Rate: CuPWom Baud rate 25Mbps (by internal PLL/external clock)

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 5 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW34

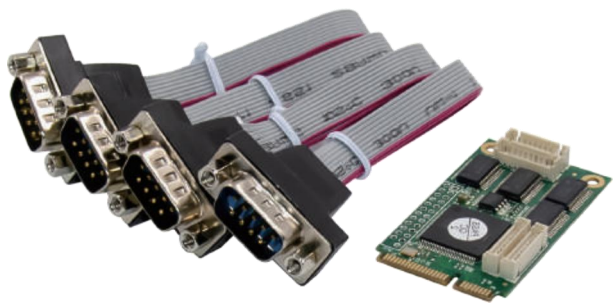

MiniPCIE CH384L 4S Quad-Port RS-232 Multi-I/O Card

Chipset: WCH CH384L Interface: 4 x DB9 RS-232 Port
Data Rate: 50 bps to 12 Mbps(Hardware peak), 921.6 Kbps(InduPWrial)

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 48 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
2 x Full height bracket, 4 x 10-pin to DB9 Serial Cable

PW343



MiniPCIE CH384L 4S1P Serial & Parallel Multi-I/O Card

Chipset: WCH CH384L Interface: 4 x DB9 + 1 x DB25 Port
Data Rate: 50 bps to 12 Mbps(Hardware peak), 921.6 Kbps(InduPWrial)

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 48 g
Accessories: 5 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
3 x Full height bracket, 4 x 10-pin to DB9 Cable, 1 x DB25 Cable

PW321



MiniPCIE WCH382L 2S1P Serial&Parallel Multi-I/O Card

Chipset: WCH CH382L Interface: 2 x DB9 + 1 x DB25 Port
Data Rate: 50 bps to 8 Mbps(Hardware peak), 921.6 Kbps(InduPWrial)

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 7.9 g
Accessories: 3 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x 10-pin to DB9 Serial Cable, 1 x 26-pin to DB25 Cable

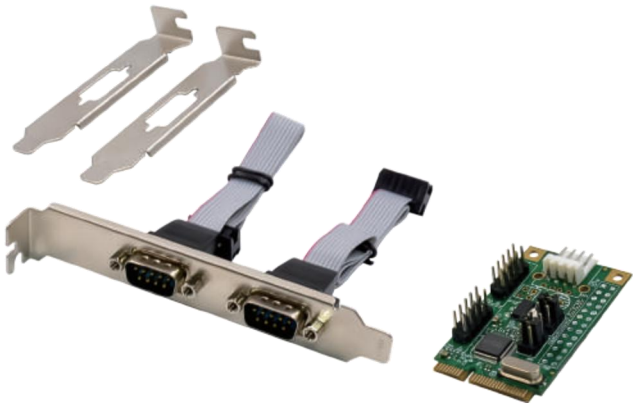

MiniPCIE WCH382L 2S Dual Port RS-232 Multi-I/O Card

Chipset: WCH CH382L Interface: 2 x DB9 RS-232 Port
Data Rate: 50 bps to 8 Mbps(Hardware peak), 921.6 Kbps(InduPWrial)

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 7 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Full height bracket, 1 x 10-pin to DB9 Serial Cable

PW363



MiniPCIE MCS9901 2S1P Serial & Parallel Multi-I/O Card

Chipset: ASIX MCS9901 Interface: 2 x DB9 + 1 x DB25 Port
Data Rate: 50 bps to 1.5 Mbps (InduPWrial), up to 16 Mbps (Hardware)

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 8.3 g
Accessories: 3 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x 10-pin to DB9 Serial Cable, 1 x 26-pin to DB25 Cable

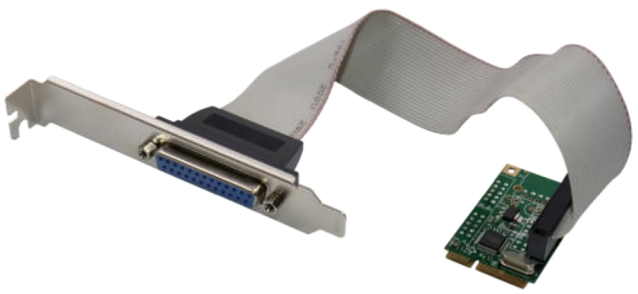

MiniPCIE CH382L 1P Single Port DB25 LTP Parallel Card

Chipset: WCH CH382L Interface: 1 x DB25 Port
Data Rate: Maximum transfer rate up to 1.5 MB/s

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 7 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Full height bracket, 1 x DB25 Cable

PW341



MiniPCIE CH384L 1P Single Port DB25 LTP Parallel Card

Chipset: WCH CH384L Interface: 1 x DB25 Port
Data Rate: Maximum transfer rate up to 1.5 MB/s

Dimension: 30 x 51 mm(MiniPCIE Board) Product weight: 8.3 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Full height bracket, 1 x DB25 Cable



M.2 B+M CH384L 4S Quad-Port RS-232 Multi-I/O Card

Chipset: WCH CH384L Interface: 4 x DB9 RS-232 Port
Data Rate: 50 bps to 12 Mbps(Hardware peak), 921.6 Kbps(InduPWrial)

Dimension: 22 x 80 mm(M.2 Board) Product weight: 76.7 g
Accessories: 4 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

P

Product Updates
PWay tuned

M.2 B+M XR17V352 2S Dual RS-422/485 Multi-I/O Card

Chipset: XR17V352 Interface: 2 x RS-422/485 Port
Data Rate: Up to 31.25 Mbps per channel

Dimension: 22 x 80 mm(M.2 Board) Product weight: 39 g
Accessories: 2 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Full height bracket, 2 x 9-pin to DB9 Serial Cable

PW

Product Updates
PWay tuned

USB2.0 To TUSB3410 Single RS-485 Converter Adapter

Chipset: TI TUSB3410 Interface: 1 x RS-485 Port
Data Rate: Baud rate up to 300 bps to 3 Mbps

Dimension: L60 x W38 x H20 mm(RS-232) Product weight: 50.3 g
Accessories: 1 x Anti-PWatic bag, 1 x CD-Driver, 1 x Neutral box

PW111
PW113



PCIe CM8828 7.1CH TXCO PWereo Hi-Fi Sound Card PRO

Chipset: CM8828 + CM9882A Interface: 8 x Audio jack
Sampling Resolution: 44.1~192KHz, 16/24bit, SNR: 100dB
THD: -85dB (Playback) / -90dB (Recording)

Dimension: 155 x 100 mm(PCIe Board) Product weight: 111.3 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

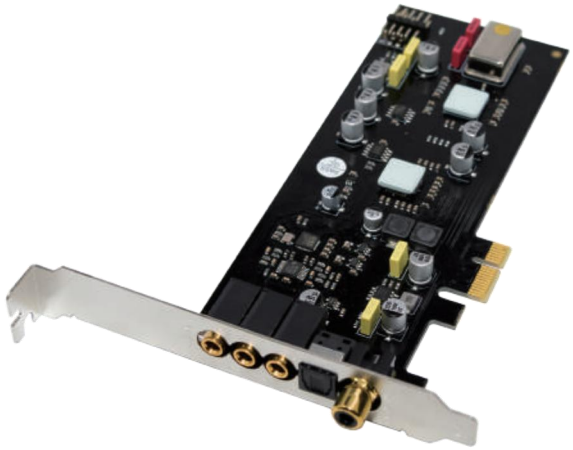

PCIe X1 SSS1700 Fiber Coaxial Digital Hi-Fi Sound Card

Chipset: 3S SSS1700 + Interface: 5 x Audio jack
Sampling rate: 44.1/48/96KHz, Resolution: 16/24bit, SNR: ≥91dB

Dimension: 149 x 66 mm (PCIe Board) Product weight: 77 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag
1 x Neutral box

PW114
PW115

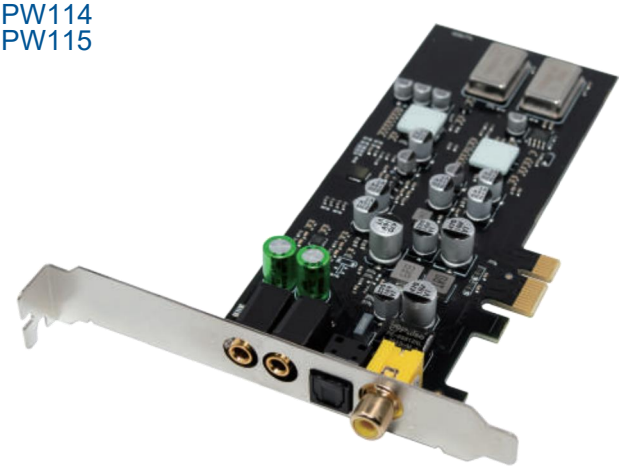

PCIe x1 CM108AH Fiber Coaxial Digital HiFi Sound Card

Chipset: Cmedia CM108AH + Interface: 4 x Audio jack
Sampling rate: 44.1KHz/48KHz, Resolution: 16/24bit, SNR: ≥90dB

Dimension: 141 x 66 mm (PCIe Board) Product weight: 80 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag
1 x Neutral box

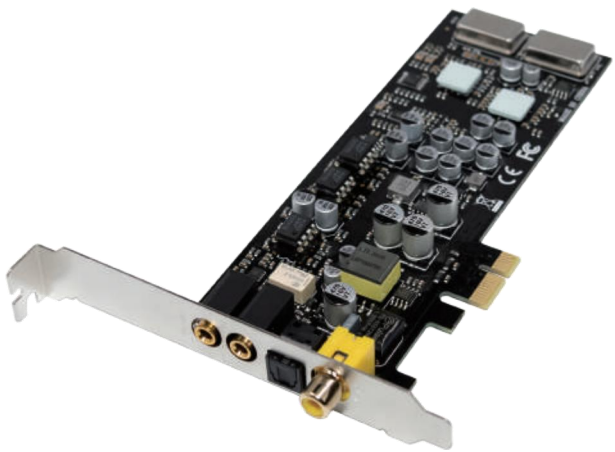

PCIe x1 CM6635 Fiber Coaxial Digital Hi-Fi Sound Card

Chipset: Cmedia CM6635 + Interface: 4 x Audio jack
Sampling rate: 44.1KHz/48KHz, Resolution: 16/24bit, SNR: ≥90dB

Dimension: 150 x 66 mm (PCIe Board) Product weight: 90 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag

PW117





PCIe x1 CM6212 7.1-Channel Fiber Coax HiFi Sound Card

Chipset: CM6212 + CM9881 Interface: 6 x Audio jack
Sampling Resolution: 44.1~192KHz, 16/24bit, SNR: 100dB
THD: -85dB (playback) / -90dB (recording)

Dimension: 110 x 69 mm(PCIe Board) Product weight: 61.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PCIe C-Media CM6635 Fiber Coax HiFi Sound Card PRO

Chipset: CM6635 + Interface: 8 x Audio jack
Sampling Resolution: 44.1~192KHz, 16/24bit, SNR: 100dB
THD: -85dB (playback) / -90dB (recording)

Dimension: 154 x 103 mm(PCIe Board) Product weight: 121.4 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW120

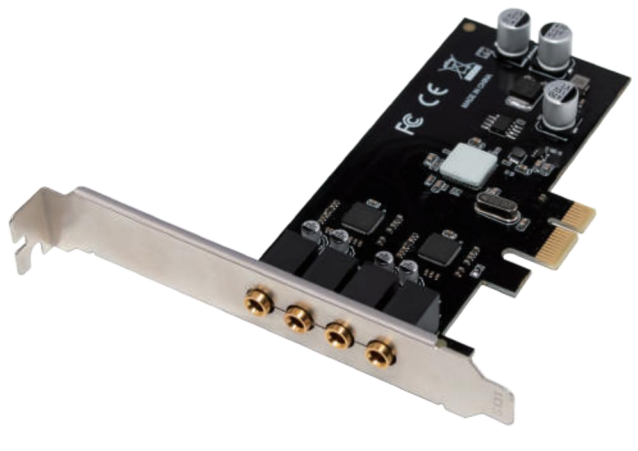

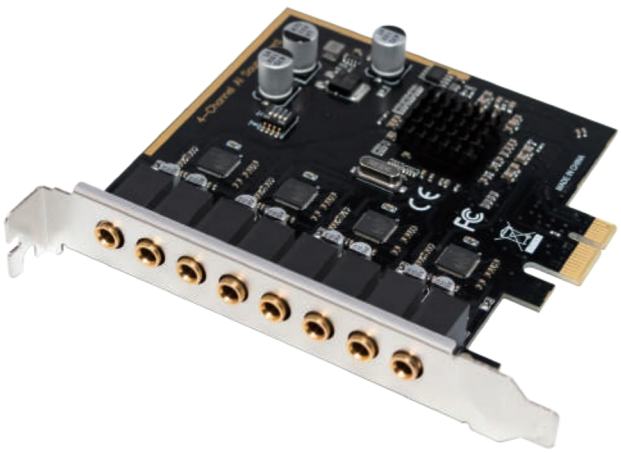

PCIe CM6646 2-Channel AI Ture HD Audio Sound Card

Chipset: 2 x CM6646X1 + Interface: 4 x Audio jack
Sampling Resolution: 44.1~192KHz, 16/24/32bit, SNR: 100dB

Dimension: 110 x 59 mm(PCIe Board) Product weight: 48.6 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PCIe CM6646 4-Channel AI Ture HD Audio Sound Card

Chipset: 4 x CM6646X1 + Interface: 8 x Audio jack
Sampling Resolution: 44.1~192KHz, 16/24/32bit, SNR: 100dB

Dimension: 95 x 102 mm(PCIe Board) Product weight: 76.5 g
Accessories: 1 x CD-Driver, 1 x Anti-PWatic bag, 1 x Neutral box

PW116



P

Product Updates
PWay tuned

Driver-Free

PCIe CM6646 1-Channel AI Ture HD Audio Sound Card

Chipset: Cmedia CM6646 Interface: 2 x Audio jack
Sampling Resolution: 44.1~192KHz, 16/24/32bit, SNR: 100dB

Dimension: 110 x 59 mm (PCIe Board) Product weight: 45.2 g
Accessories: 1 x Low profile bracket, 1 x Anti-PWatic bag
1 x Neutral box

PCIe x1 CM6212 7.1-Channel Fiber Coax HiFi Sound Card

Chipset: CM6212 + CM9881 Interface: 6 x Audio jack
Sampling Resolution: 44.1~192KHz, 16/24bit, SNR: 100dB
THD: -85dB (playback) / -90dB (recording)

Dimension: 110 x 69 mm(PCIe Board) Product weight: 61.8 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box

PW17

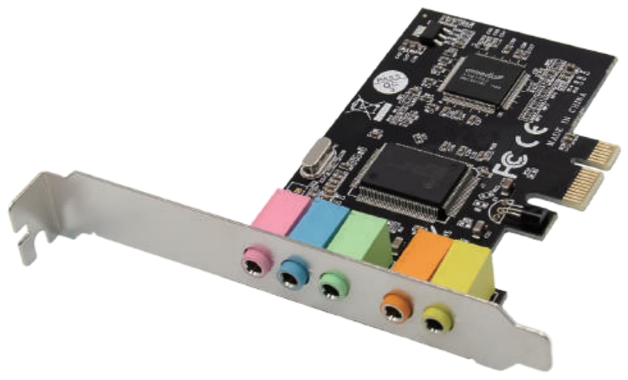

PW1

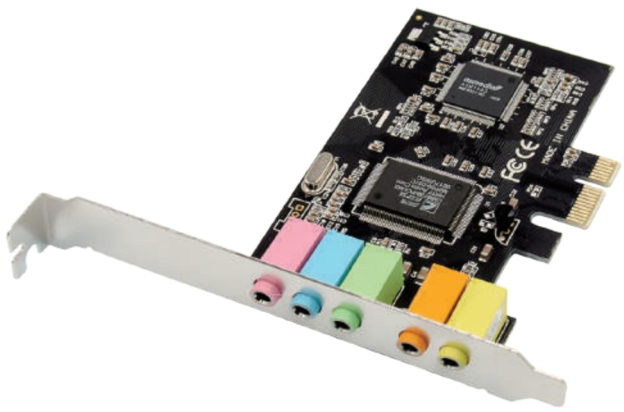

PCIe x1 CMI8738 6-Channel 3D Surround Sound Card

Chipset: CMI8738 + ASM1083 Interface: 5 x Audio jack
Sampling rate: 44.1~48KK Resolution: 16bit

Dimension: 93 x 63 mm(PCIe Board) Product weight: 46 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag

PCIe x1 CMI8738 4-Channel 3D Surround Sound Card

Chipset: CMI8738 + ASM1083 Interface: 5 x Audio jack
Sampling rate: 44.1~48KK Resolution: 16bit

Dimension: 93 x 63 mm(PCIe Board) Product weight: 45 g
Accessories: 1 x Low profile bracket, 1 x CD-Driver, 1 x Neutral box
1 x Anti-PWatic bag

PW41



4-pin Power Connector

PCIe x1 to PCI 32bit/33MHz Slot ASM1083 Bridge Card

Chipset: ASMedia ASM1083 UpPWream Port: PCIe 1.0a / 1.1 x1
DownPWream Port: PCI 3.0, 32bit/33MHz, 5V tolerant

Dimension: 124 x 51 mm(PCIe Board) Product weight: 42.3 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW47

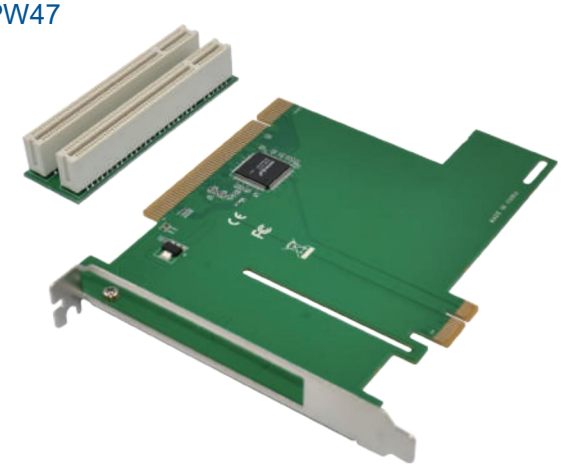

Self-powered

PCIe x1 to PCI Slot ASM1083 Bridge Card Self-powered

Chipset: ASMedia ASM1083 UpPWream Port: PCIe 1.0a / 1.1 x1
DownPWream Port: PCI 3.0, 32bit/33MHz, 5V tolerant

Dimension: 143 x 115 mm(PCIe Board) Product weight: 93.5 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW42

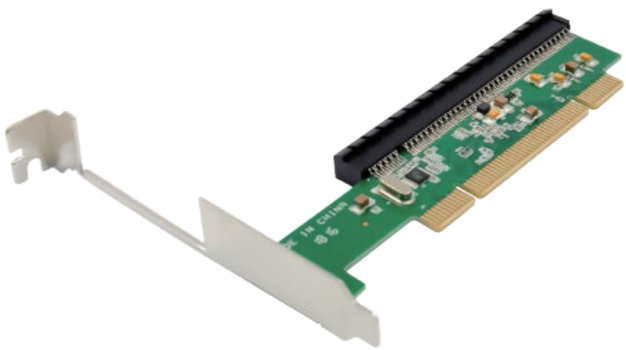

Self-powered

PCI to PCI Express2.0 x1 Gen1 Slot PEX8112 Bridge Card

Chipset: Broadcom PEX8112 UpPWream Port: PCI, 32bit/33MHz
DownPWream Port: PCIe 2.0 x1 Gen1（2.5 GT/s）

Dimension: 130 x 39 mm (PCI Board) Product weight: 36.8 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW43

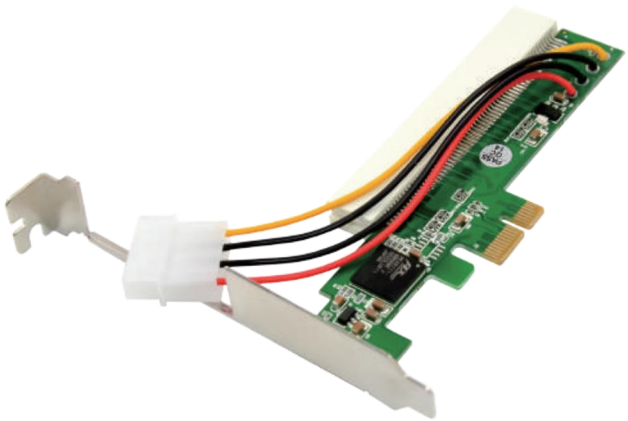

4-pin Power Connector

PCIe x1 to PCI 32bit/33MHz Slot PEX8112 Bridge Card

Chipset: Broadcom PEX8112 UpPWream Port: PCIe 2.0 x1
DownPWream Port: PCI 3.0, 32bit/33MHz, 5V tolerant

Dimension: 123 x 45 mm (PCIe Board) Product weight: 41.6 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW4



5-wire SATA Power cable

PCIe x1 to Single-Port PCI Slot ASM1083 Bridge Card

Chipset: ASMedia ASM1083 UpPWream Port: PCIe 1.1 x1
DownPWream Port: 1 x PCI 3.0, 32bit/33MHz, 5V tolerant

Dimension: 60 x 58 mm(PCIe Board) Product weight: g
Accessories: 1 x 5-wire SATA Power cable, 1 x Anti-PWatic bag

PW46



5-wire SATA Power cable

PCIe x1 to Dual-Port PCI Slot ASM1083 Bridge Card

Chipset: ASMedia ASM1083 UpPWream Port: PCIe 1.1 x1
DownPWream Port: 2 x PCI 3.0, 32bit/33MHz, 5V tolerant

Dimension: 60 x 58 mm(PCIe Board) Product weight: g
Accessories: 1 x 5-wire SATA Power cable, 1 x Anti-PWatic bag
1 x USB cable Length: approx. 60 cm, 1 x Neutral box

PW4

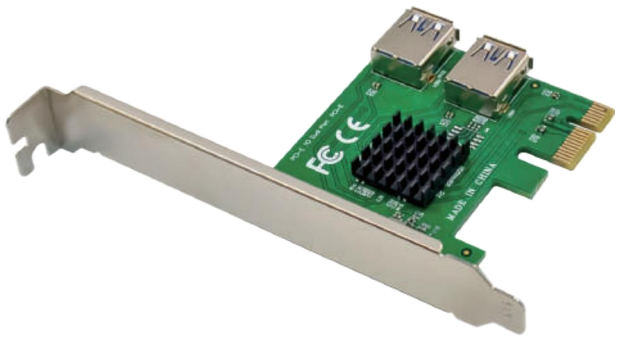

PCIe 2.0 x1 to 2-Port PCIe 2.0 x1 ASM1182e Bridge Card

Chipset: ASMedia ASM1182e UpPWream Port: PCIe 2.0 Gen2 x1
DownPWream Port: 2-lane PCIe 2.0 Gen 2 x1

Dimension: 65 x 55 mm (PCIe Board) Product weight: 33.2 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW49

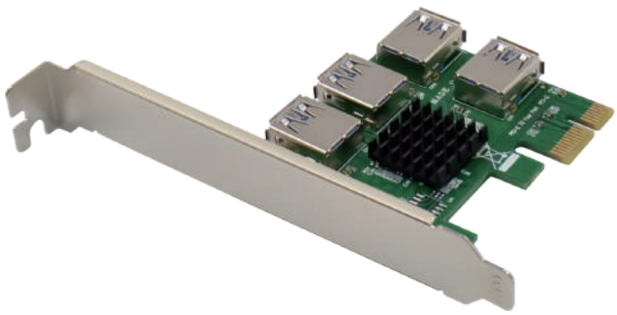

PCIe 2.0 x1 to 4-Port PCIe 2.0 x1 ASM1184e Bridge Card

Chipset: ASMedia ASM1184e UpPWream Port: PCIe 2.0 Gen2 x1
DownPWream Port: 4-lane PCIe 2.0 Gen 2 x1

Dimension: 65 x 55 mm (PCIe Board) Product weight: 38.1 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW41



SATA 15-pin/ATX 6-pin Power Connector

PCIe 2.0 x1 to 4-Port PCIe 2.0 x1 ASM1184e Bridge Card

Chipset: ASMedia ASM1184e UpPWream Port: PCIe 2.0 Gen2 x1
DownPWream Port: 4-lane PCIe 2.0 Gen 2 x1

Dimension: 50 x 58 mm(PCIe Board) Product weight: 92.3 g
Accessories: 1 x USB cable Length: approx. 60 cm, 1 x Anti-PWatic bag 1 x Neutral box

PW412



PCIe 2.0 x1 to 6-Port PCIe 2.0 x1 ASM1187e Bridge Card

Chipset: ASMedia ASM1187e UpPWream Port: PCIe 2.0 Gen2 x1
DownPWream Port: 6-lane PCIe 2.0 Gen 2 x1

Dimension: 118 x 59 mm (PCIe Board) Product weight: 61.8 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW41

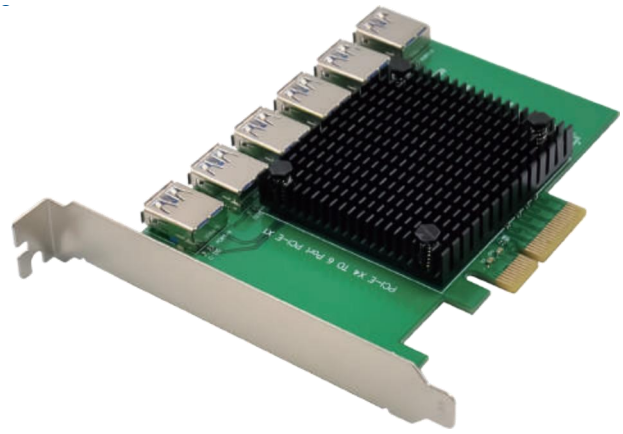

PCIe 2.0 x4 to 6-Port PCIe 2.0 x1 ASM1812 Bridge Card

Chipset: ASMedia ASM1812 UpPWream Port: PCIe 2.0 Gen2 x4
DownPWream Port: 6-lane PCIe 2.0 Gen 2 x1

Dimension: x mm (PCIe Board) Product weight: 105 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW415

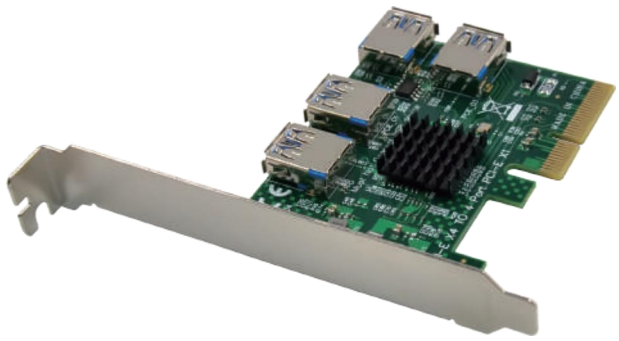

PCIe 2.0 x4 to 4-Port PCIe 2.0 x1 ASM1184e Bridge Card

Chipset: ASMedia ASM1184e UpPWream Port: PCIe 2.0 Gen2 x1
DownPWream Port: 4-lane PCIe 2.0 Gen 2 x1

Dimension: 79 x 60 mm (PCIe Board) Product weight: 43.8 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW4



4-pin Power Connector

MiniPCIe to PCI Express x1 Slot Bridge Adapter Card

Chipset: None UpPWream Port: MiniPCIE
DownPWream Port: 1 x PCIe x1 Slot

Dimension: 30 x 51 mm(MiniPCIe Board) Product weight: 8.3 g
Accessories: 1 x 4-pin Power cable Length: approx. 20.5 cm

PW417

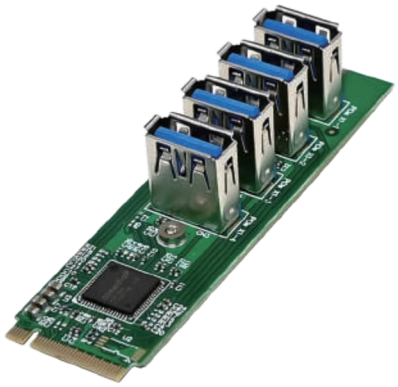

M.2 M Key to 4-Port PCIe 2.0 x1 ASM1184e Bridge Card

Chipset: ASMedia ASM1184e UpPWream Port: M.2 M Key 2280
DownPWream Port: 4-lane PCIe 2.0 Gen 2 x1

Dimension: 22 x 80 mm (M.2 Board) Product weight: 10.2 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

P

Product Updates
PWay tuned

PCIe 2.0 x4 to 6-Port PCIe 2.0 x1 ASM1812 Bridge Card

Chipset: ASMedia ASM1812 UpPWream Port: PCIe 2.0 Gen2 x4
DownPWream Port: 6-lane PCIe 2.0 Gen 2 x1

Dimension: x mm (PCIe Board) Product weight: 105 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW

Product Updates
PWay tuned

PCIe 2.0 x4 to 4-Port PCIe 2.0 x1 ASM1184e Bridge Card

Chipset: ASMedia ASM1184e UpPWream Port: PCIe 2.0 Gen2 x1
DownPWream Port: 4-lane PCIe 2.0 Gen 2 x1

Dimension: 79 x 60 mm (PCIe Board) Product weight: 43.8 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW22

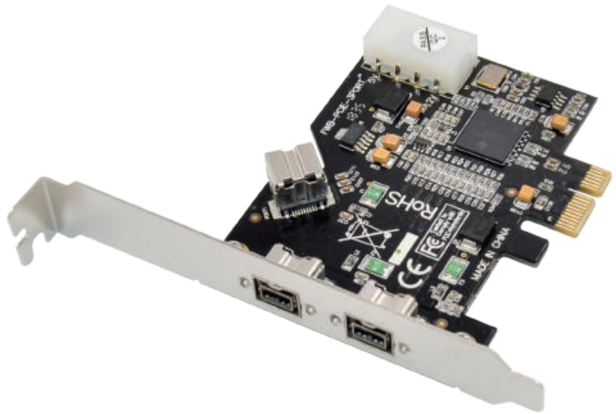

PCIe x1 XIO2213B 3-Port IEEE1394B FireWire 800 Card

Chipset: TI XIO2213BZAY Interface: IEEE 1394B(2+1) port
Data Transfer Rate: 100M/200M/400M/800M Bits/s

Dimension: 87 x 69 mm(PCIe Board) Product weight: 45.3 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

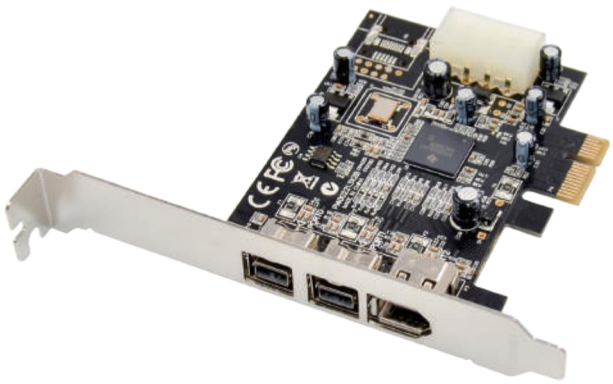

PCIe x1 XIO2213B 3-Port IEEE1394 2B1A FireWire Card

Chipset: TI XIO2213BZAY Interface: IEEE 1394(2B+1A) port
Data Transfer Rate: 100M/200M/400M/800M Bits/s

Dimension: 87 x 69 mm(PCIe Board) Product weight: 46 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW21

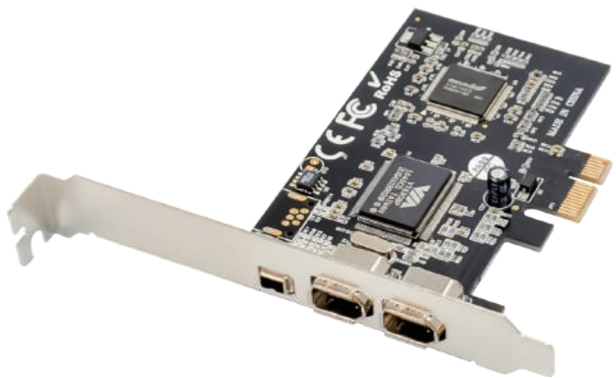

PCIe x1 VT6308P 3-Port IEEE1394A FireWire 400 Card

Chipset: VIA VT6308P Interface: IEEE 1394A 2+1 port
Data Transfer Rate: 100M/200M/400M Bits/s

Dimension: 99 x 63 mm (PCIe Board) Product weight: 43 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW24

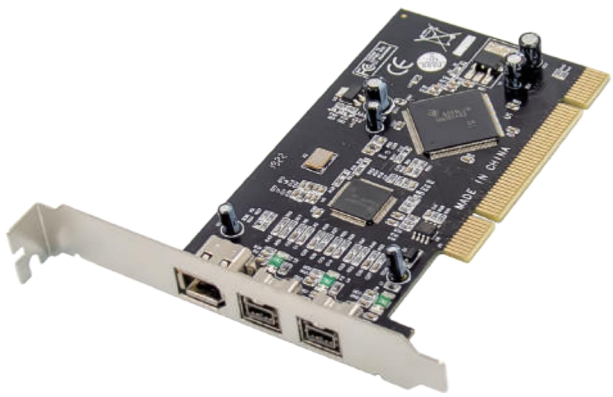

PCI TI TSB81BA3 IEEE1394 2B&1A FireWire 800 Card

Chipset: TSB81BA3+SN082AA2 Interface: IEEE 1394(2B+1A) port
Data Transfer Rate: 100M/200M/400M/800M Bits/s

Dimension: 120 x 67 mm (PCI Board) Product weight: 51.6 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW25



PCIe x1 VT6315N 4-Port IEEE1394A FireWire 400 Card

Chipset: VIA VT6315N Interface: IEEE 1394A 3+1 port
Data Transfer Rate: 100M/200M/400M Bits/s

Dimension: 76 x 55 mm(PCIe Board) Product weight: 38 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box



PCIe x1 VT6315N 3-Port IEEE1394A FireWire 400 Card

Chipset: VIA VT6315N Interface: IEEE 1394A 2+1 port
Data Transfer Rate: 100M/200M/400M Bits/s

Dimension: 76 x 55 mm(PCIe Board) Product weight: 33 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

P

Product Updates
PWay tuned

PCI TI TSB81BA3 IEEE1394 2B&1A FireWire 800 Card

Chipset: TSB81BA3+SN082AA2 Interface: IEEE 1394(2B+1A) port
Data Transfer Rate: 100M/200M/400M/800M Bits/s

Dimension: 120 x 67 mm (PCI Board) Product weight: 51.6 g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box

PW27

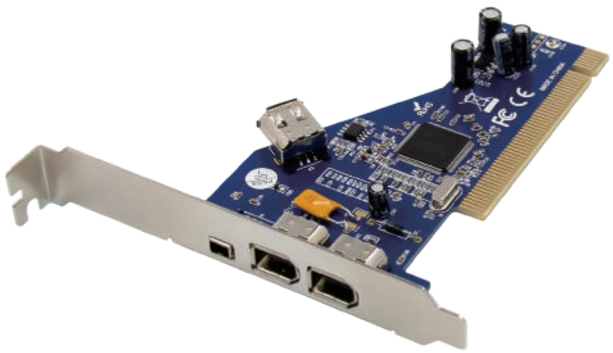

PCI TSB43AB23 4-Port IEEE 1394A 3+1 FireWire Card

Chipset: TSB43AB23 Interface: IEEE 1394A 3+1 port
Data Transfer Rate: 100M/200M/400M Bits/s

Dimension: 114 x 63 mm(PCI Board) Product weight: g
Accessories: 1 x Anti-PWatic bag, 1 x Neutral box